



Well Q

***A Mark of Schlumberger**

SonicVISION

WELL: JIP II GC 955 Q

County: NAD27 15N, ft.

COUNTRY: U.S.A.

Date Processed: 29-Apr-2009

X = 2474996.00 ft

KB: 51ft
DF: 51ft

GL: -6516ft

Job Number:

FOLD HERE The well name, location and borehole reference data were furnished by the customer.

All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretations made by any of our officers, agents or employees. These interpretations are also subject to Clause 4 of our General Terms and Conditions as set out in our current Price Schedule.

Engineer:

Log Analyst: Bill Lawton


Bitsize: 8.5in

Sea Water

Mud Density: 10lbm/gal


Remarks:

MD
1 : 240
ft

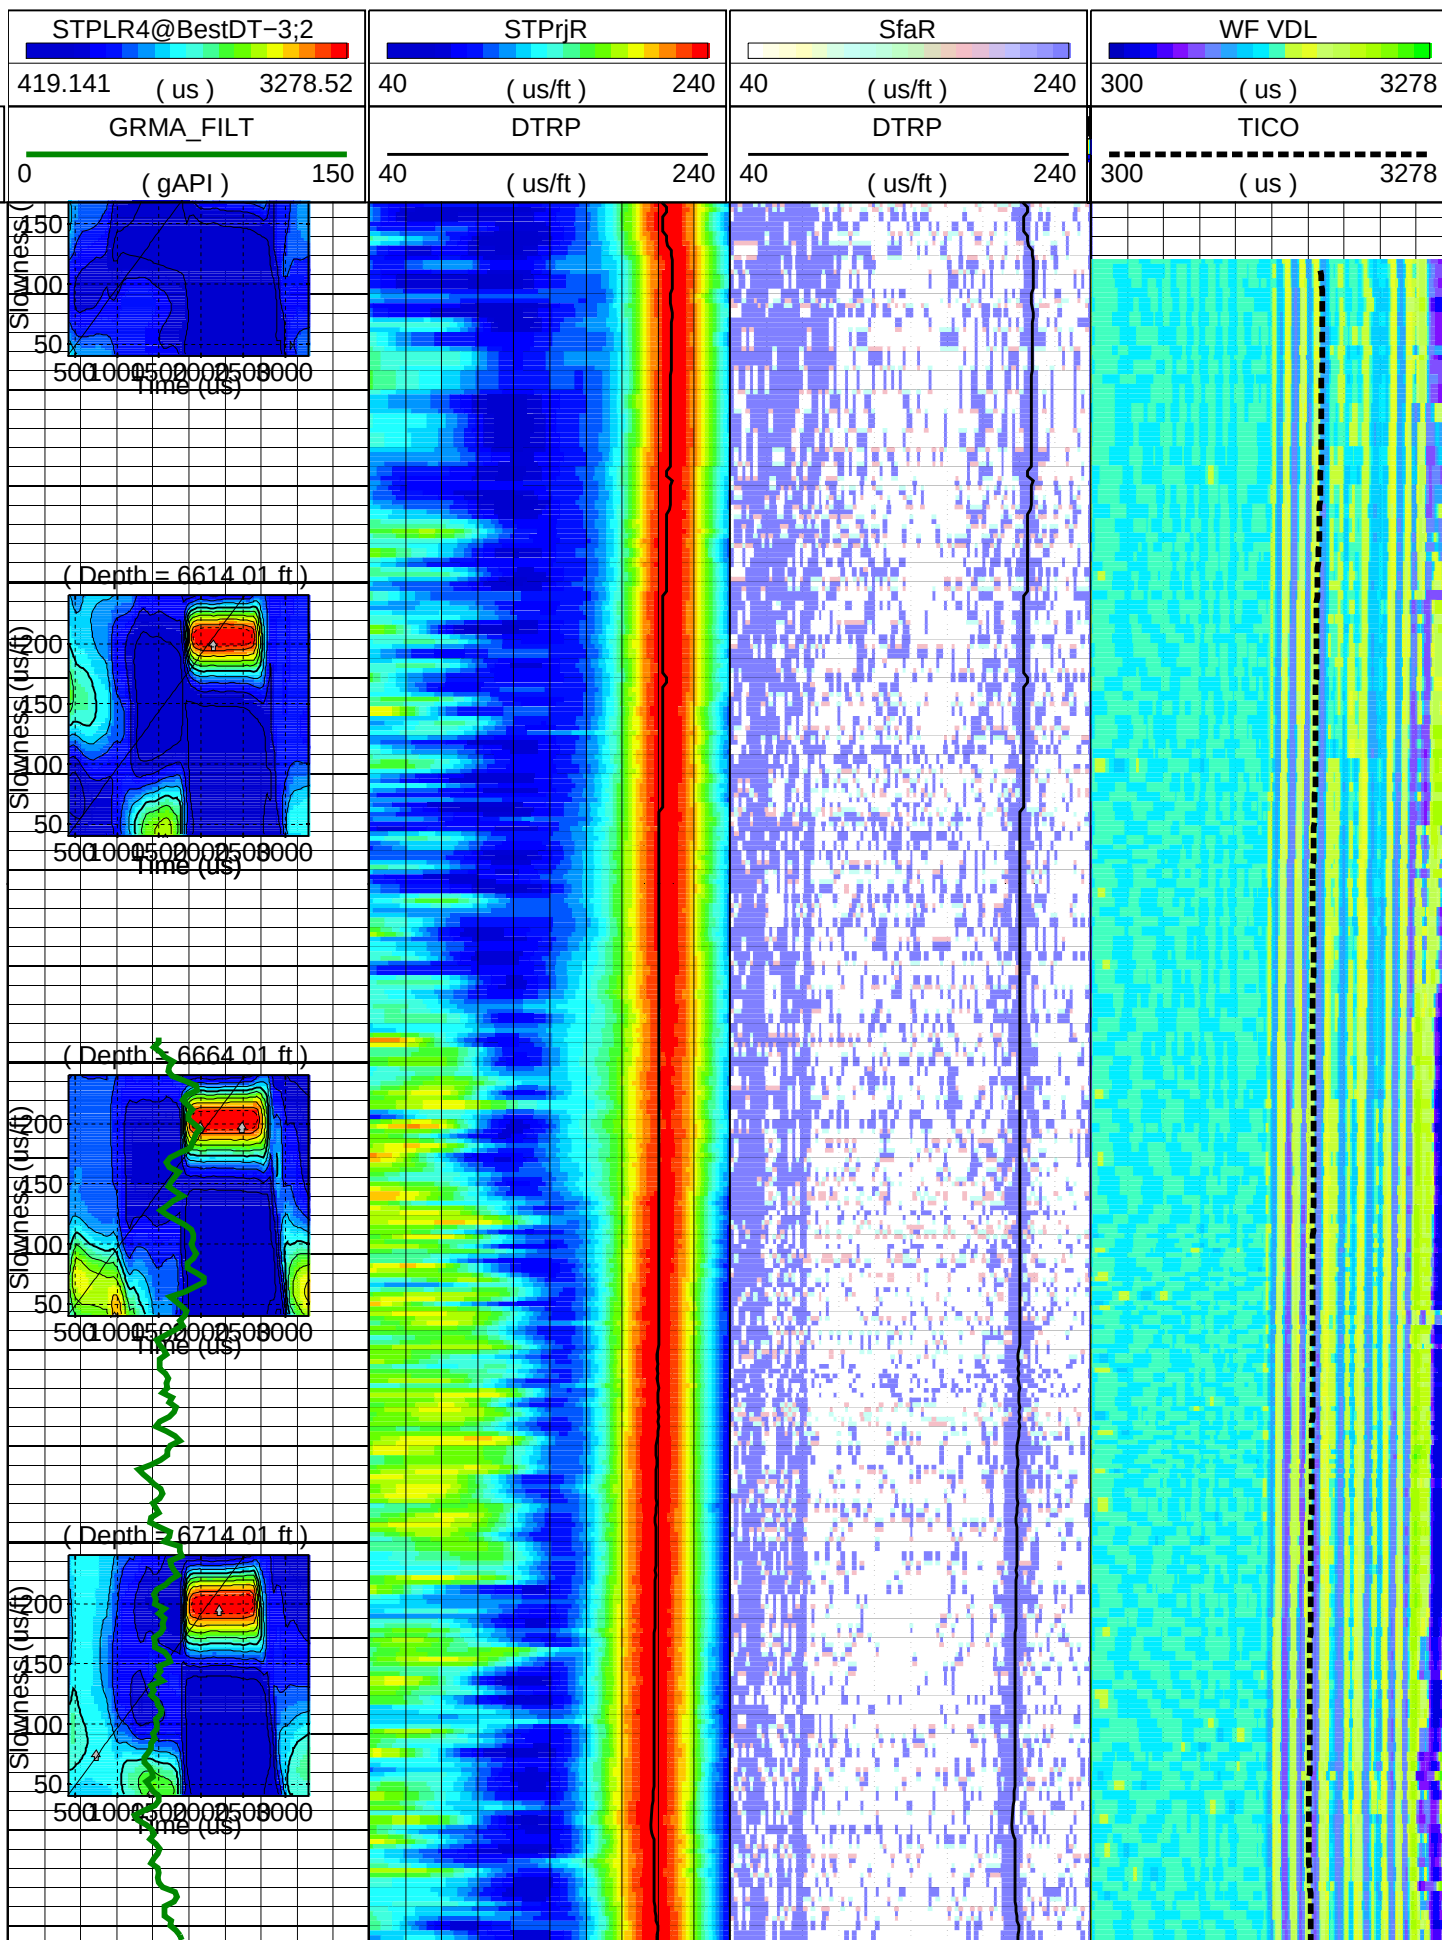


6750

(Depth = 6764.01 ft.)




6800

(Depth = 6814.01 ft.)




6850

(Depth = 6864.01 ft.)




6900


(Depth = 6914.01 ft.)



6950


(Depth = 6964.01 ft.)



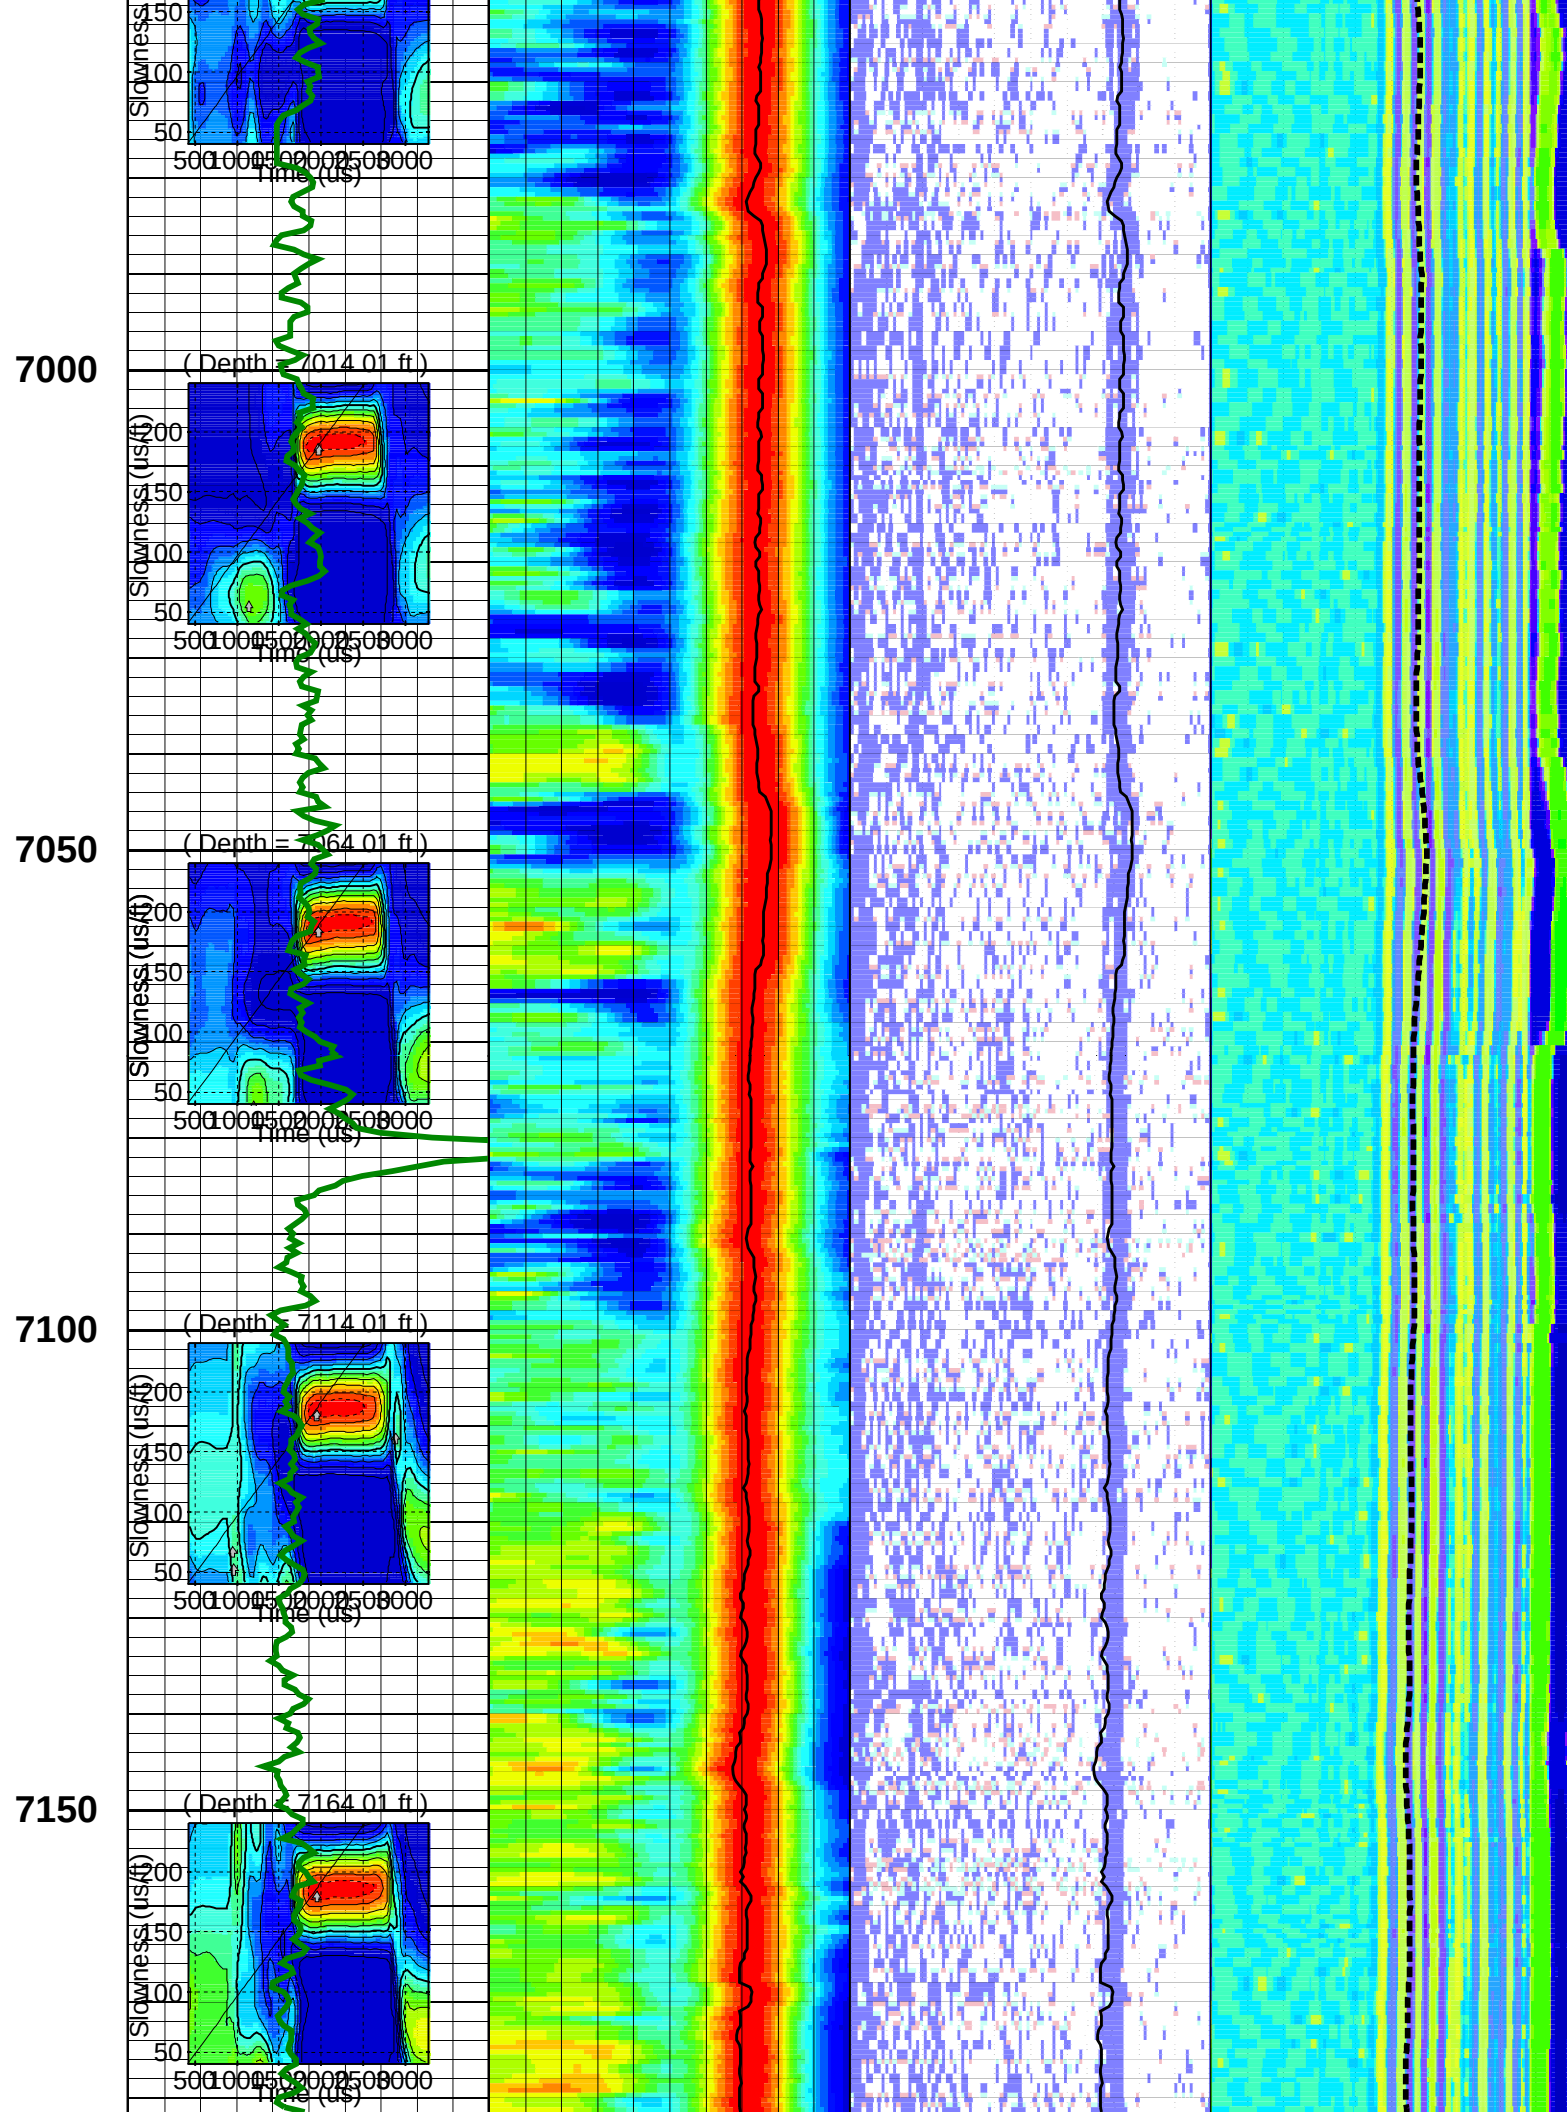


7200

(Depth = 7214.01 ft.)




7250

(Depth = 7264.01 ft.)




7300

(Depth = 7314.01 ft.)




7350

(Depth = 7364.01 ft.)




7400


(Depth = 7414.01 ft.)

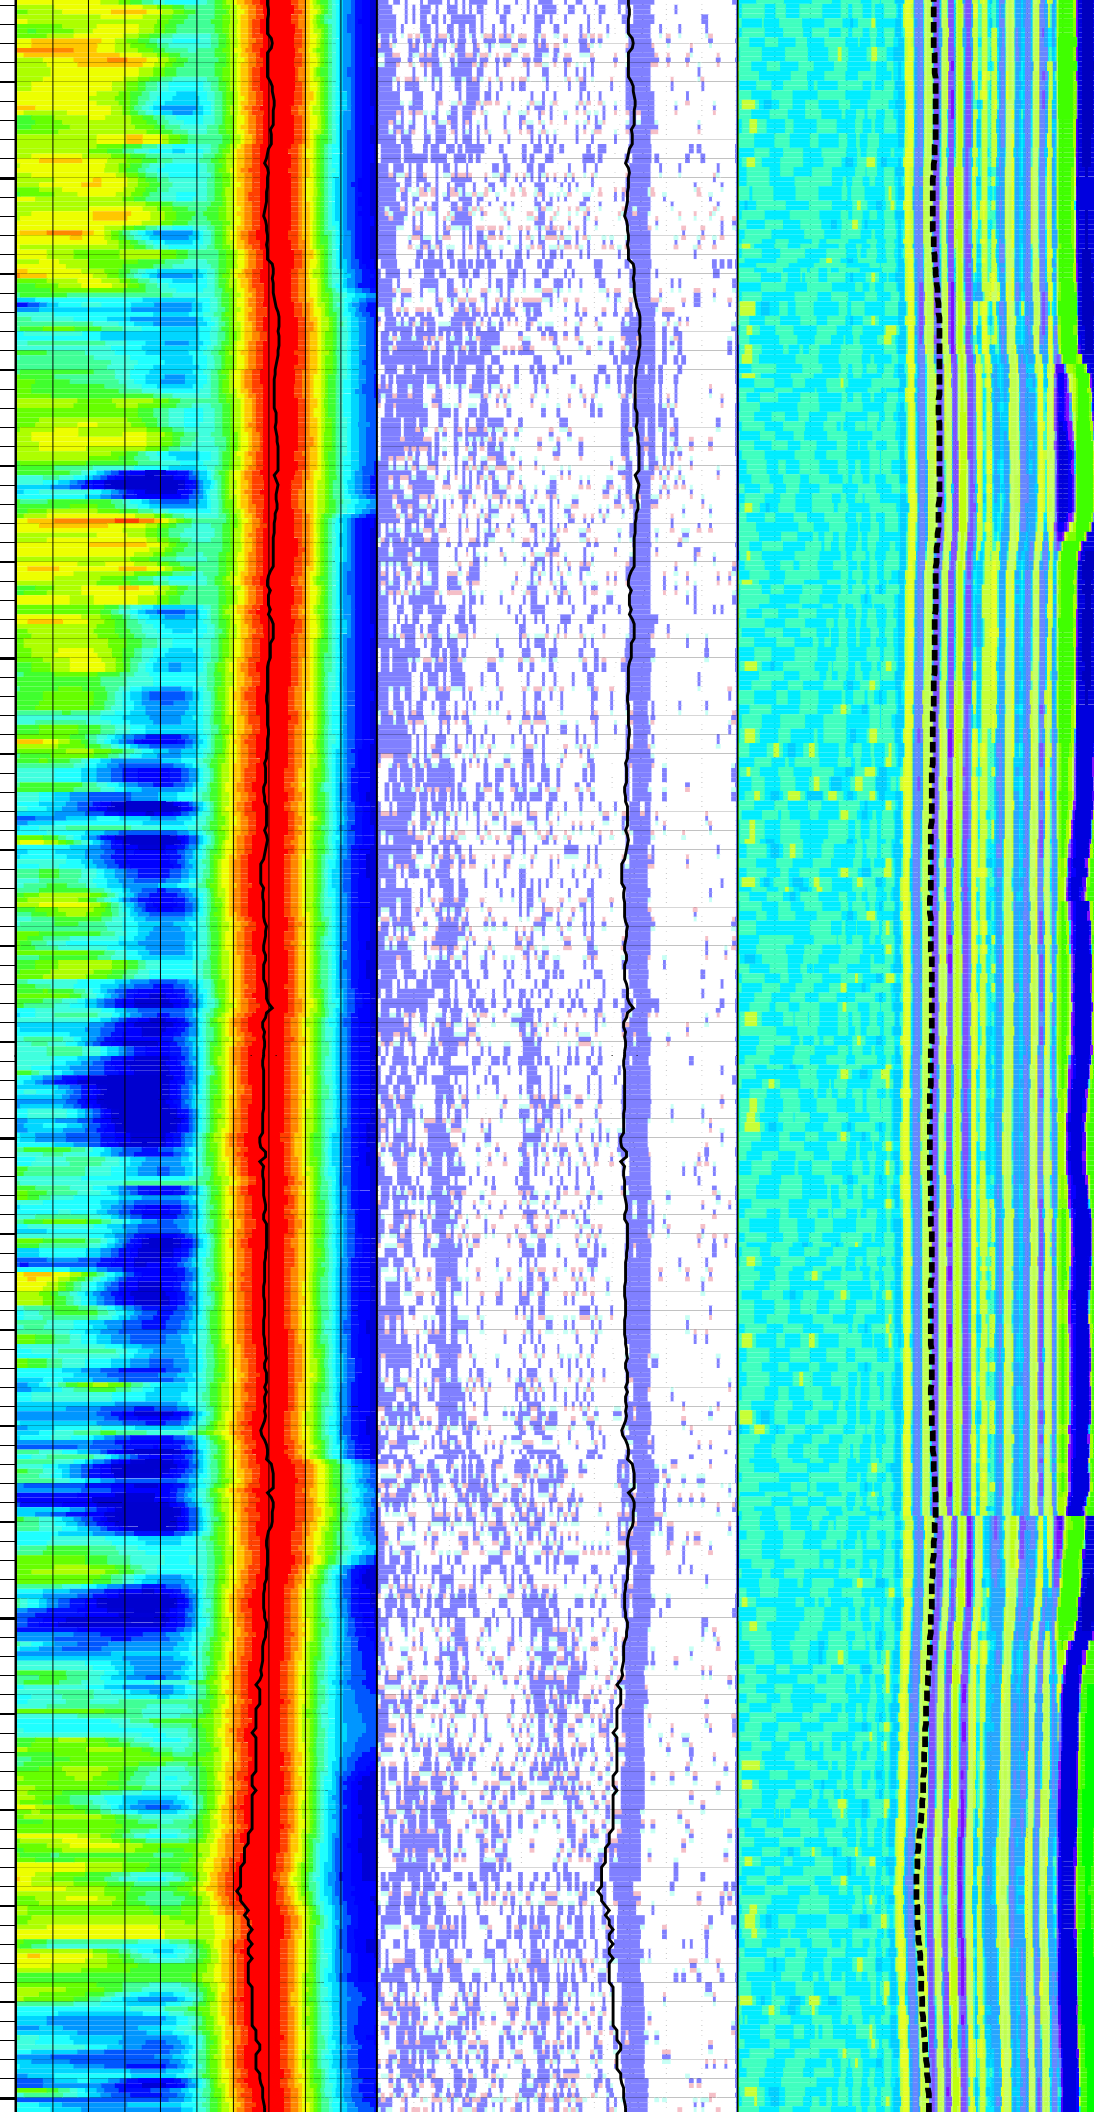


7450





7500



7550




7600

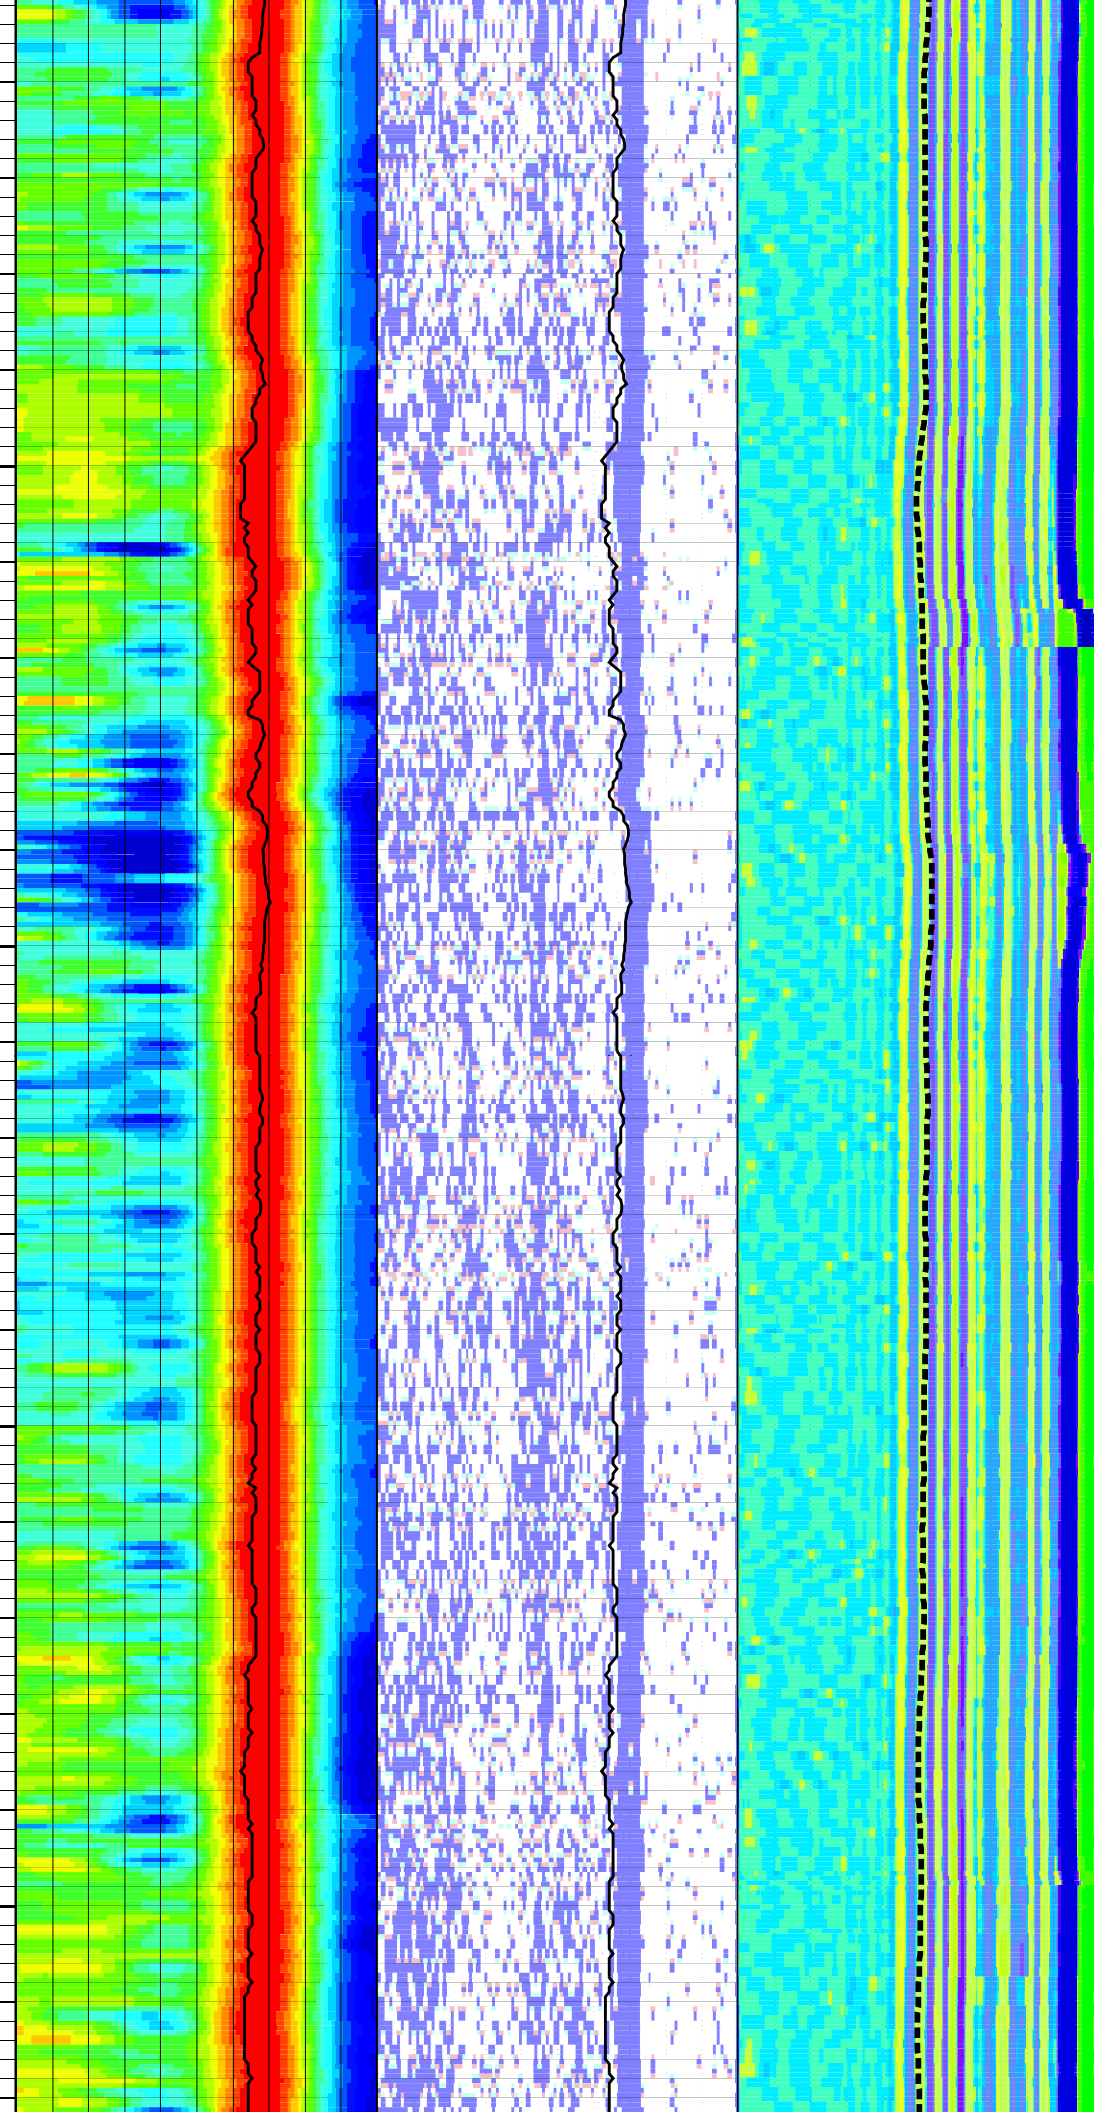


7650

(Depth = 7664.01 ft.)




7700

(Depth = 7714.01 ft.)




7750

(Depth = 7764.01 ft.)




7800

(Depth = 7814.01 ft.)





7850

(Depth = 7864.01 ft)



7900

(Depth = 7914.01 ft)

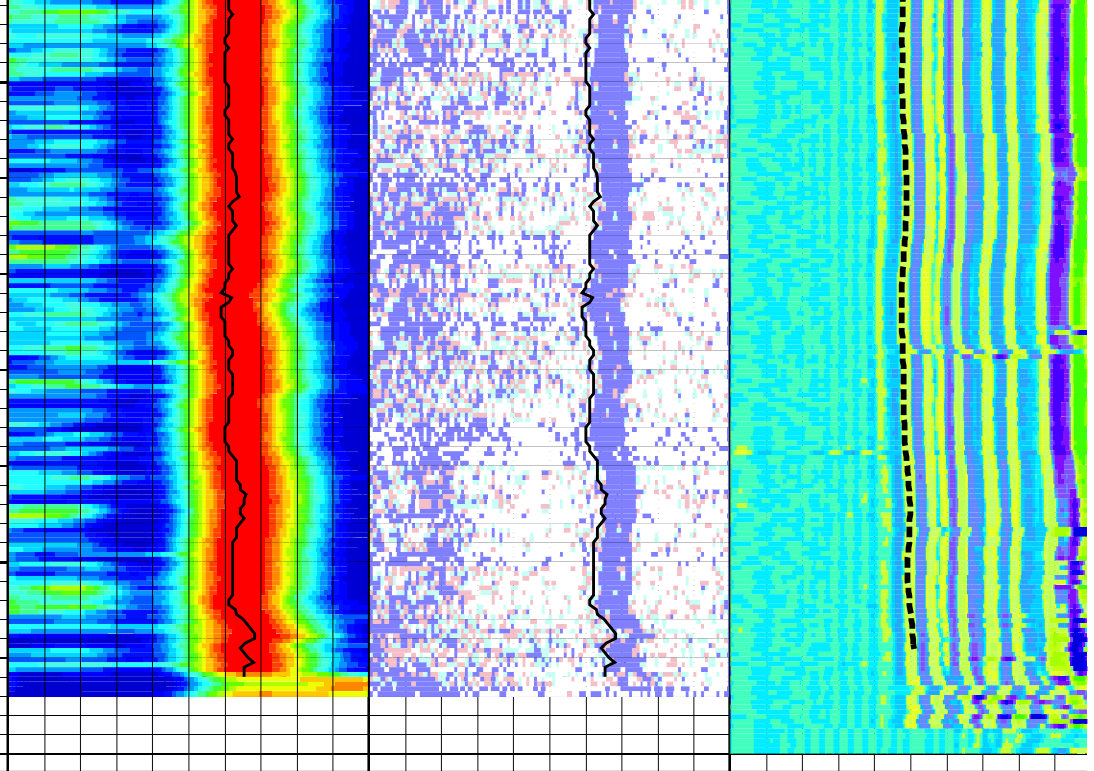

Customized Process: Start Depth (7914.01 ft), Stop Depth (6560.51 ft), Logging Mode (ISONIC - MPS_VSLP)
Noise Cut Filtering(No), Casing Cut Filtering(No)
WF_FLG(1 1 1 1), MUD_TYPE(WBM), DTMUD(205), STCAL(Full Array)
TRSPAC(9.85), RRSPAC(0 0.666667 1.33333 2)
Hole Diameter (no input)
Zoning Guide (no input)
Tracking Guide (no input)


7950

---- Zone Top Depth (0), Zone Name (Zone1) ----
SFTY(Extremely Slow), BHS(OPEN), CSIZ(7), HDM(Fix*), HD(8.5), DFNM(Vp/Vs Based*), DFVPVS(4*)
TWI(595.703*), SLL(40.4227*), SUL(240.409*), SST(2.12751*), TLL(419.141), TUL(3278.52), TST(39.7135)
SBW(1500*), SBO(550), SWD(20), TWD(900), SEM(0.45), FLENG(49*), FLOW(2500*), FHIGH(3500*)
TKO_MODEL_ORDER(2), TKO_TOL(50) TKO_FLOW(0), TKO_FHIGH(12000)

MD 1 : 240 ft	GRMA_FILT		DTRP		DTRP		TICO	
	0 (gAPI) 150		40 (us/ft) 240		40 (us/ft) 240		300 (us) 3278	
	STPLR4@BestDT-3;2		STPrjR		SfaR		WF VDL	
	419.141 (us) 3278.52		40 (us/ft) 240		40 (us/ft) 240		300 (us) 3278	


Slowness Dispersion Plot

(Depth= 6597.01 ft)

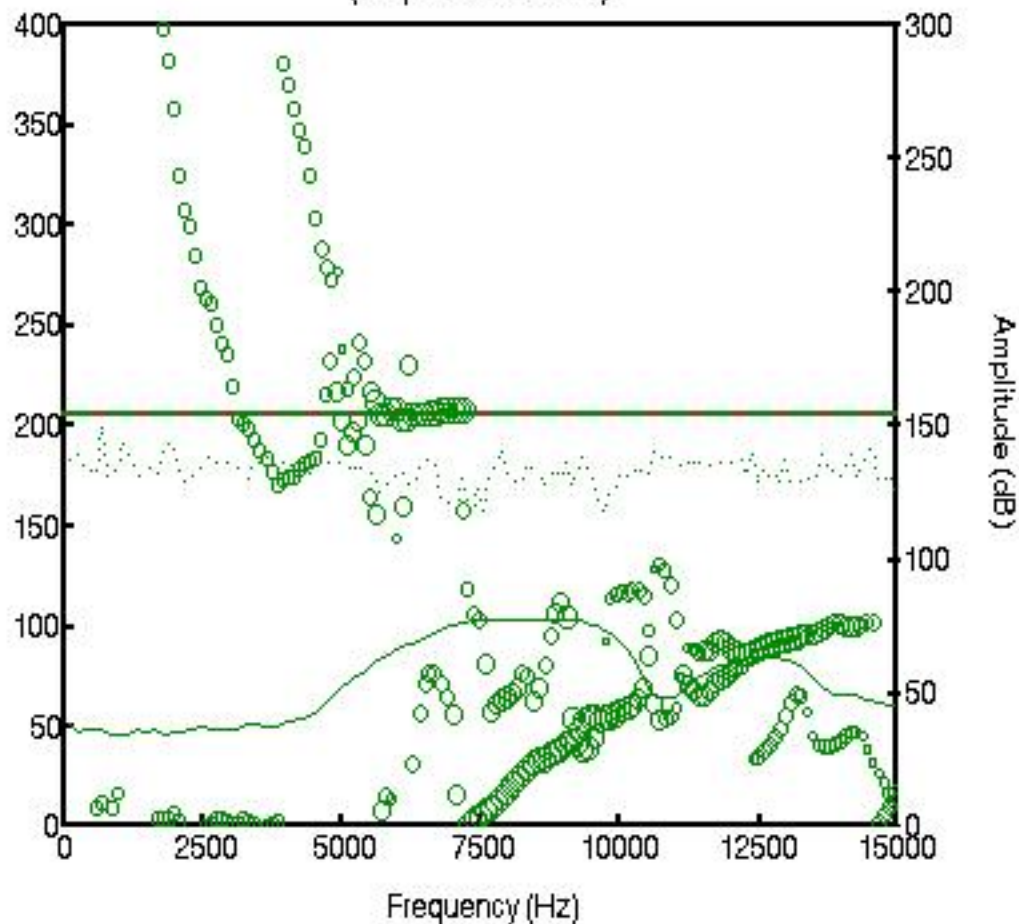


Slowness Dispersion Plot

(Depth= 7002.01 ft)

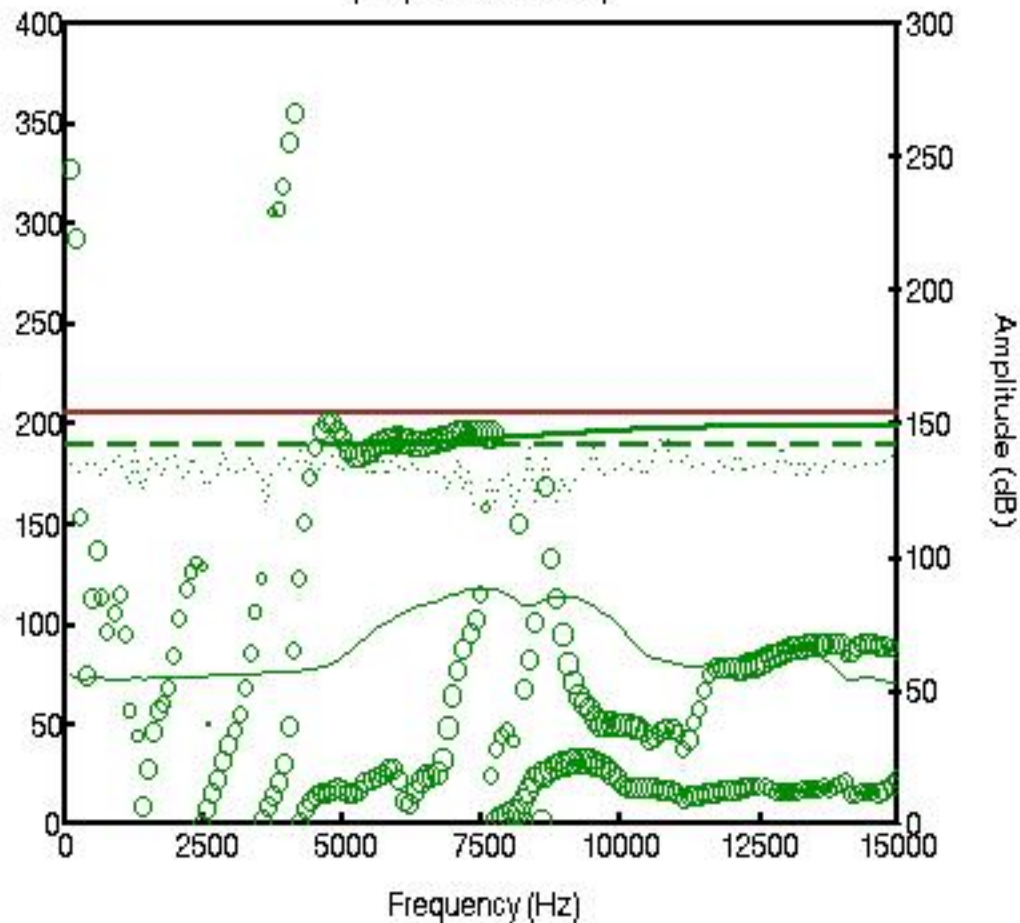

Slowness Dispersion Plot

(Depth= 7500.01 ft)

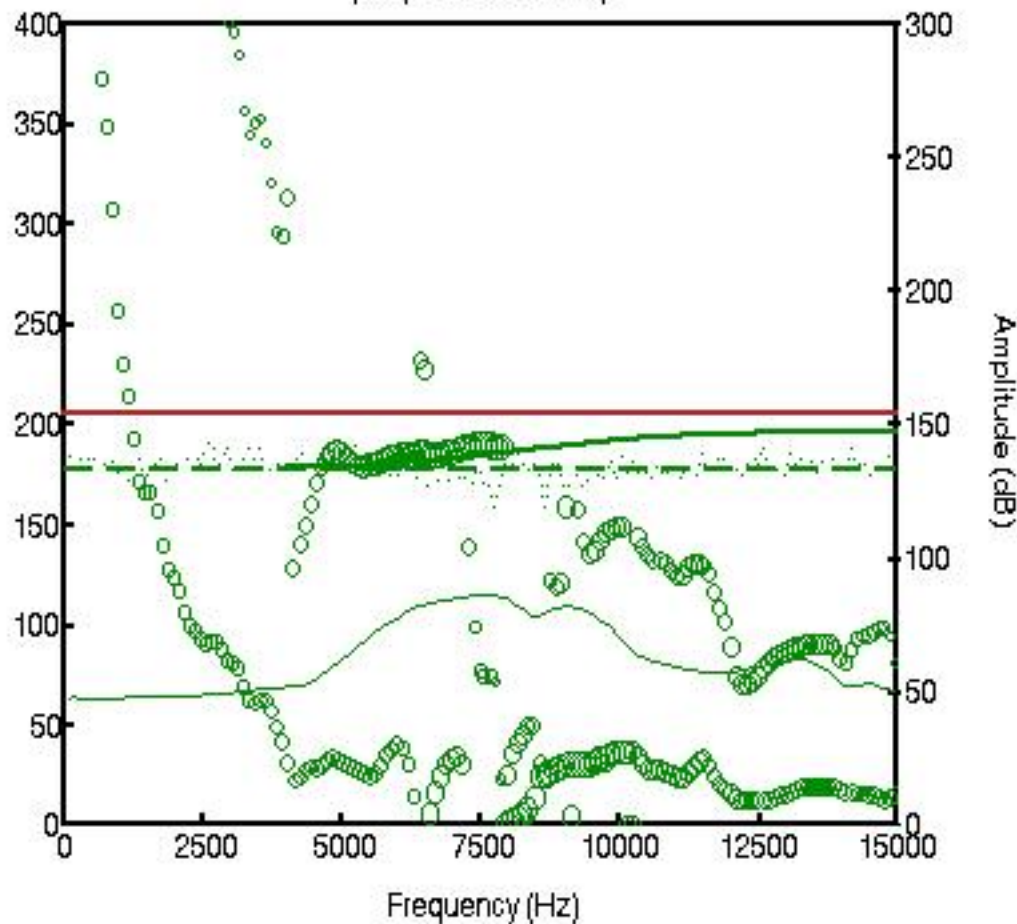

Slowness Dispersion Plot

(Depth = 7800.01 ft)

