



GEOFRAME
PROCESSED
INTERPRETATION

BestDT*
QC Plot – MP3

MH Leaky–P Processing

*A Mark of Schlumberger

Using the following logs: MP3

COMPANY: Chevron U.S.A., Inc.
WELL: JIP III WR 313 G
FIELD: Walker Ridge 313
County: Louisiana
State: U.S.A.
COUNTRY: U.S.A.
Date Logged: 21–Apr–2009 Date Processed: 24–Apr–2009
Well Location: NAD 27 15N, ft.
Elevations: KB: DF: 52ft GL: –6562ft
API Number: Job Number:

FOLD HERE The well name, location and borehole reference data were furnished by the customer.


All interpretations are opinions based on inferences from electrical or other measurements and we cannot, and do not guarantee the accuracy or correctness of any interpretation, and we shall not, except in the case of gross or willful negligence on our part, be liable or responsible for any loss, costs, damages or expenses incurred or sustained by anyone resulting from any interpretations made by any of our officers, agents or employees. These interpretations are also subject to Clause 4 of our General Terms and Conditions as set out in our current Price Schedule.

Field Recording:	Location: Upper Module	Software Version: 20C0–999	Engineer:
Office Recording:	ICS Center: Lafayette	Baseline:	Log Analyst: Bill Lawton


Mud and Borehole Measurements:

Rm @ Measured Temperature: 23ohm.m @ 57degF	BHT: 59degF	Bitsize: 6.75in
Rmf @ Measured Temperature: 23ohm.m @ 57degF	Type Fluid in Hole:	WBM
Rmc @ Measured Temperature: 23ohm.m @ 57degF	Mud Density: 10.5lbm/gal	


Remarks:

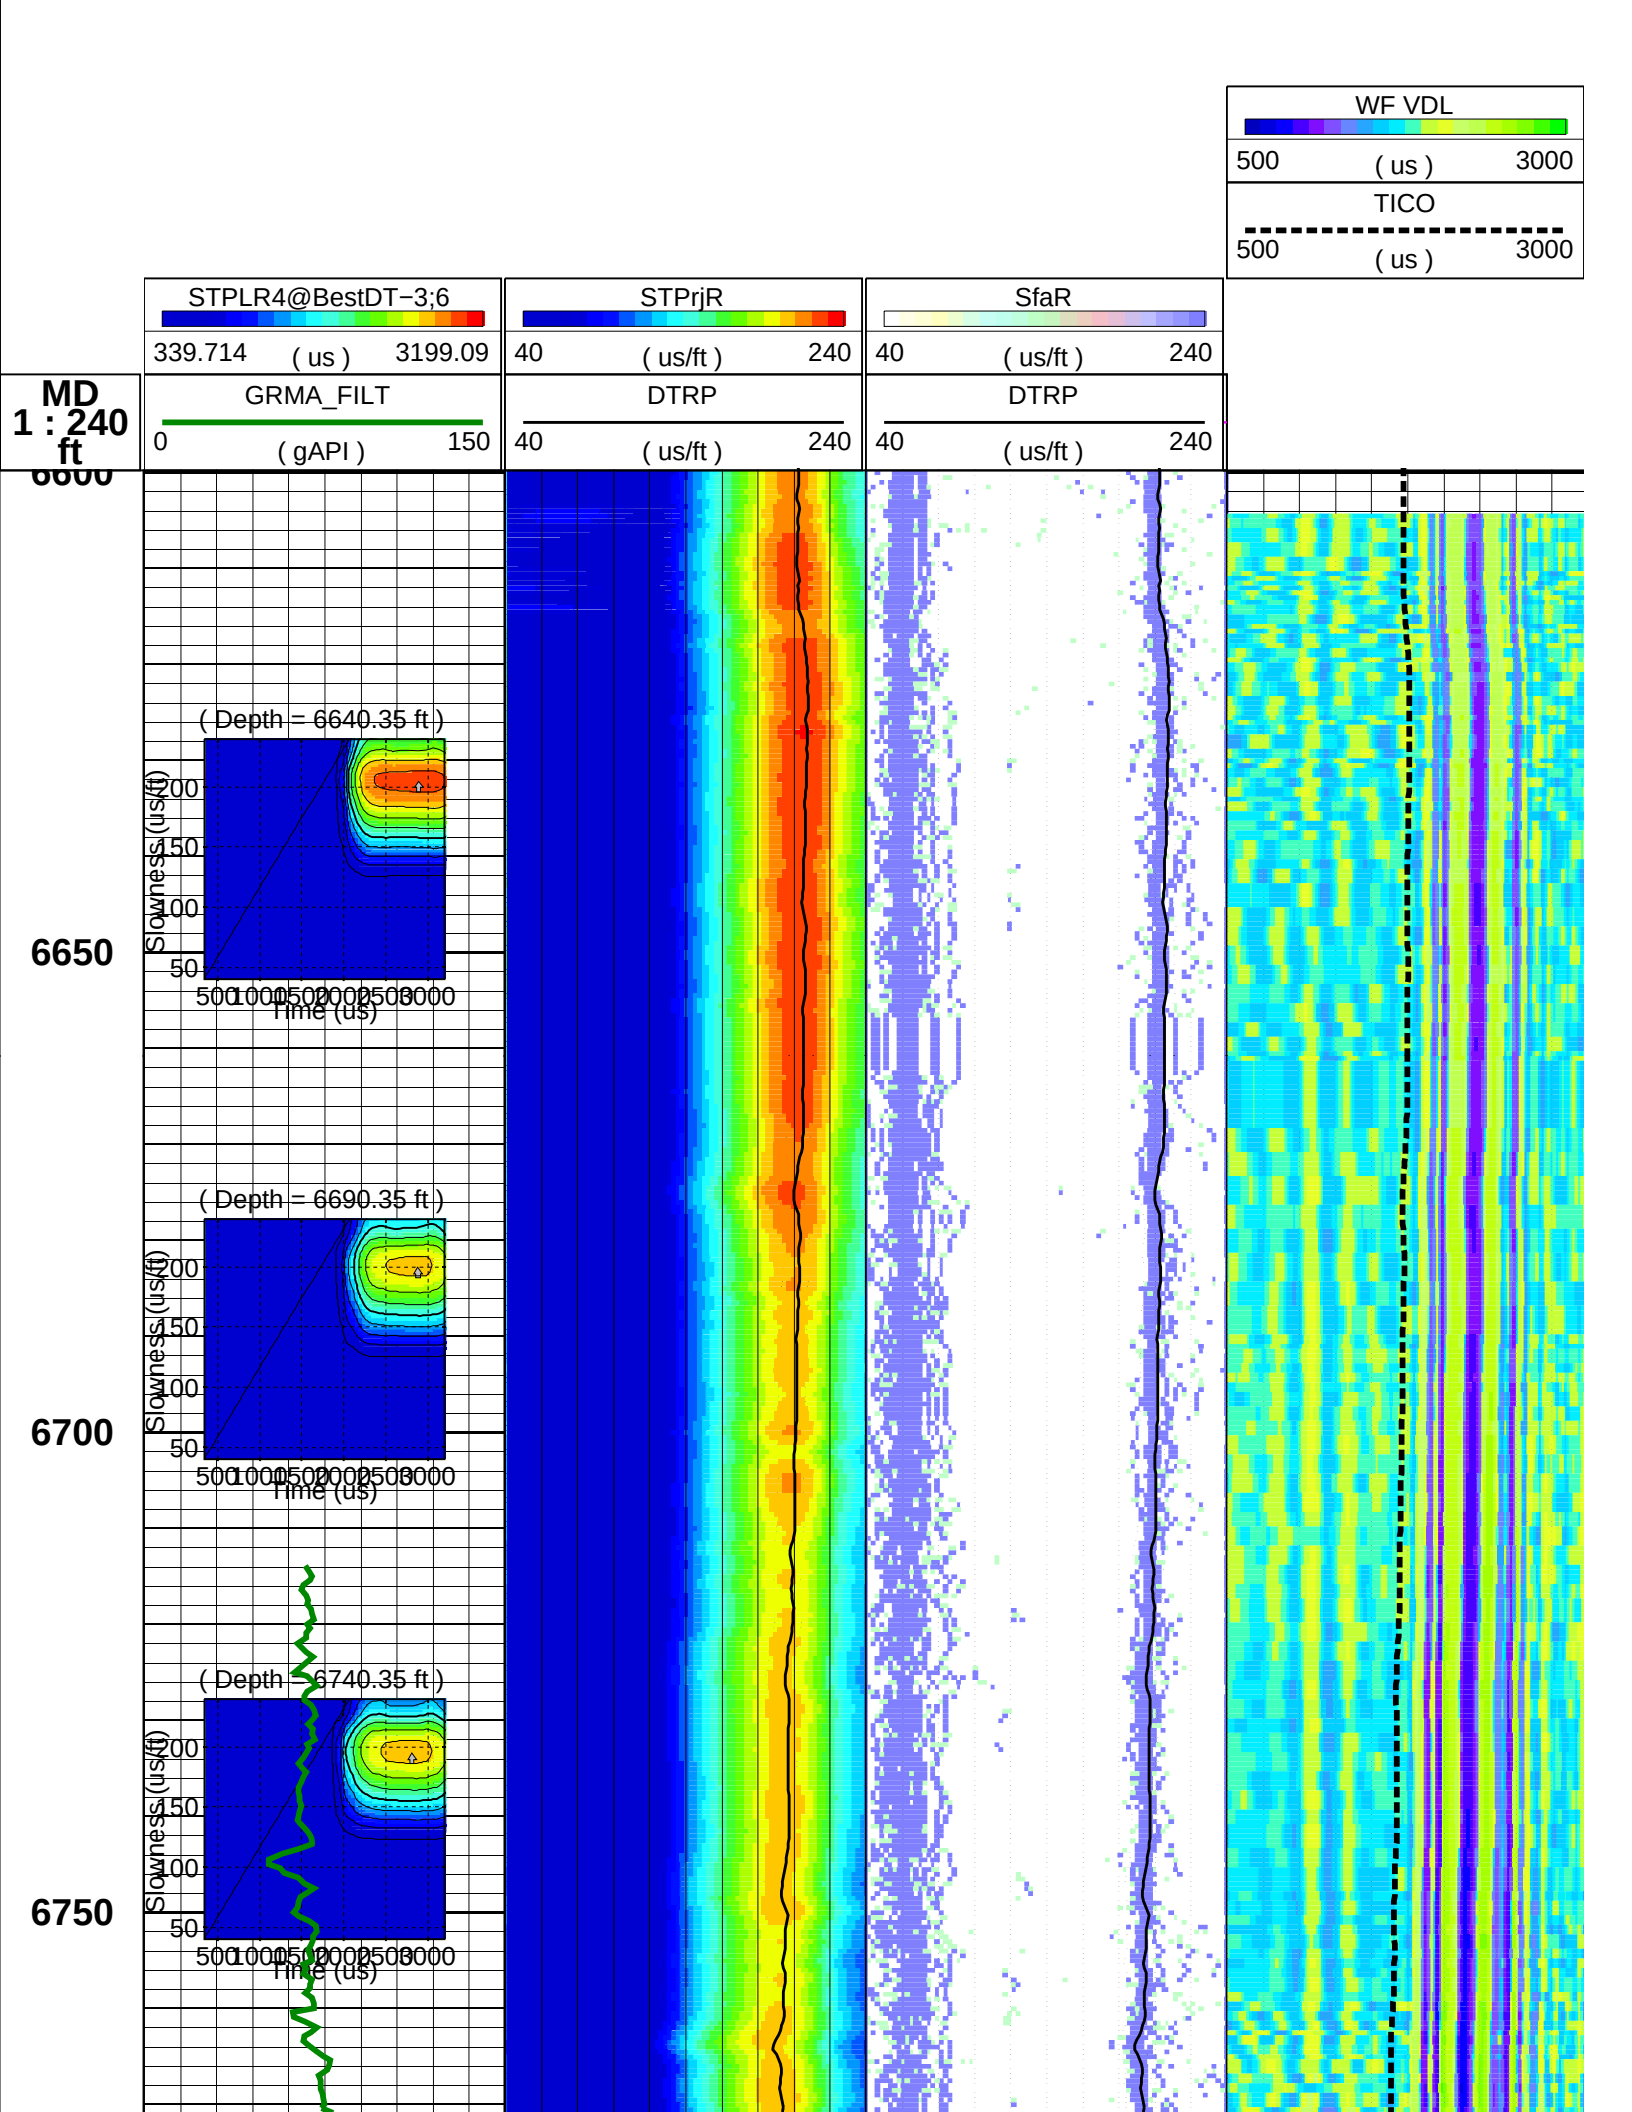


6800





6850




6900




6950




7000




7050




7100




7150




7200




7250




7300



7350




7400




(Depth = 7440.35 ft)




7450




7500





7550



7600



7650

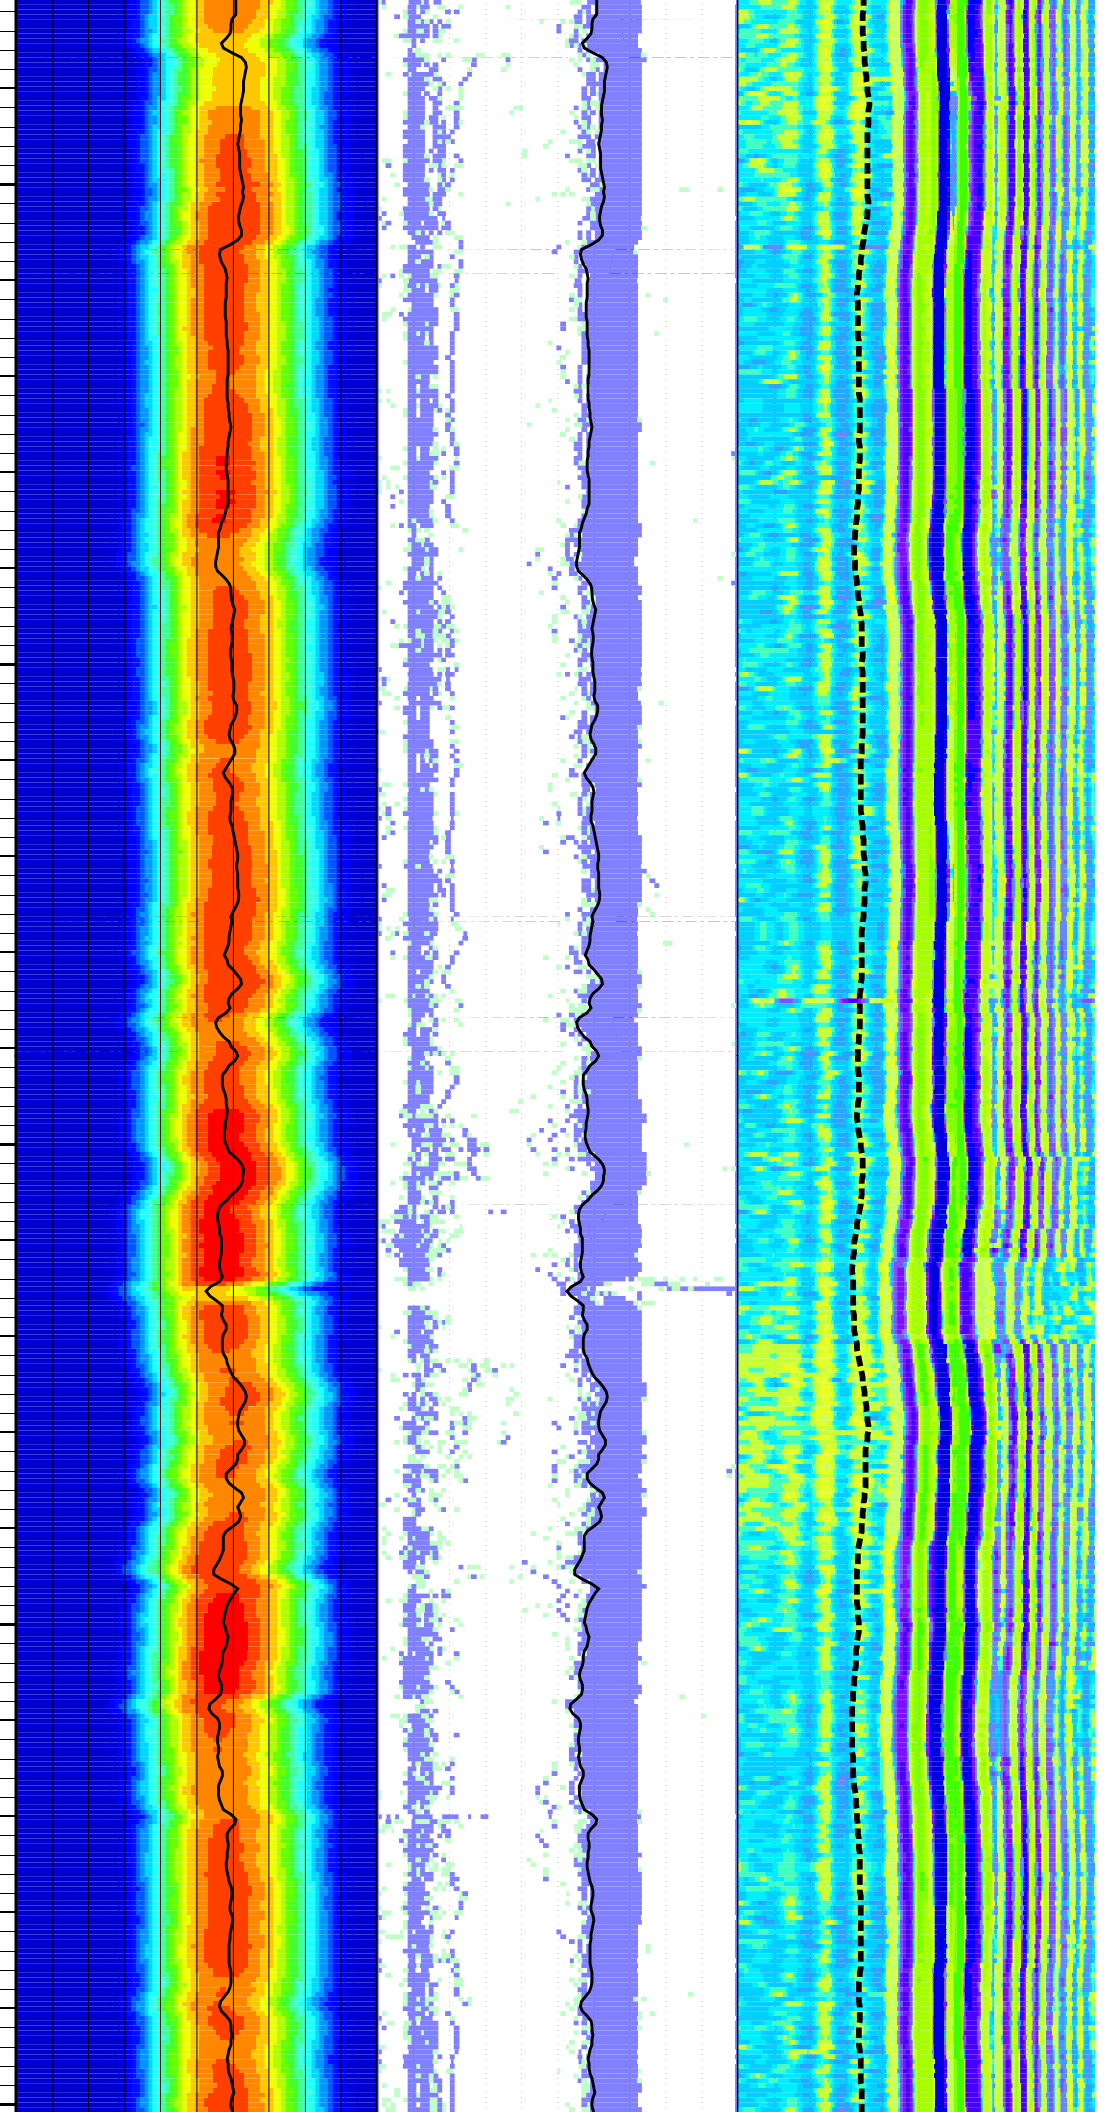


7700


7750

7800


7850

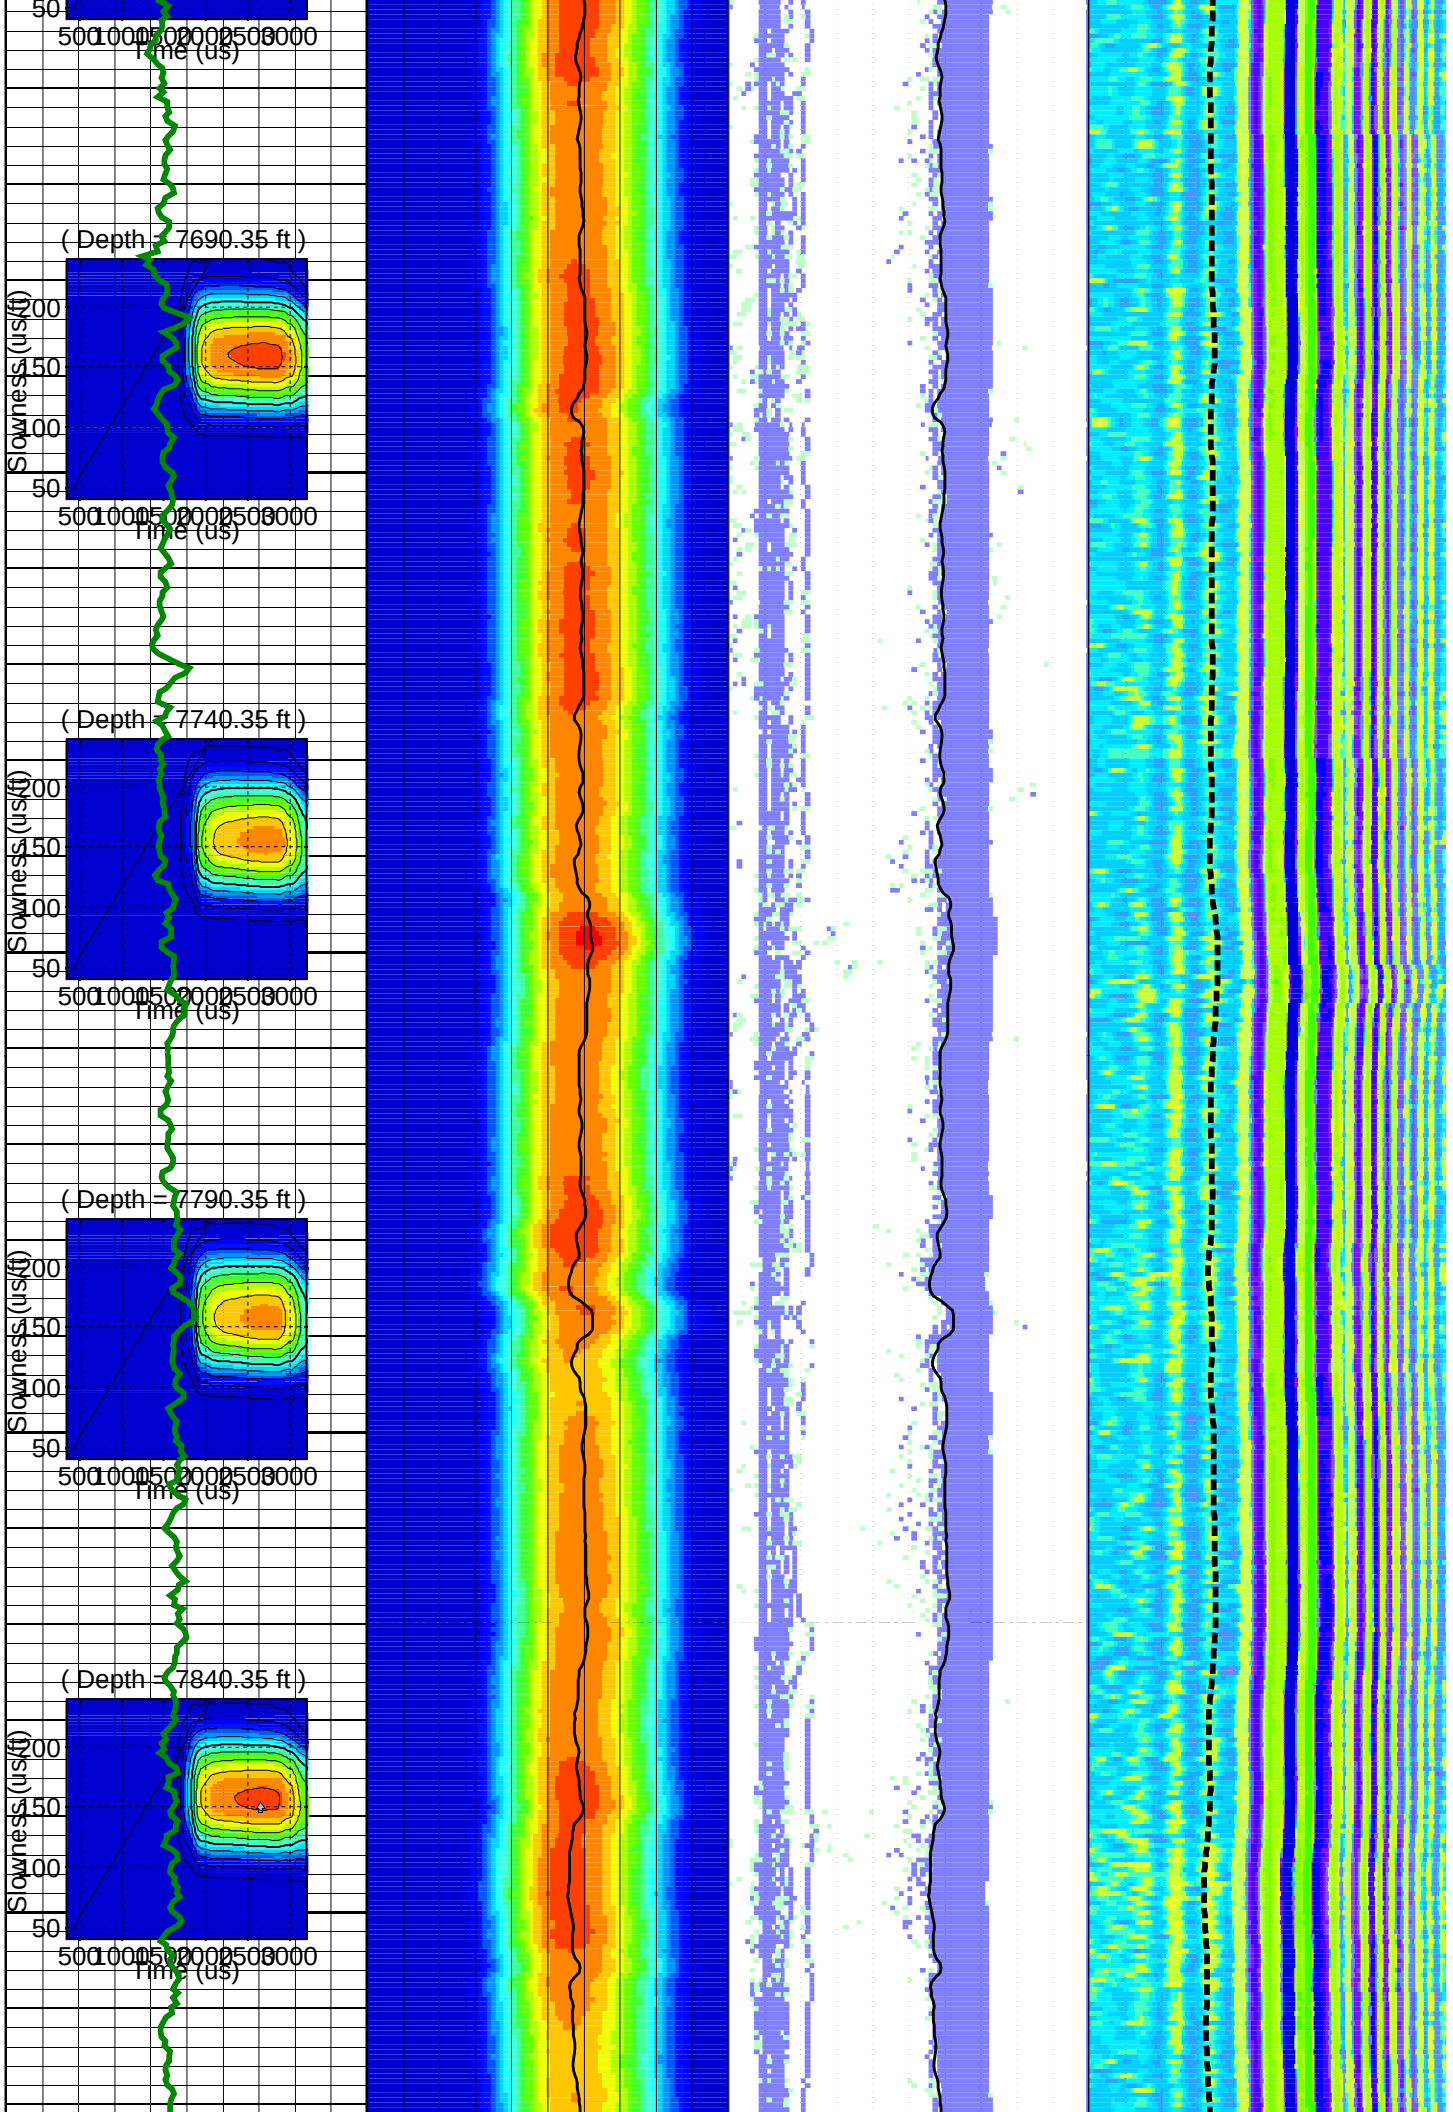


7900





7950




8000




8050




8100




8150




8200




8250




8300




8350




8400



8450




8500




(Depth = 8540.35 ft)


8550




8600





8650

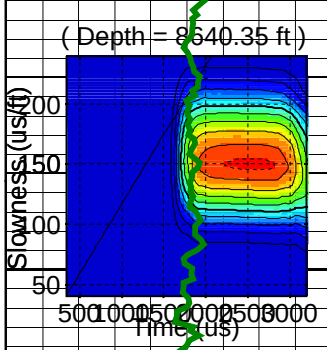

8700



8750

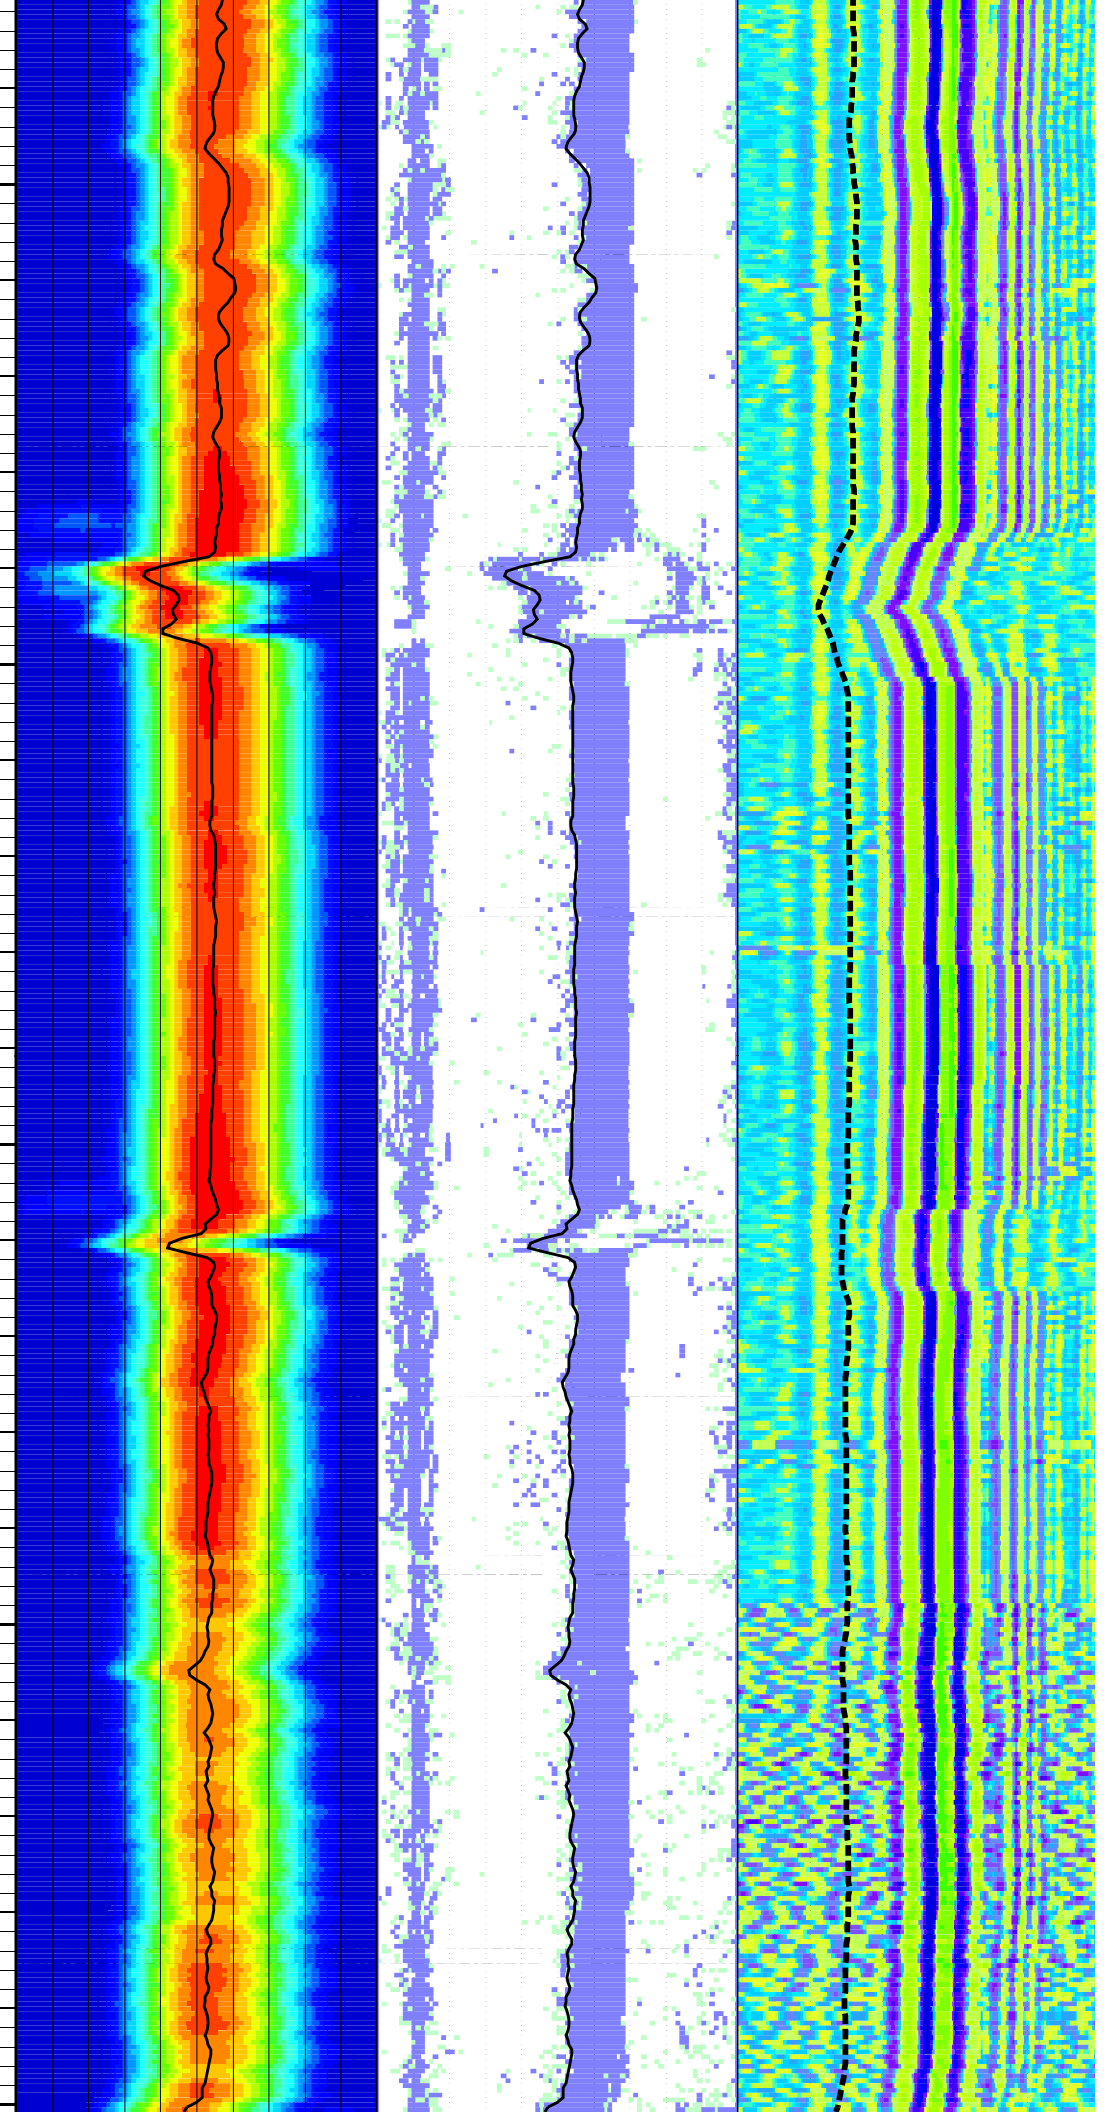



8800

8850

8900

8950

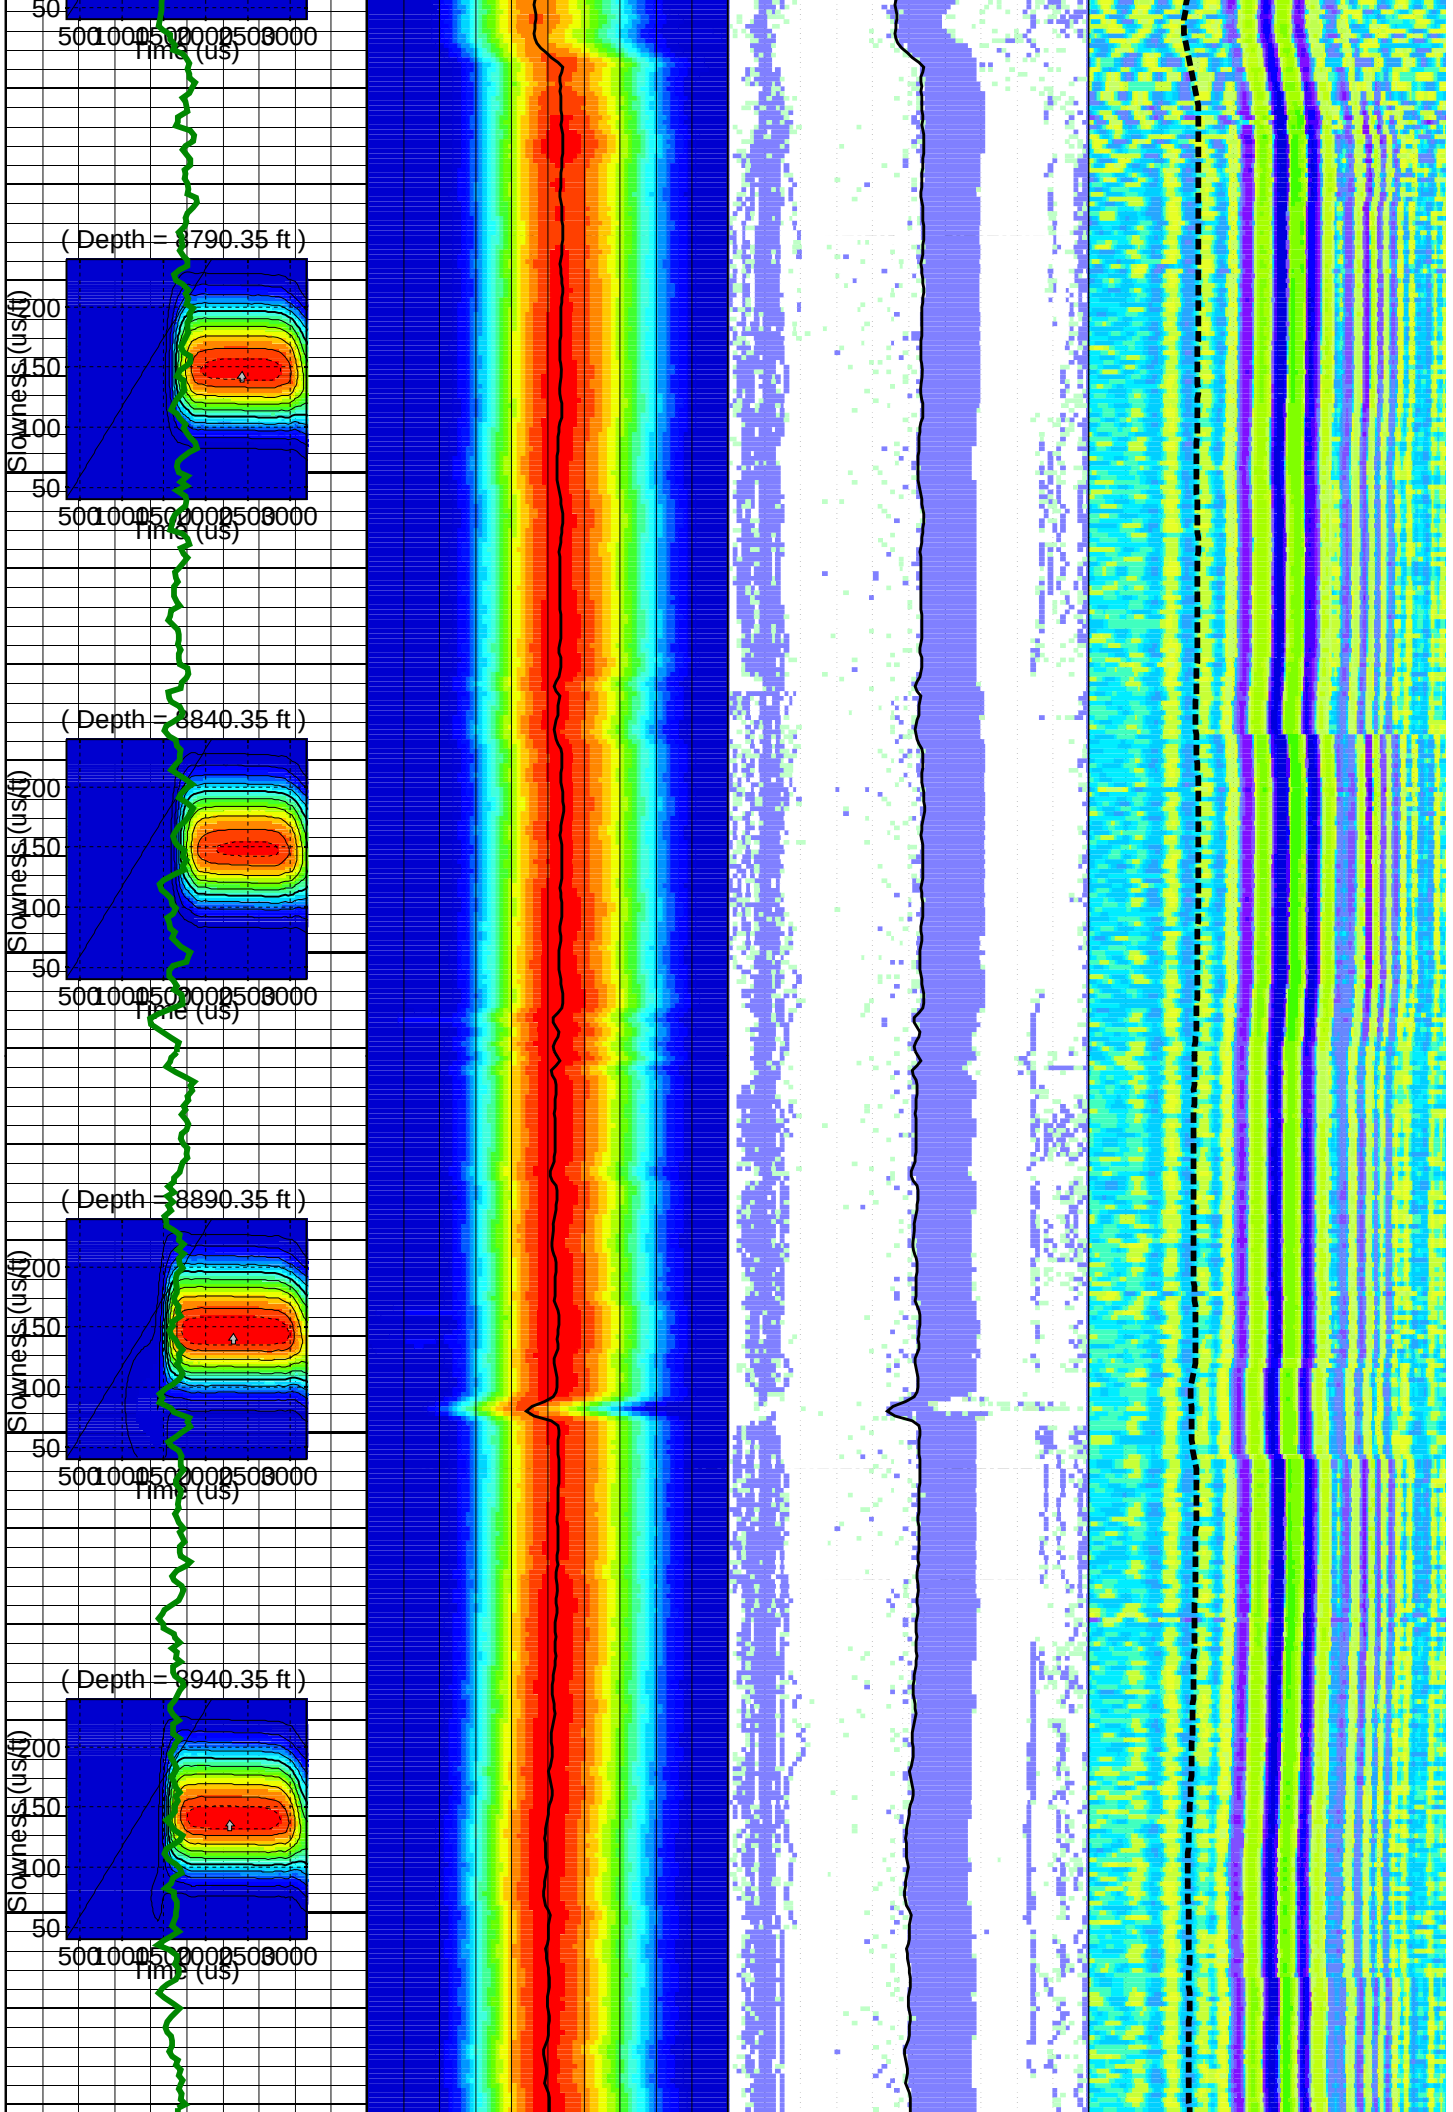

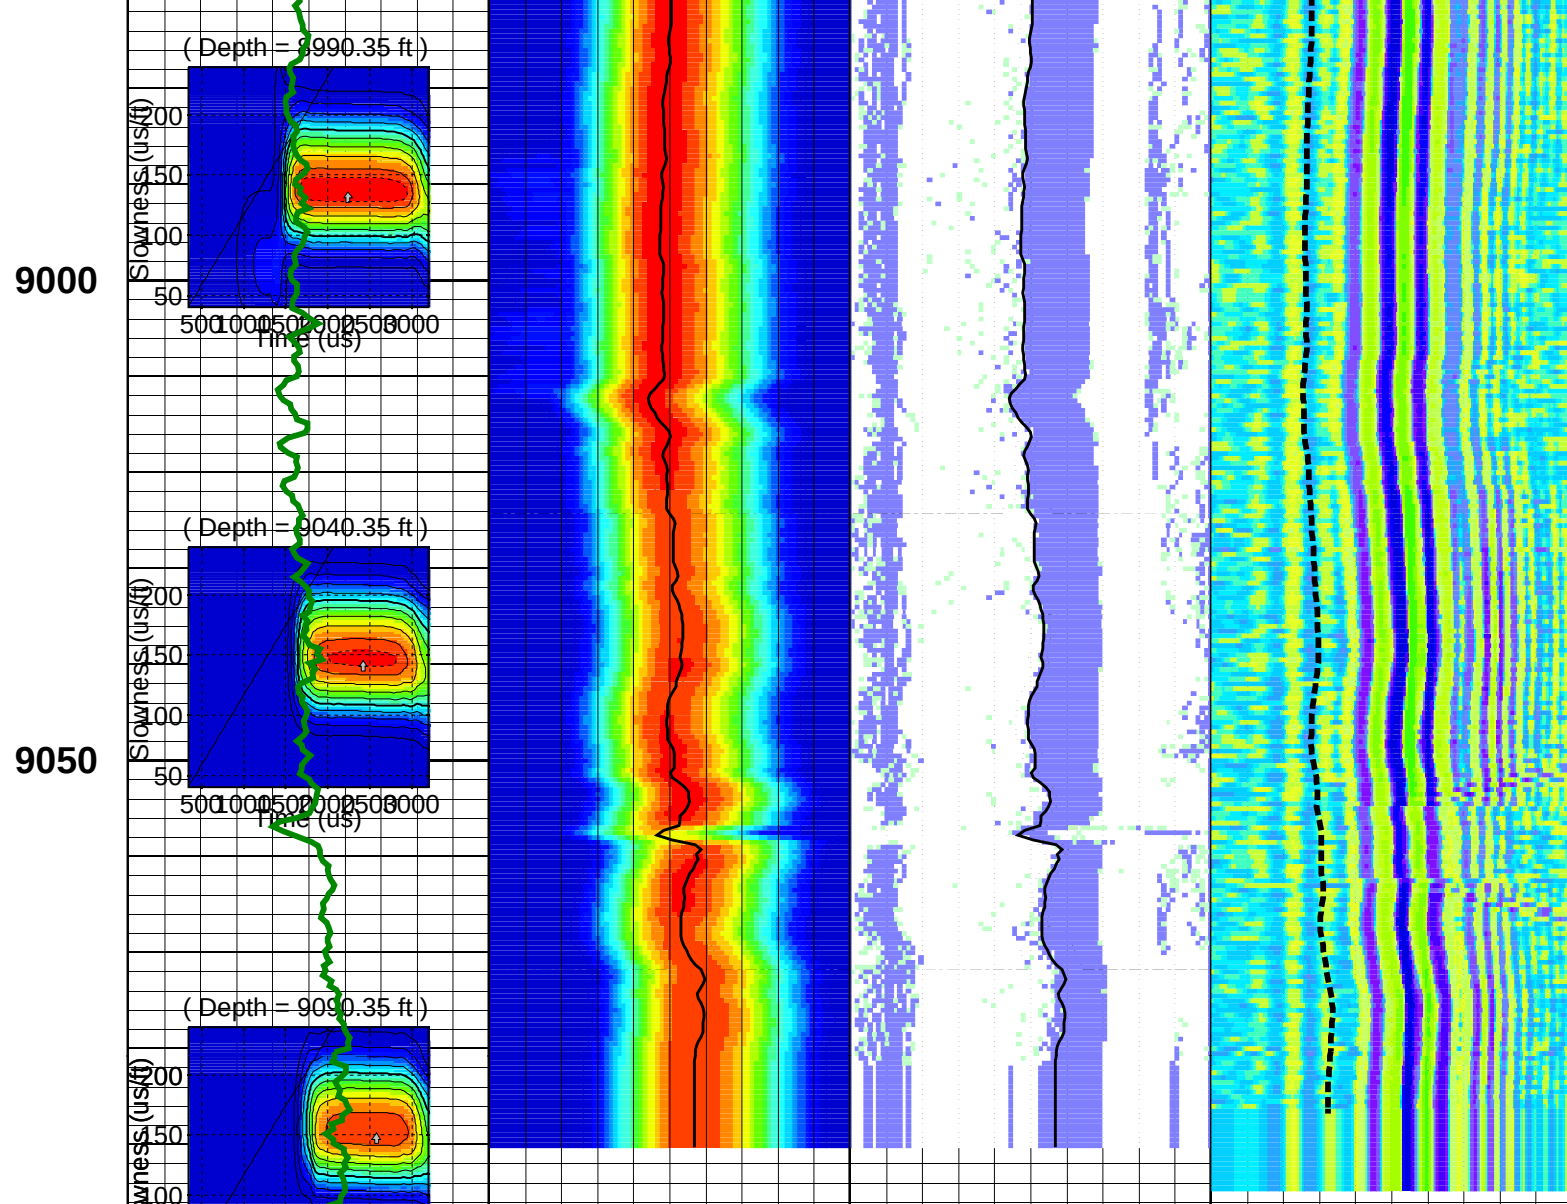


Customized Process: Start Depth (9090.35 ft), Stop Depth (6599.85 ft), Logging Mode (MP3 – MH2)
 Noise Cut Filtering(No), Casing Cut Filtering(No)
 WF_FLG(1 1 1 1 1 1 1 1 1 1 1), MUD_TYPE(WBM), STCAL(Multishot), NRSA(7)
 TRSPAC(7), RRSPAC(0 0.333333 0.666667 1 1.33333 1.66667 2 2.33333 2.66667 3 3.33333 3.66667)
 Mud Slowness (no input)
 Hole Diameter (no input)
 Zoning Guide (no input)
 Tracking Guide (no input)
 Bulk Density (RHOB@SONIC_RM__21Apr09_191851;1 .RECORDED-MODE (6580 – 10127 ft))

--- Zone Top Depth (0), Zone Name (Zone1) ---
 SFTY(Very Slow), BHS(OPEN), CSIZ(7), HDM(Fix*), HD(7*), DTMUD(205*), DFNM(Vp/Vs Based*), DFVPVS(4*)
 TWI(1012.7*), SLL(40.5078*), SUL(240.664*), SST(2.38281*), TLL(339.714), TUL(3199.09), TST(39.7135)
 SBW(1600*), SBO(550), SWD(20), TWD(900), SEM(0.45), FLENG(29*), FLOW(500*), FHIGH(3000*)
 TKO_MODEL_ORDER(3*), TKO_TOL(50) TKO_FLOW(0), TKO_FHIGH(12000)


MD 1 : 240 ft	GRMA_FILT	DTRP	DTRP	TICO 500 (us) 3000
	0 (gAPI) 150	40 (us/ft) 240	40 (us/ft) 240	
	STPLR4@BestDT-3;6	STPrjR	SfaR	
	339.714 (us) 3199.09	40 (us/ft) 240	40 (us/ft) 240	WF VDL

Slowness Dispersion Plot

(Depth = 7000.02 ft)

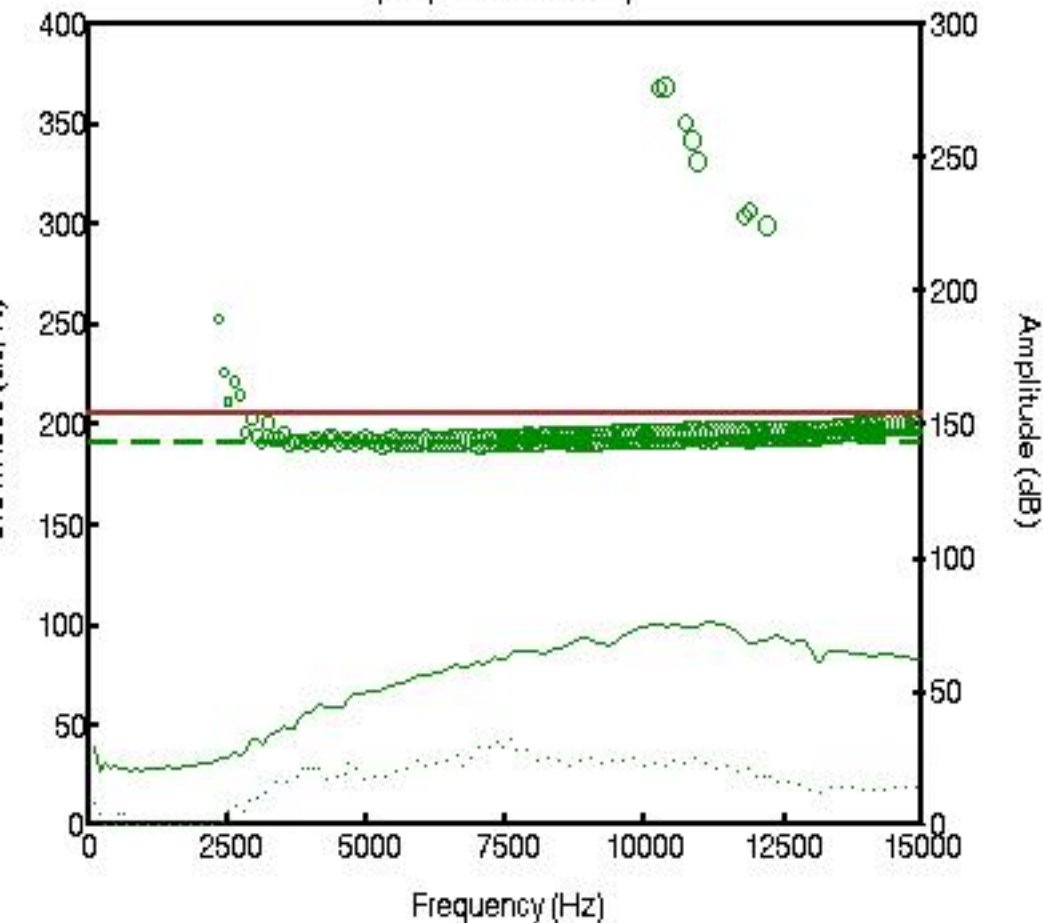


Slowness Dispersion Plot
(Depth= 7500.02 ft)

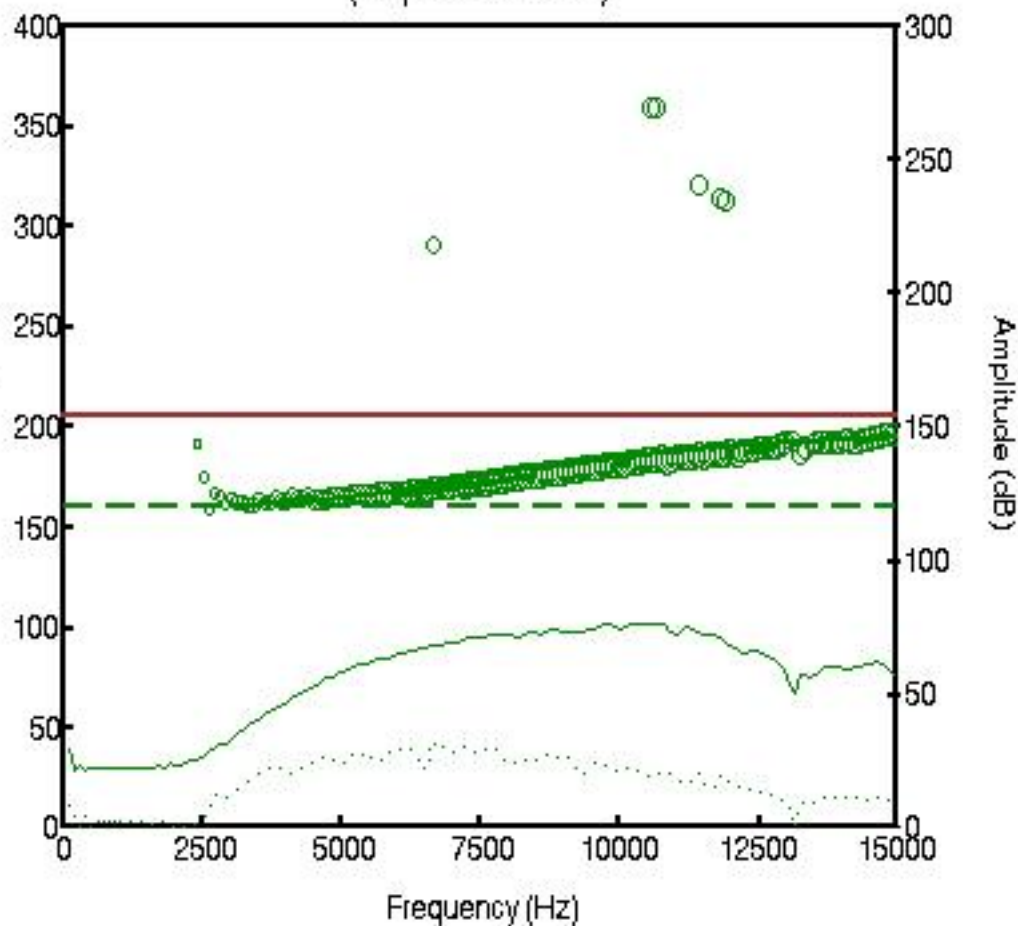


Slowness Dispersion Plot

(Depth= 8000.02 ft)

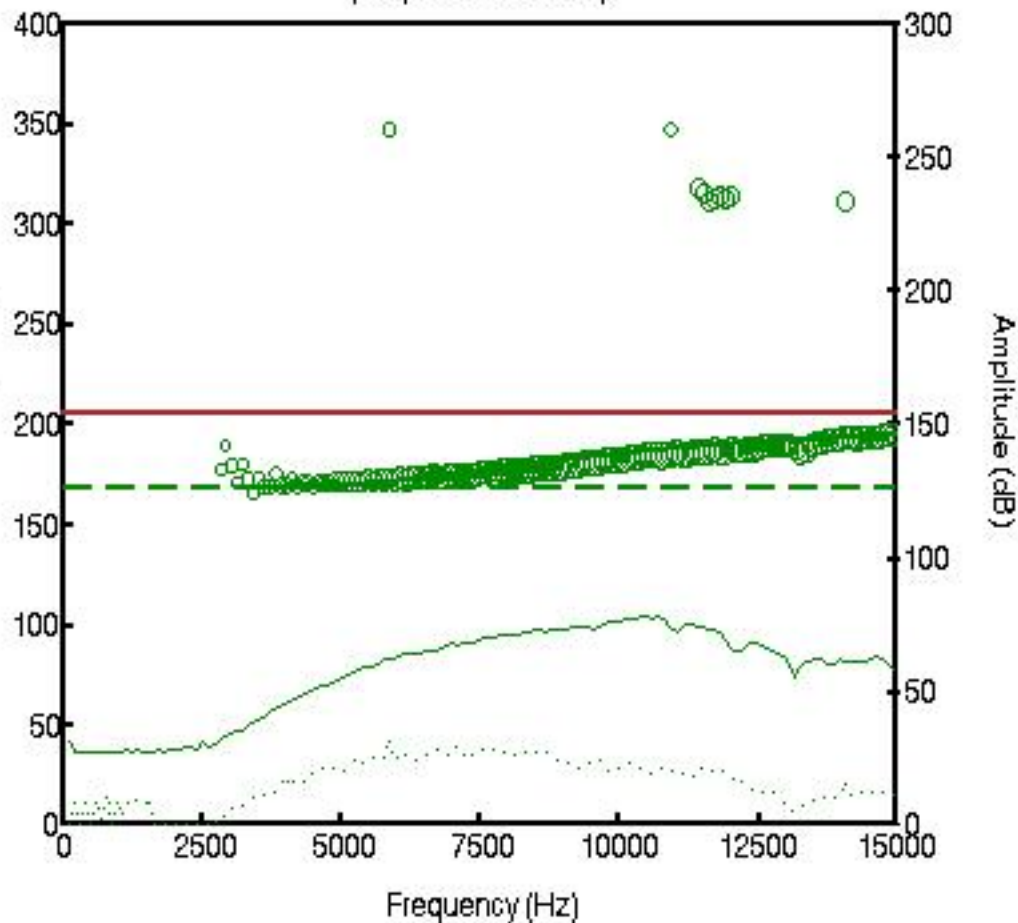

Slowness Dispersion Plot

(Depth = 8500.02 ft)

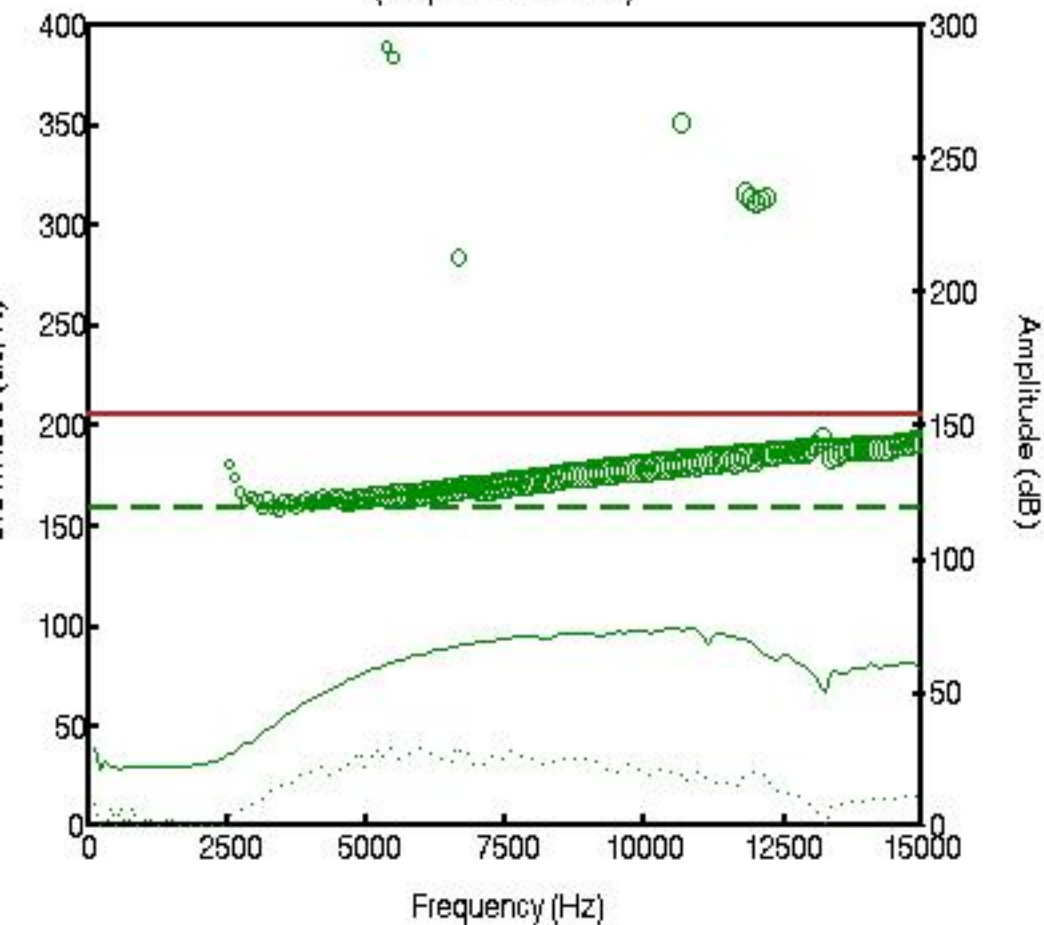

Slowness Dispersion Plot

(Depth= 8800.02 ft)

