



*Techlog Processed Interpretation

SonicScope QP Inversion DTSH

C0019F

6934 - 6995m (MD 1:500)

* A Mark of Schlumberger

COMPANY: JAMSTEC
WELL: C0019F
FIELD: C0019/C0026
PREFECTURE: Miyagi
COUNTRY: Japan

Date Processed: 19-Sep-2024 Date Logged: 15-Sep-2024

Job Number: JPJ-2024-006 Processed at: JPJ

Well Location: C0019/C0026

Latitude: 37° 56' 20.989" N Longitude: 143° 54' 47.844"

Elevation: KB: 0 DF: 28.50 m GL: -6898 m

FOLD HERE:


The well name, location and borehole reference data were furnished by the customer.

Any interpretation, research, analysis, data, results, estimates, or recommendation furnished with the services or otherwise communicated by Schlumberger to the customer at any time in connection with the services are opinions based on inferences from measurements, empirical relationships, and/or assumptions; which, inferences, empirical relationships and/or assumptions are not infallible and with respect to which professionals in the industry may differ. Accordingly, Schlumberger cannot and does not warrant the accuracy, correctness, or completeness of any such interpretation, research, analysis, data, results, estimates, or recommendation. The customer acknowledges that it is accepting the services "as is," that Schlumberger makes no representation or warranty, express or implied, of any kind or description in respect thereto, and that such services are delivered with the explicit understanding and agreement that any action taken based on the services received shall be at its own risk and responsibility, and no claim shall be made against Schlumberger as a consequence thereof.

Svc. Order #: Interpretation Center: Analyst: Lingdan Xia
Location: Techlog Vers: 2022.2.2

Remarks:

- This is 8.5in section drilling pass processed SonicScope shear slowness.
- Data presented is Recorded Mode data acquired while drilling.
- Permanent Datum: Mean Sea Level, Logging Measured from Drill Floor.
- The objective of SonicScope is to measure formation slowness.
- SonicScope Quadrupole Inversion processing is applied to process shear slowness
- Zoned processing parameter is applied (please see below table for more detail)
- Track #3: Processed compressional slowness and shear slowness
- Track #4: Coherence projection for quadrupole, 1D curve coherence and shear slowness from quadrupole inversion
- Track #5: SFA projection of quadrupole waveform and shear slowness from quadrupole inversion
- Track #6: Dispersion QC image. Inverted dispersion slowness is faster (Blue), slower (Red) and match well with data (White). Low and high frequency limits used in processing
- Track #7: Semblance spectrum image. Coherence values along the frequency axis, red color shows higher coherence value
- Track #8: VDL of input quadrupole waveform (filtered) and TISH for quadruple data

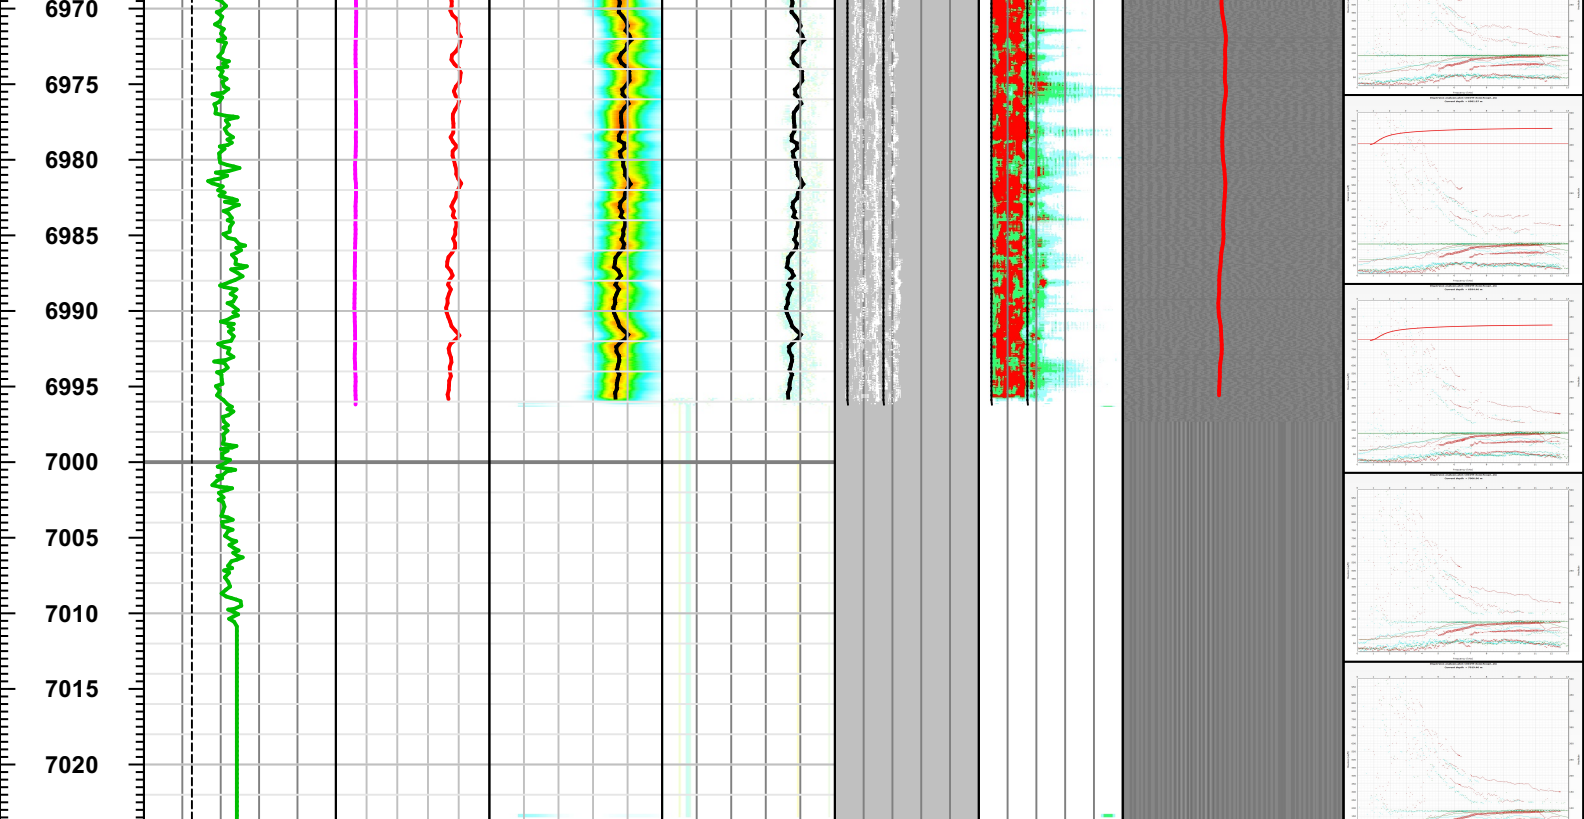

MD (m) 1:500			0.00 0.32 0.55 1.01		0.00 0.33 0.57 1.00		DISPERSION_QQ IMBALANCE_SPECTR			
			ST_Projection_SCOPE		SFA		DISP_QCI_QPINV		SBSPEC_QPINV	
							0 Hz 8000		0 Hz 8000	
							0 Hz 8000		0 Hz 8000	
GR		DTCO_ML_LP_R	COHPR_QPINV	SFA_QPINV	FRQMAX_QPINV	FRQMAX_QPINV	VDL		SWF_QPINV - R 6	
0 gAPI 100		60 us/ft 1000	60 us/ft 1000	60 us/ft 1000	0 Hz 8000	0 Hz 8000	-999.89 999.89		0 15300	
BS		DTSH_QPINV	DTSH_QPINV	DTSH_QPINV	FRQMIN_QPINV	FRQMIN_QPINV	TISH_QPINV_R6		DispersionAnalysis	
6 in 16		60 us/ft 1000	60 us/ft 1000	60 us/ft 1000	0 Hz 8000	0 Hz 8000	0 us 15300		0 43.8017	

COMPANY: JAMSTEC
WELL: C0019F
FIELD: C0019/C0026
PREFECTURE: Miyagi
COUNTRY: Japan



Date Logged: 15-Sep-2024
Date Processed: 19-Sep-2024
Surface Location: 37° 56' 20.989" N 143° 54' 47.844" E

Elevations: DF: 28.50 m GL: -6898 m
API Number: