


Drilling Mechanic Log											
ECO, DHAT, DHAP, Collar RPM											
8.5in Recorded Mode, MD 1:200											
											
Company:		JAMSTEC									
Well:		C0019F									
Field:		C0019/C0026									
Rig Name:		The "Deep Sea D/V CHIKYU"									
Prefecture:		Miyagi									
Country:		Japan									
Latitude:		37° 56' 20.99" N		UWID:		O.1042972.01					
Longitude:		143° 54' 47.844" E		Rig Name:		The "Deep Sea D/V CHIKYU"					
Block:				Rig Type:		Drill ship					
FL:		C0019/C0026									
FL1:		X: 756017.4m									
FL2:		Y: 4203068.8m									
Log Measured From: - Drill Floor: 28.50 m Permanent Datum: - Mean Sea Level  Ground Level: 6898.00 m											
Acquisition Dates:		14-Sep-2024 -- 15-Sep-2024		Other Services:							
Log Interval:		6926.40mBRT - 7019.00mBRT		Cont. DNI							
Index Types:		Measured Depth		MicroScope Resistivity Image							
Index Scales:		1:200		Delta-T							
Depth Source:		Driller's Depth									
Depth Sensor:		DES									
Print Type:		Final									
Spud Date:		13-Sep-2024									

Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SLB AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

1. Header
2. Disclaimer
3. Contents
4. Well Sketch
5. Borehole Size/Casing/Tubing Record
6. Operational Run Summary
7. Borehole Fluids
8. Remarks and Equipment Summary
9. Survey Record
10. C0019F_Run1

10.1 Integration Summary

10.2 Software Version

10.3 Composite Summary

10.4 Log (DML_Depth_RM MD200)

10.5 Parameter Listing
11. Calibration Report
12. Tail

Well Sketch

Driller Depth
6923.000 m





Borehole Size/Casing Record

Bit						
Bit Size (in)	8.5					
Top Driller (m)	6923					
Bottom Driller (m)	7024					

Operational Run Summary

Parameter (unit)	C0019F_Run1					
Date Log Started	13-Sep-2024					
Time Log Started	22:50:14					
Date Log Finished	15-Sep-2024					
Time Log Finished	22:31:16					
Bit Size (in)	8.500					
Bit Start Depth (m)	6926.400					
Bit Stop Depth (m)	7024.000					
Top Log Interval (m)	6926.400					
Bottom Log Interval (m)	7019.009					
Max Hole Deviation (deg)	9.02					
Azimuth of Max Deviation (deg)	245.08					
Logging Unit Number	OLU-MAB 20011					
Logging Unit Location	Zone2					
Recorded By	W.Song/Q. Ruan/ N. Sato/K. Kawaguchi					
Witnessed By	A. Wspanialy					
Service Order Number	O.1042972.01					

Borehole Fluids


Parameter(unit)	C0019F_Run1					
Fluid Type	Water					
Fluid Name	Sea water					
Max Recorded Temperatures (degC)	2					
Source of Sample	Active Tank					
Salinity (ppm)	36665					
Density (g/cm3)	1.03					


Funnel Viscosity (s)						
Fluid Loss (cm3)						
PH	7					
Source RMF	Calculated					
RMC	Calculated					
RM @ Meas Temp (ohm.m@degC)	0.08 @ 2					
RMF @ Meas Temp (ohm.m@degC)	0.06 @ 2					
RMC @ Meas Temp (ohm.m@degC)	0.12 @ 2					
RM @ BHT (ohm.m@degC)	0.08 @ 2					
RMF @ BHT (ohm.m@degC)	0.06 @ 2					
RMC @ BHT (ohm.m@degC)	0.12 @ 2					
Total Solid (%)						
High Gravity Solids (%)						

Remarks and Equipment Summary

C0019F_Run1: Toolstring				C0019F_Run1: Remarks	
Equip name SONICSCOPE6:H3340 Length 32.42 MP name SonicScope Offset XOS6:NCN2161+5 MP6DC:H3340 Upper Stabilizer:BT-6300-01 Lower Stabilizer:BT-6092-01 Upper Extender:NA MP6UC:8029 MP6LC:8029 Lower Extender:07-047  TELE675:N003128 22.09 TeleScope MSSU675:PCT09202028 Upper Extender:SN21 MDC675:N003128 MMA:7142 MDI:5040 PMGD:1982 PMEA:4189 MTA:3674-T MTK675-0017	All data presented is from tool's memory and acquired while drilling.				
	Depth reference is driller's depth.				
	Drilling fluid is sea water.				
	TeleScope TAPWD ECD corrected with riserless flagging.				
	Record rate for ECO, DHAT, DHAP is 30s.				
	Drilling log interval: 6926.40mBRT - 7009.18mBRT.				
	Drilling interval: 6926.40mBRT -				
	Total pumping hours: 9.91hrs. Total drilling hours: 5.83hrs.				
	Reason for POOH: TeleScope failure.				

APWD:5006
MSSD675:OSSTJ2404-33
Lower Extender, Long
:CREPC-12

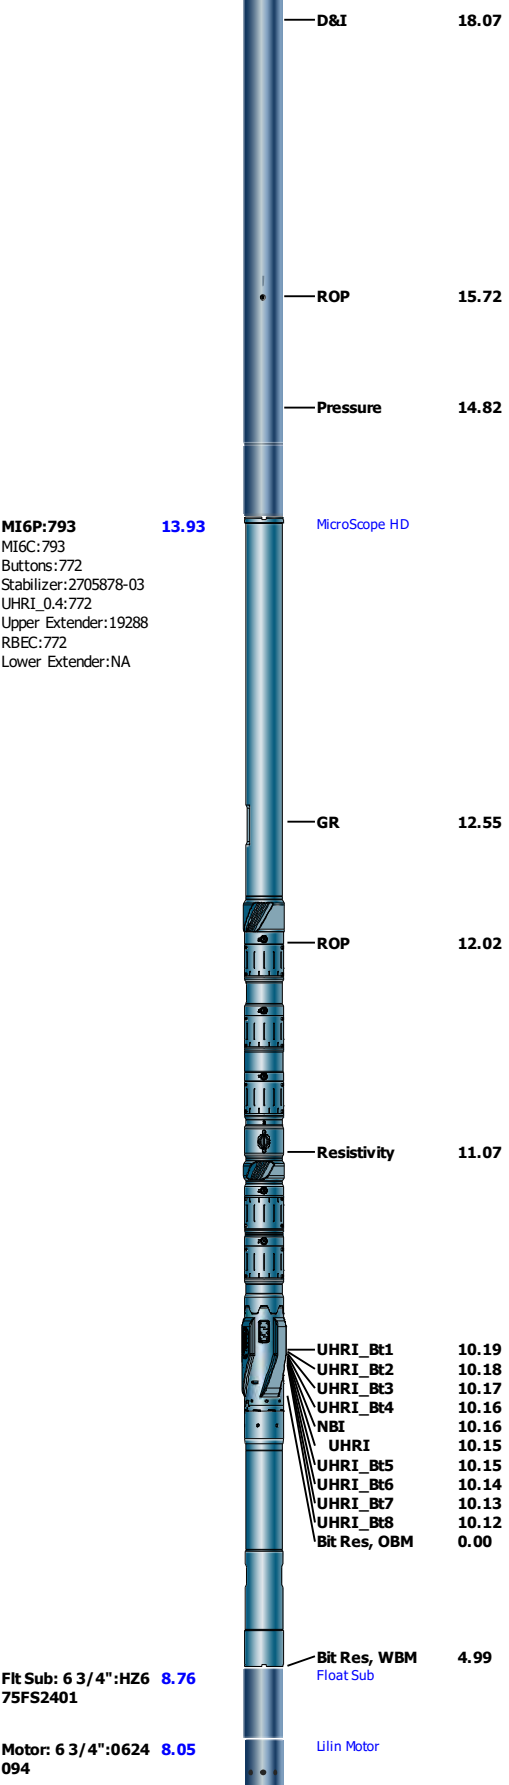

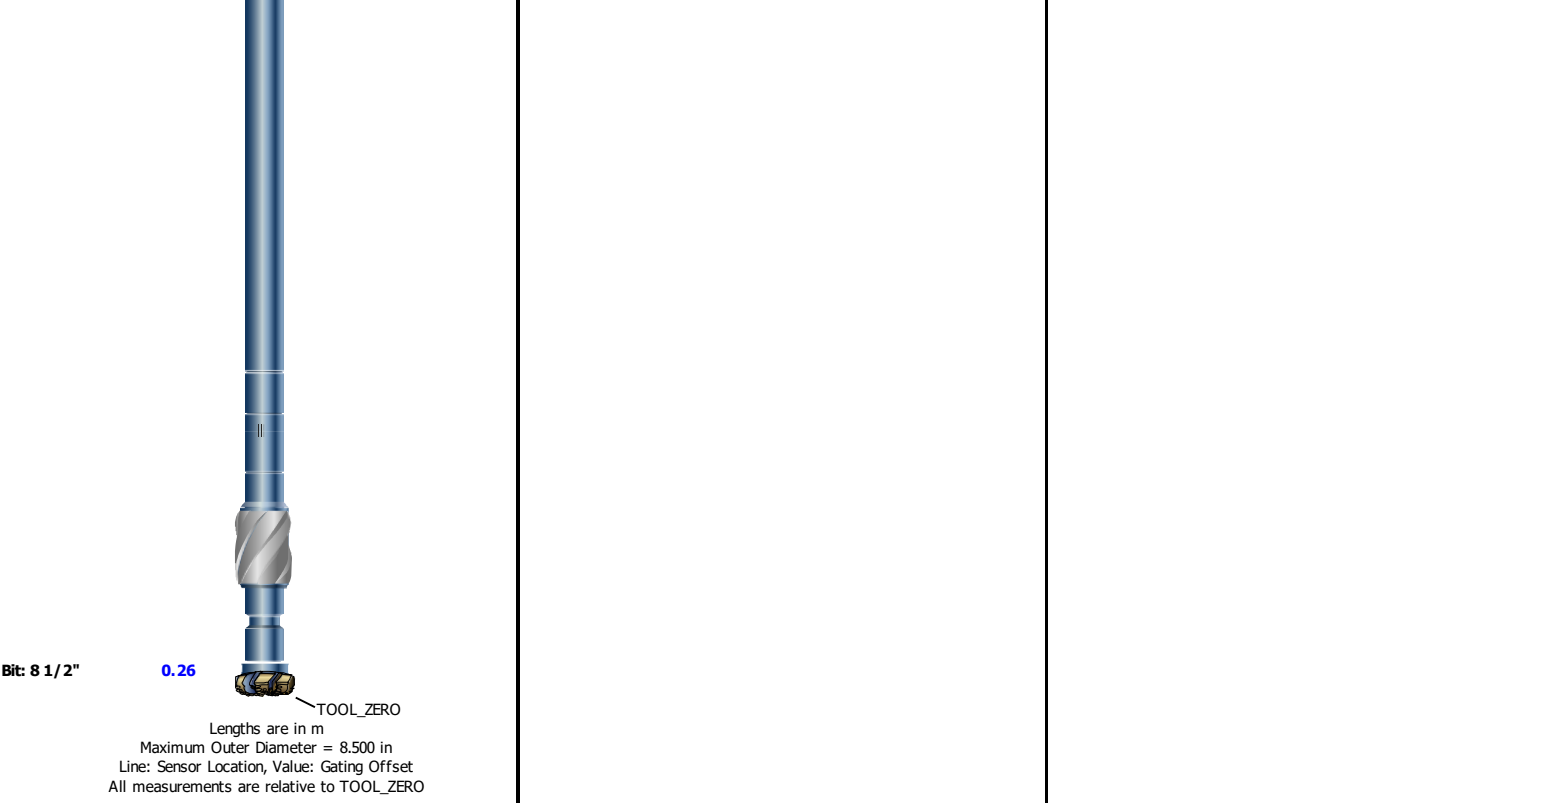

Survey Record

Survey Calculation			
Method :	Minimum Radius of Curvature	DLS Method :	Lubinski
North Reference :	Grid North	Total Correction Formula :	Magnetic Dec - Grid Convergence
Grid Convergence :	1.79 deg		

Rig Location					
Latitude :		37° 56' 20.99" N		Longitude :	
				143° 54' 47.844" E	
Tie In Point					
Measured Depth:	0.000 m	Inclination:	0.00 deg	Azimuth:	0.00 deg
True Vertical Depth:	0.000 m	North Displacement:	0.000 m	East Displacement:	0.000 m
N/-S VSec Origin:	0.000 m	E/-W VSec Origin:	0.000 m	Vertical Section Azimuth:	0.00 deg

D&I Inits Computed and Values Used - C0019F_Run1			
Geomagnetic Model :	HDGM 2024	Geomagnetic Date :	15-Jul-2024
Computed Location B :	46962.57 nT +/- 300.00nT	Used Location B :	46962.57 nT +/- 300.00nT
Computed Location G :	999.32 mgn +/- 2.50mgn	Used Location G :	999.16 mgn +/- 2.50mgn
Computed Magnetic Dip :	51.53 deg +/- 0.45deg	Used Magnetic Dip :	51.53 deg +/- 0.45deg
Computed Magnetic Dec :	-7.75 deg	Used Magnetic Dec :	-7.75 deg
Computed Total Correction :	-9.54 deg	Used Total Correction :	-9.54 deg


D&I Inits Computed and Values Used - Run 2			
Geomagnetic Model :	HDGM 2024	Geomagnetic Date :	15-Jul-2024
Computed Location B :	46962.57 nT +/- 300.00nT	Used Location B :	46962.57 nT +/- 300.00nT
Computed Location G :	999.32 mgn +/- 2.50mgn	Used Location G :	999.16 mgn +/- 2.50mgn
Computed Magnetic Dip :	51.53 deg +/- 0.45deg	Used Magnetic Dip :	51.53 deg +/- 0.45deg
Computed Magnetic Dec :	-7.75 deg	Used Magnetic Dec :	-7.75 deg
Computed Total Correction :	-9.54 deg	Used Total Correction :	-9.54 deg


Survey Quality Index			
2 : Long Survey failed mag criteria	9 : Manual	28 : Tie-In Point	


Survey Correction Index			
0 : No correction			

Survey Description Index			
0 : Not Flagged Survey	7 : Projection to Bit		

Seq	MD (m)	Incl (deg)	Azim (deg)	Course (m)	TVD (m)	V Sec (m)	N/ -S (m)	E/ -W (m)	Closure (m)	at Azim (deg)	DLS deg/30m	Tool Type	QI	CI	DI
1	0.000	0.00	0.00	- - - -	0.000	0.000	0.000	0.000	0.000	90.00	0.00	TIP	28	0	0
2	6926.50	0.00	0.00	6926.50	6926.50	0.000	0.000	0.000	0.000	90.00	0.00	Other	9	0	0

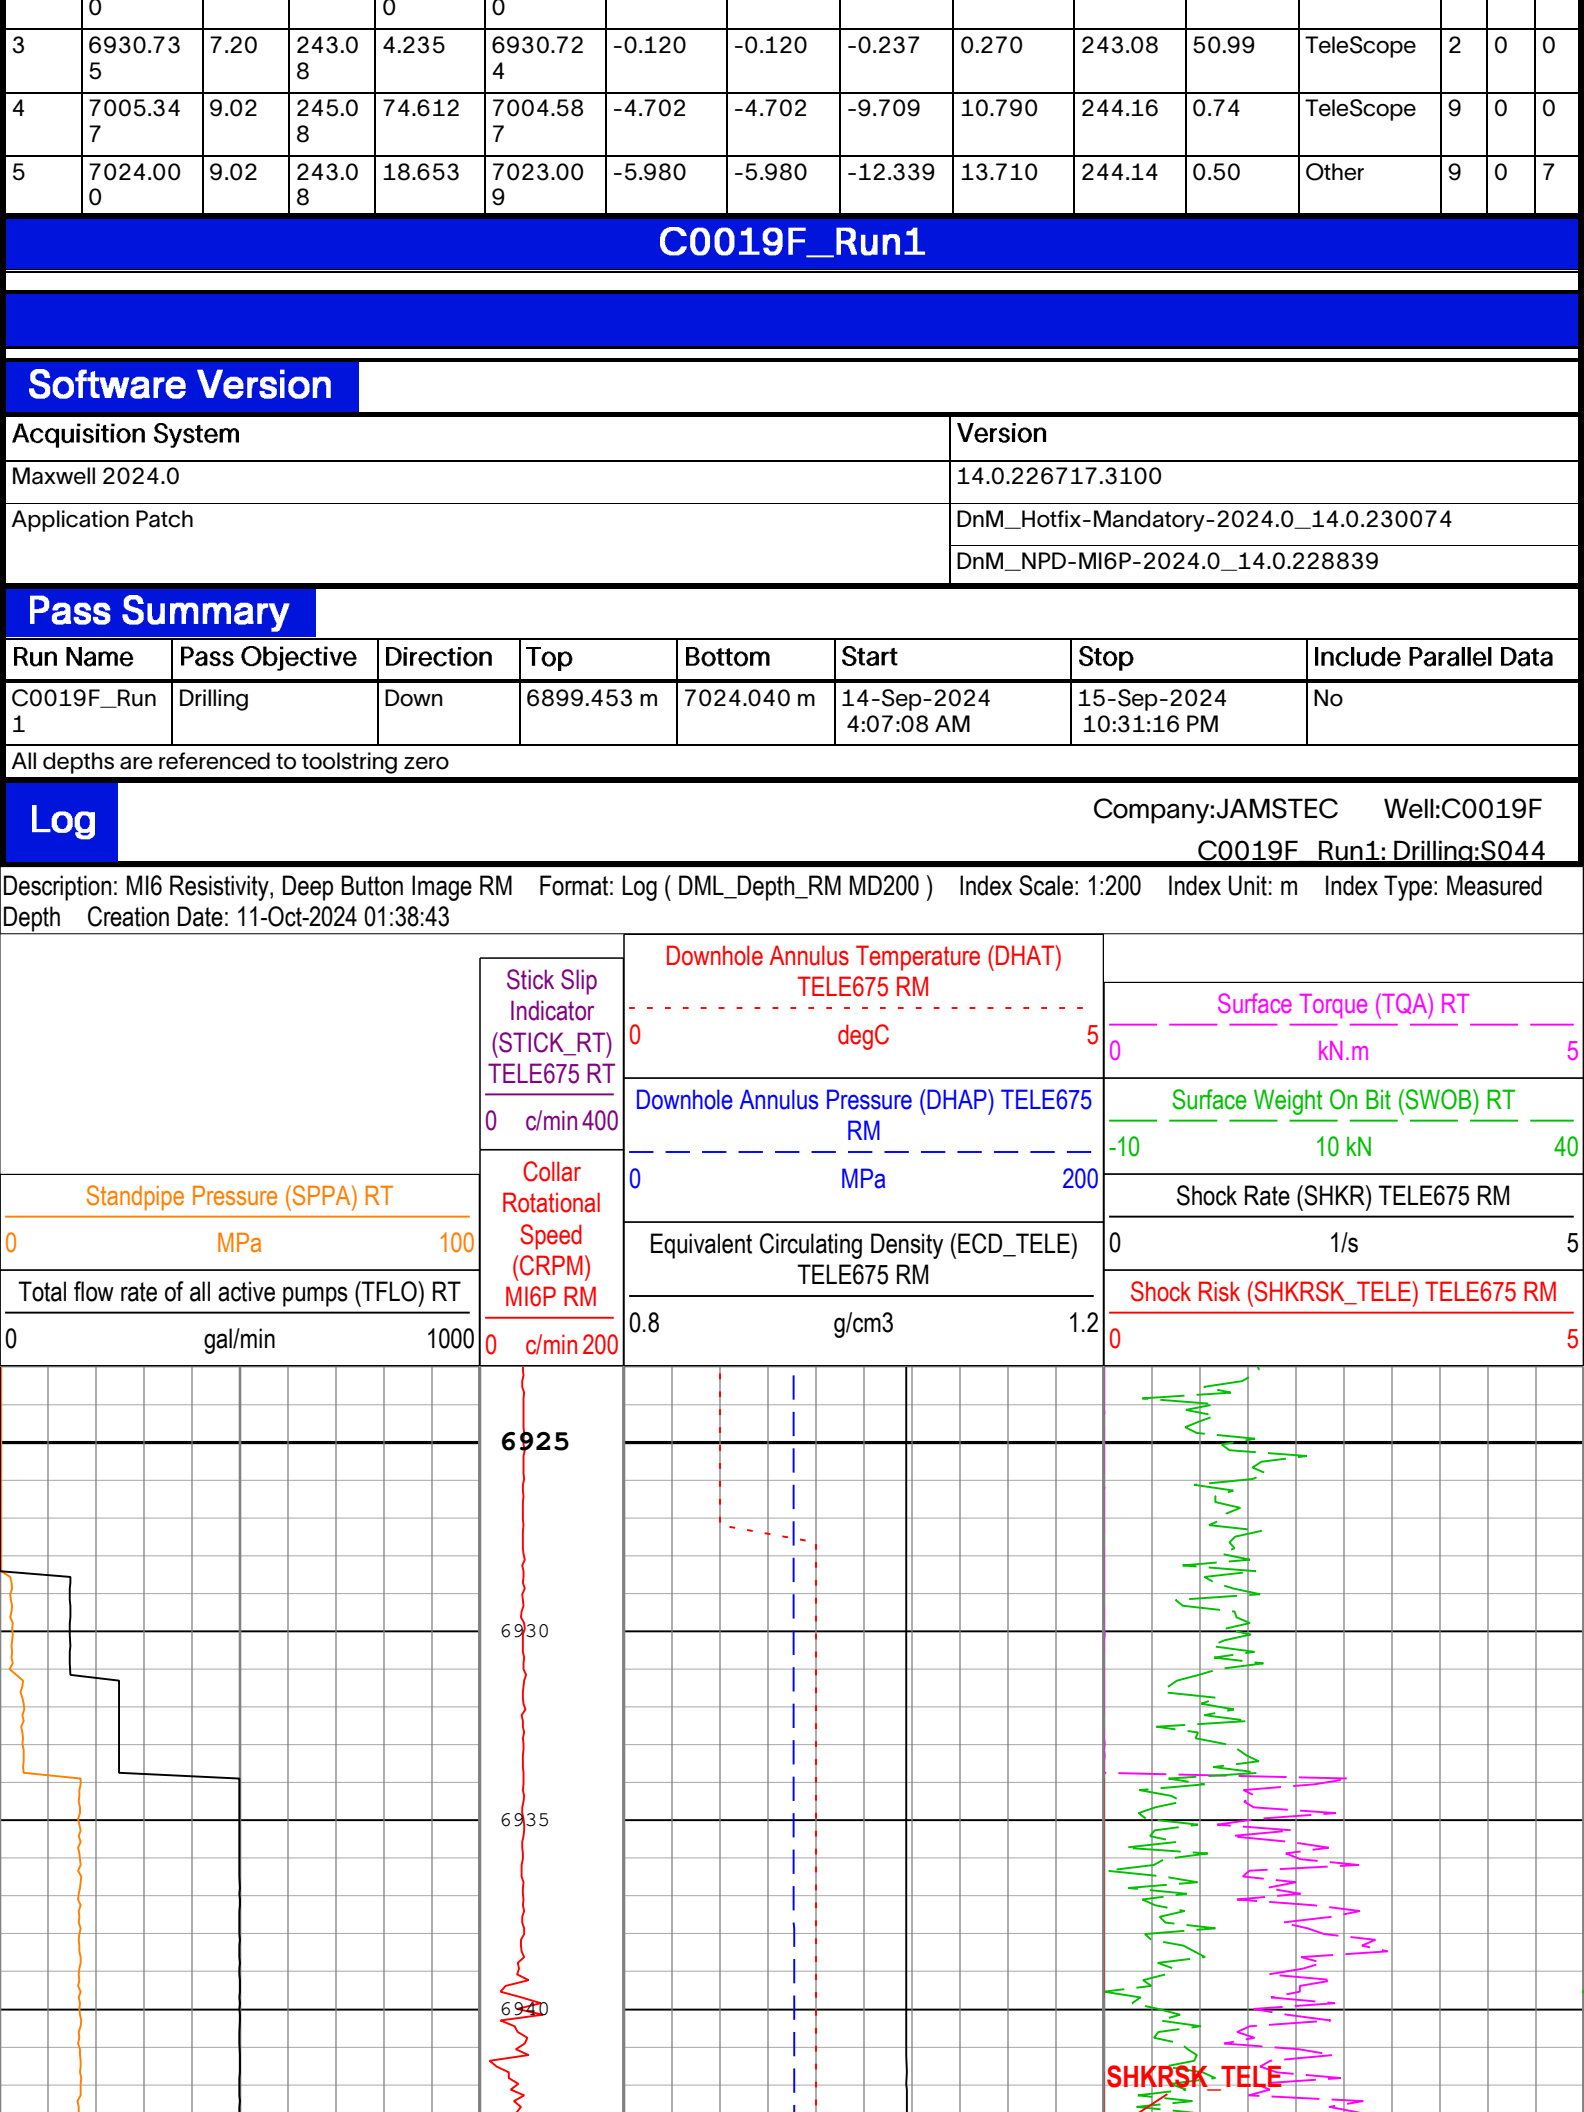

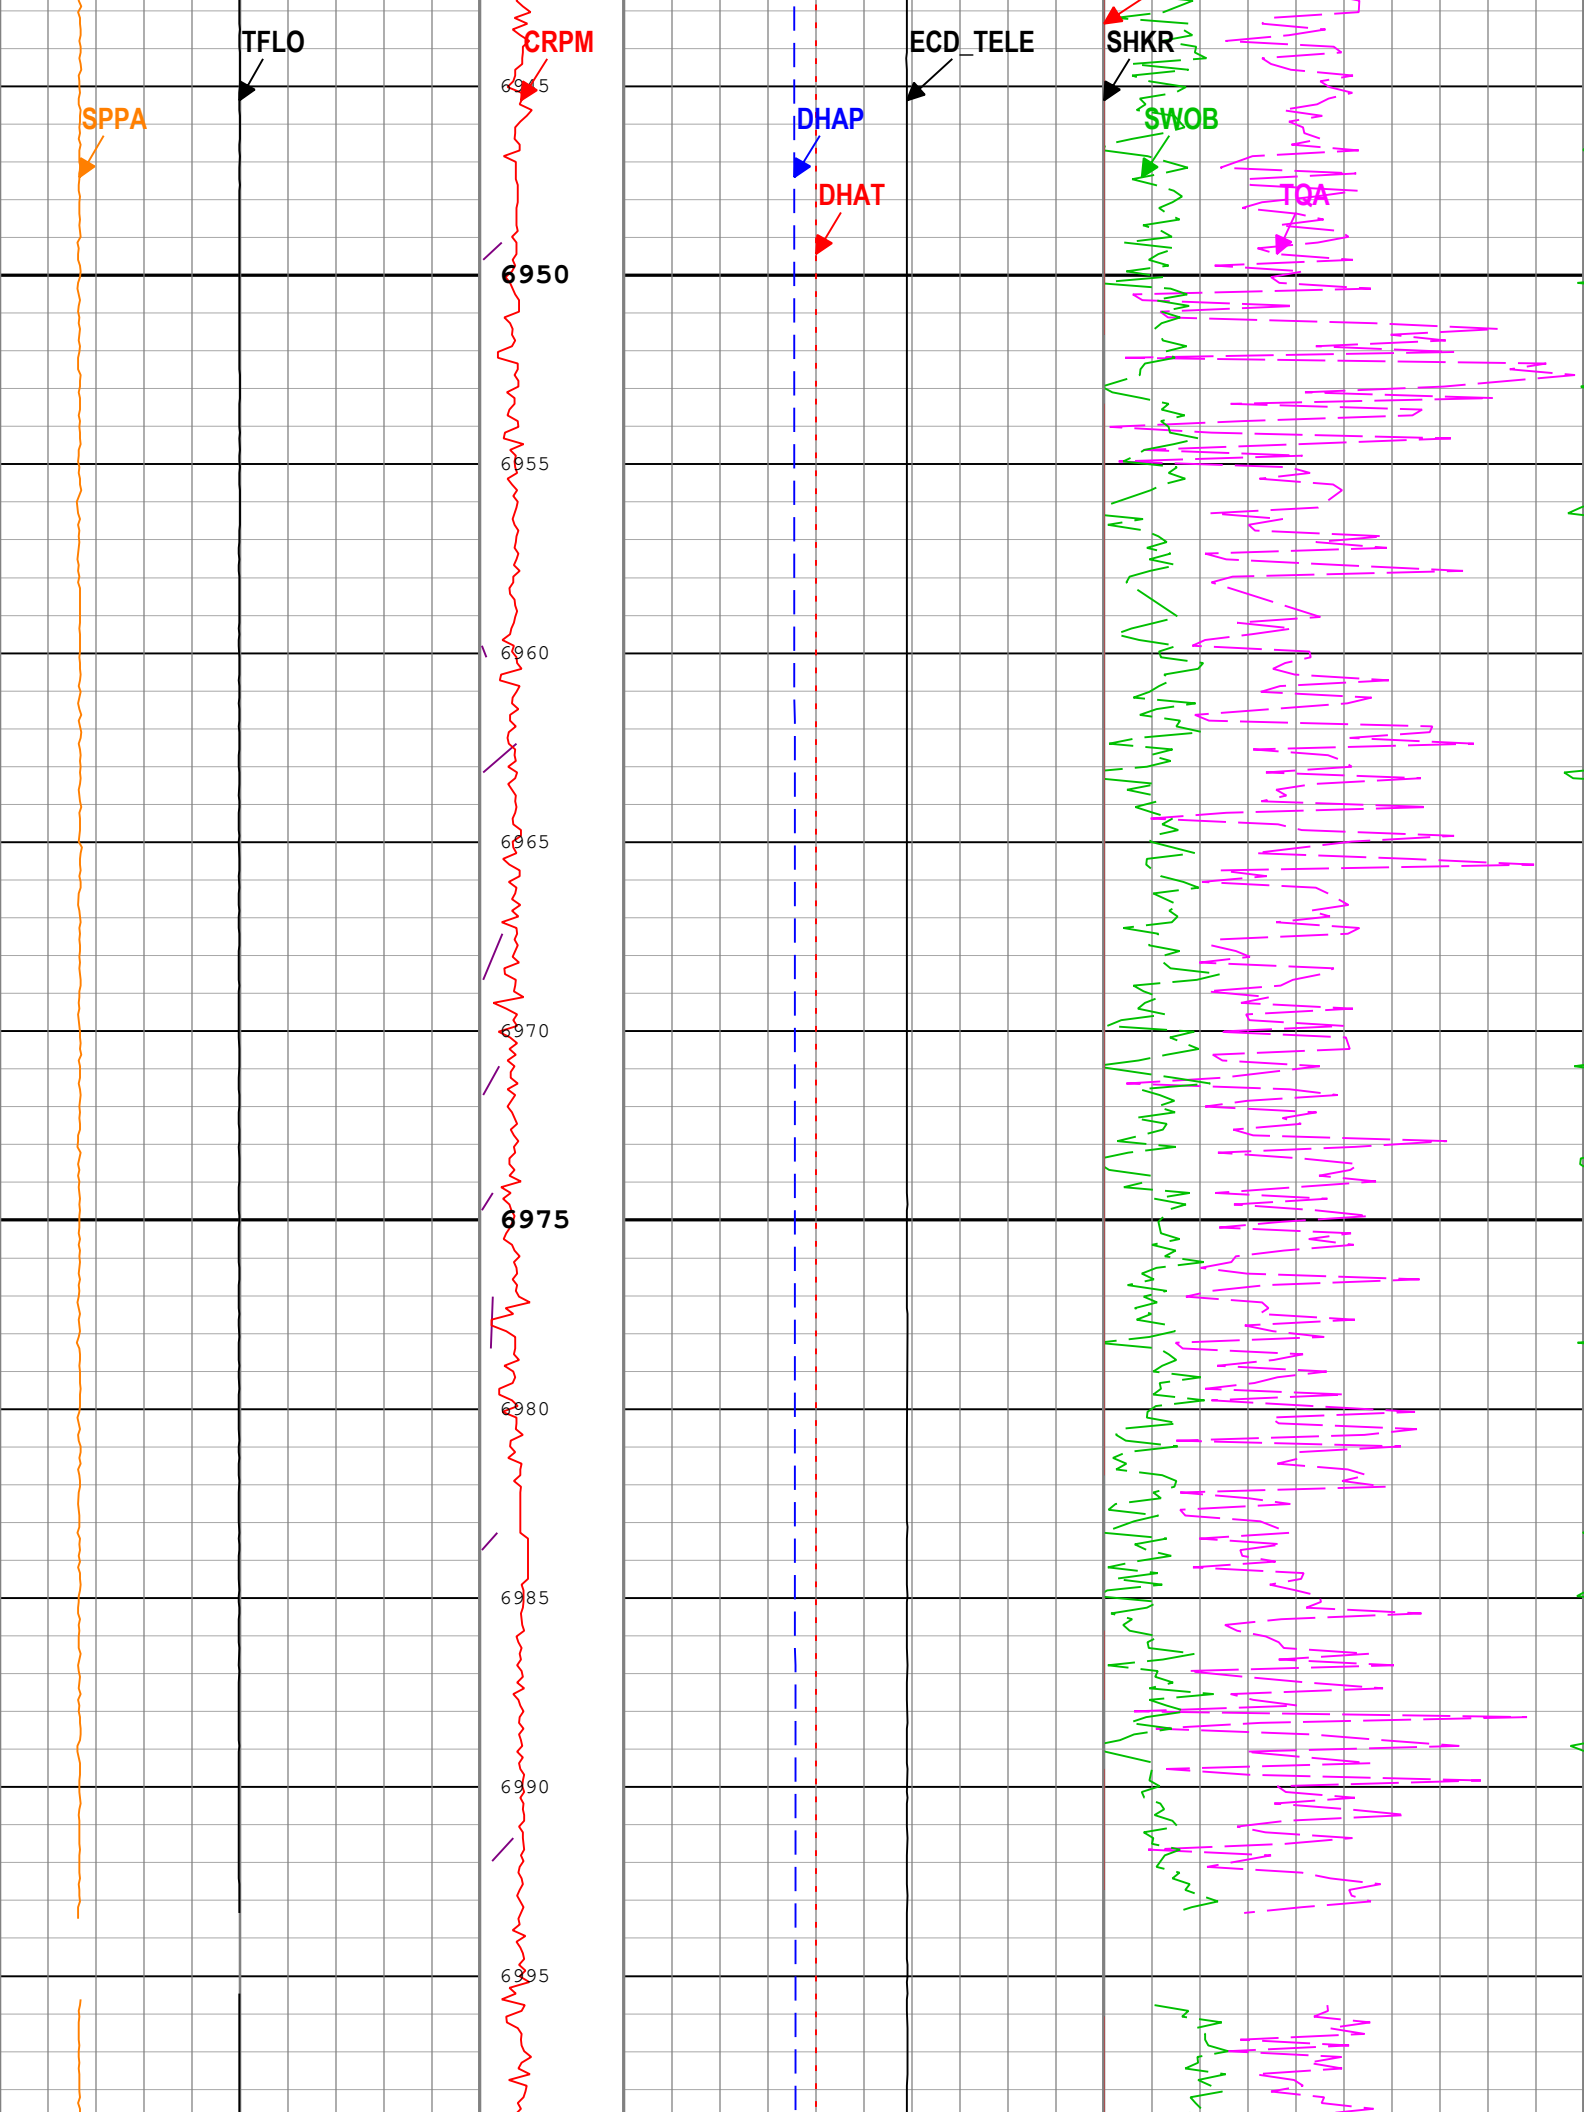

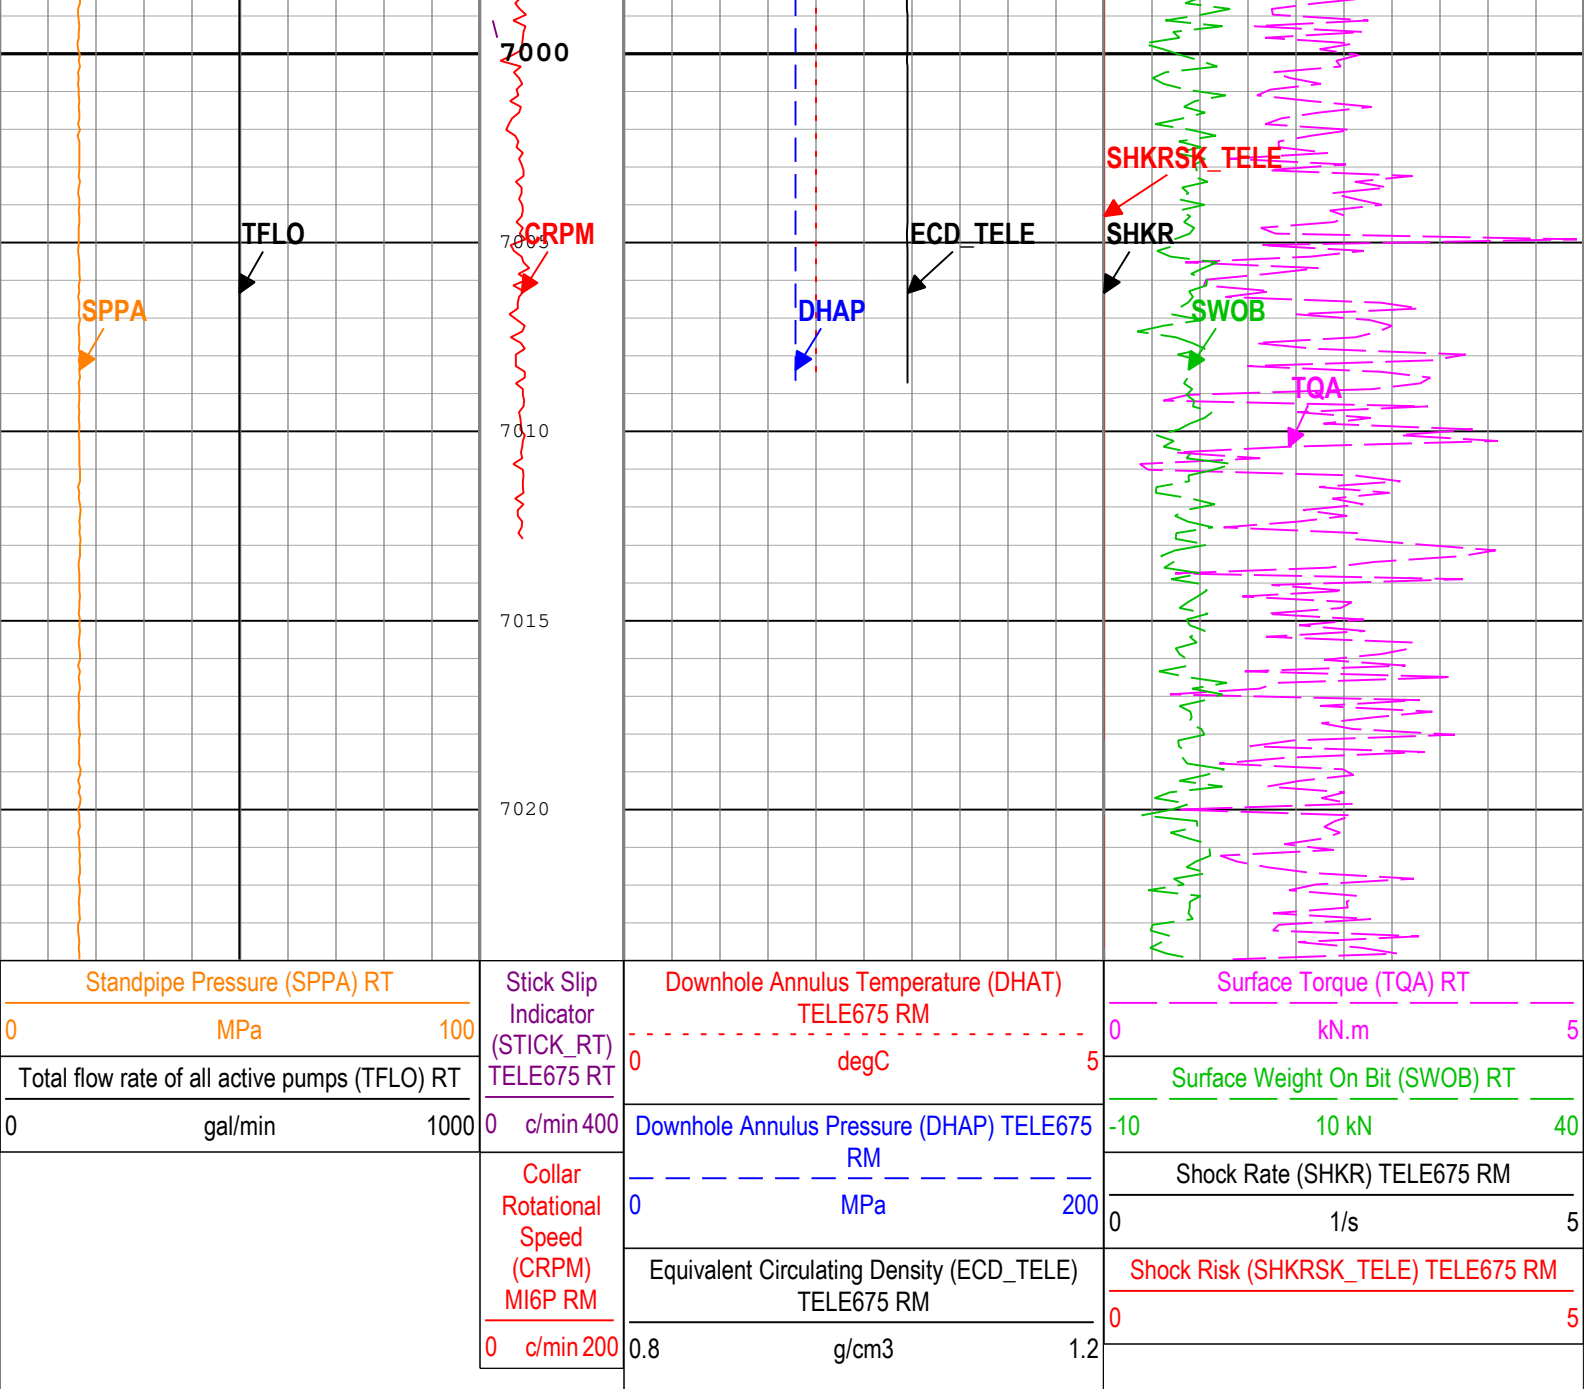


Description: MI6 Resistivity, Deep Button Image RM Format: Log (DML_Depth_RM MD200) Index Scale: 1:200 Index Unit: m Index Type: Measured
Depth Creation Date: 11-Oct-2024 01:38:43

Channel Processing Parameters				
C0019F_Run1: Parameters				
Parameter	Description	Tool	Value	Unit
APRE	Atmospheric Pressure	Borehole	1013.25	mbar
DEPTH_SEL	Depth Selection Parameter	DNMSESSION	Driller's Depth	
DHAP_SRC	DHAP Input Channel Name	TELE675	DHAP	
FLEV	Depth of Drilling Fluid Level to LMF (Log Measured From)	Borehole	-25.5	m
RHO_SEAWATER	Density of the Sea Water	Borehole	1.02	g/cm3
SF_FLAG	Mud Return to Sea Floor (No Riser)?	Borehole	Yes	
TREE_HEIGHT	Tree Height	Borehole	0	m

Tool Control Parameters				
C0019F_Run1: Parameters				
Parameter	Description	Tool	Value	Unit
OFFBTM_TH	Threshold for deciding whether the bit is off bottom	DNMSESSION	0.6	m

Field: C0019/C0026
Rig Name: The "Deep Sea D/V CHIKYU"
Prefecture: Miyagi
Country: Japan

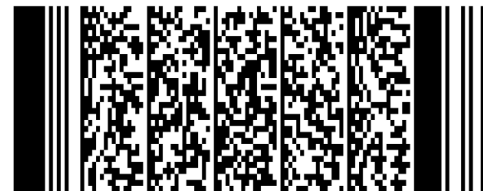

Drilling Mechanic Log
ECO, DHAT, DHAP. Collar RPM
8.5in Recorded Mode, MD 1:200