

Company:

JAMSTEC

Well:

C0026A

Field:

C0019/C0026

Rig Name:

The "Deep Sea D/V CHIKYU"

Prefecture:

Miyagi

Country:

Japan

MicroScope HD Resistivity Image

GR, HD Resistivity Image, Resistivity

8.5in Real Time Mode, TVDSS 1:200



Company:

JAMSTEC

Well:

C0026A

Field:

C0019/C0026

Rig Name:

The "Deep Sea D/V CHIKYU"

Prefecture:

Miyagi

Country:

Japan

Latitude:

37° 55' 36.12" N

Longitude:

144° 4' 7.68" E

Block:

UWID:

O.1042972.01

Rig Name:

The "Deep Sea D/V CHIKYU"

Rig Type:

Drill ship

FL:

C0019/C0026

FL1:

X: 756017.4m

FL2:

Y: 4203068.8m

Log Measured From: - Drill Floor: 28.50 m

Permanent Datum: - Mean Sea Level



Ground Level: 6928.50 m

Acquisition Dates:

23-Sep-2024 -- 29-Sep-2024

Log Interval:

6957.00mBRT - 7400.44mBRT

Index Types:

SSTVD

Index Scales:

1:200

Depth Source:

Driller's Depth

Depth Sensor:

DES

Print Type:

Final

Spud Date:


13-Sep-2024

Other Services:

Cont. DNI

TAPWD ECD

Delta-T

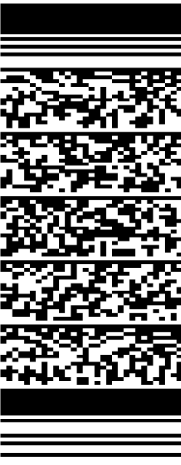

Disclaimer

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SLB AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

Contents

1. Header	
2. Disclaimer	
3. Contents	
4. Well Sketch	
5. Borehole Size/Casing/Tubing Record	
6. Operational Run Summary	
7. Borehole Fluids	
8. Remarks and Equipment Summary	
9. Survey Record	
10. UDComposite1	
10.1 Integration Summary	
10.2 Software Version	
10.3 Composite Summary	
10.4 Log (MicroScope_SonicScope RT TVD200)	
10.5 Parameter Listing	
11. Calibration Report	
12. Tail	

Well Sketch

Driller Depth
6954.000 m





Borehole Size/Casing Record

Bit						
Bit Size (in)	8.5					
Top Driller (m)	6954					
Bottom Driller (m)	7404					

Operational Run Summary

Parameter (unit)	C0026A_Run 1					
Date Log Started	23-Sep-2024					
Time Log Started	15:00:45					
Date Log Finished	29-Sep-2024					
Time Log Finished	09:39:48					
Bit Size (in)	8.500					
Bit Start Depth (m)	6957.000					
Bit Stop Depth (m)	7405.000					
Top Log Interval (m)	6957.000					
Bottom Log Interval (m)	7400.442					
Max Hole Deviation (deg)	0.36					
Azimuth of Max Deviation (deg)	163.18					
Logging Unit Number	OLU-MAB 20011					
Logging Unit Location	Zone2					
Recorded By	W.Song/Q. Ruan/ N. Sato/K. Kawaguchi					
Witnessed By	A. Wspanialy					
Service Order Number	O.1042972.01					

Borehole Fluids


Parameter(unit)	C0026A_Run 1					
Fluid Type	Water					
Fluid Name	Sea Water					
Max Recorded Temperatures (degC)	5					
Source of Sample	Active Tank					
Salinity (ppm)	36776.8					


Density (g/cm3)	1.03					
Funnel Viscosity (s)						
Fluid Loss (cm3)						
PH	7					
Source RMF	Calculated					
RMC	Calculated					
RM @ Meas Temp (ohm.m@degC)	0.07 @ 5					
RMF @ Meas Temp (ohm.m@degC)	0.06 @ 5					
RMC @ Meas Temp (ohm.m@degC)	0.11 @ 5					
RM @ BHT (ohm.m@degC)	0.07 @ 5					
RMF @ BHT (ohm.m@degC)	0.06 @ 5					
RMC @ BHT (ohm.m@degC)	0.11 @ 5					
Total Solid (%)						
High Gravity Solids (%)						

Remarks and Equipment Summary

C0026A_Run1: Toolstring				C0026A_Run1: Remarks	
Equip name SONICSCOPE6:H66 Length 31.63 MP name SonicScope Offset 36 XOS6:NCN2161+5 MP6DC:H6636 Upper Stabilizer:BT-6 954-07 Lower Stabilizer:BT-6 954-06 Upper Extender:NA MP6UC:8026 MP6LC:8026 Lower Extender:CHSP C-21 ROP 28.03 Delta-T 26.82 TELE675:SN82493 21.39 TeleScope 49 MSSU675:OSSTJ2306-17 Upper Extender:SN21 MDC675:SN8249349 MMA:4034 MDI:1540	All data presented is from tool's memory and acquired while drilling.				
	Depth reference is driller's depth.				
	Drilling fluid is sea water.				
	MicroScope Gamma Ray is environmentally corrected for bit size, tool size, and mud weight				
	MicroScope Resistivity is borehole compensated and environmentally corrected for bit size and mud resistivity at bottom hole temperature.				
	Record rate for Resistivity from MicroScope is depending on RPM.				
	Drilling log interval: 6957.00mBRT - 7400.44mBRT.				
	Drilling interval: 6957.00mBRT - 7405.00mBRT.				
	Total pumping hours: 86.69hrs. Total drilling hours: 44.24hrs.				
	Reason for Run Ended: 8.5in BHA LIH by stuck pipe.				

PMGD:963
PMEA:4242
MTA:4134
MTK675:0017
APWD:0156
MSSD675:OSSTJ2403-138
Lower Extender, Long
:CHSPC-41

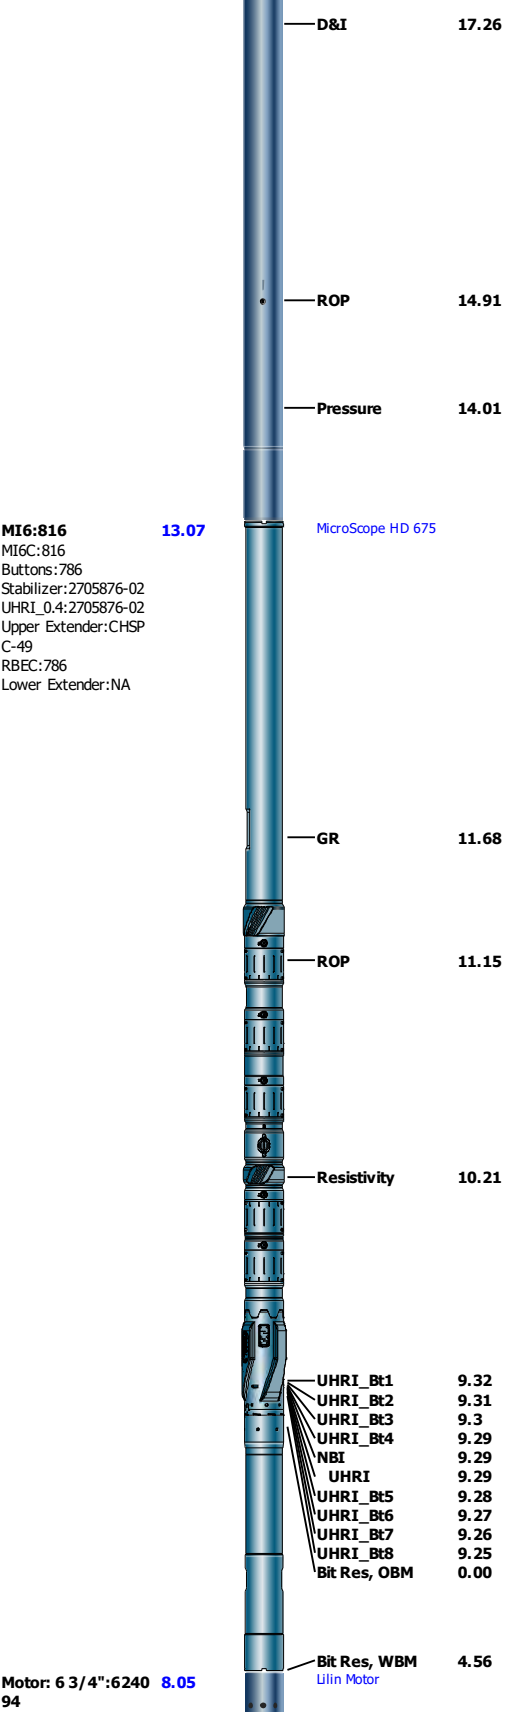

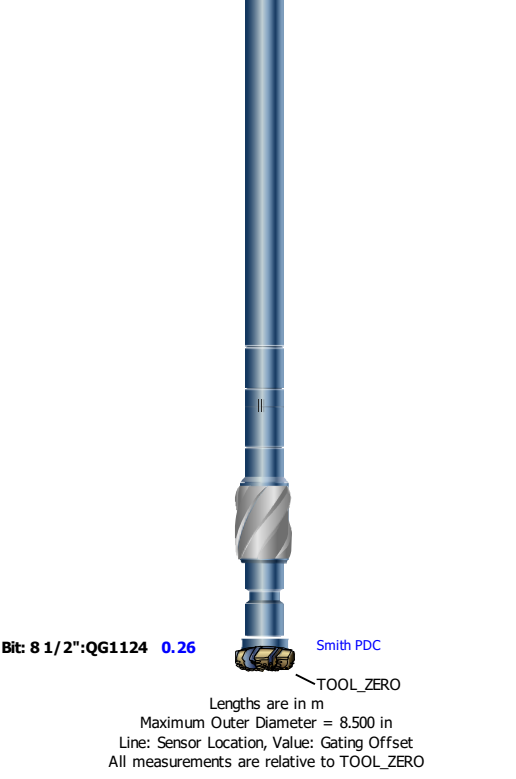

Survey Record

Survey Calculation			
Method :	Minimum Radius of Curvature	DLS Method :	Lubinski
North Reference :	Grid North	Total Correction Formula :	Magnetic Dec - Grid Convergence
Grid Convergence :	1.89 deg		

Rig Location					
Latitude :		37° 55' 36.12" N		Longitude :	
				144° 4' 7.68" E	
Tie In Point					
Measured Depth:	0.000 m	Inclination:	0.00 deg	Azimuth:	0.00 deg
True Vertical Depth:	0.000 m	North Displacement:	0.000 m	East Displacement:	0.000 m
N/-S VSec Origin:	0.000 m	E/-W VSec Origin:	0.000 m	Vertical Section Azimuth:	0.00 deg


D&I Inits Computed and Values Used - C0026A_Run1			
Geomagnetic Model :	HDGM 2024	Geomagnetic Date :	15-Jul-2024
Computed Location B :	46902.89 nT +/- 300.00nT	Used Location B :	46902.89 nT +/- 300.00nT
Computed Location G :	999.32 mgn +/- 2.50mgn	Used Location G :	999.16 mgn +/- 2.50mgn
Computed Magnetic Dip :	51.49 deg +/- 0.45deg	Used Magnetic Dip :	51.49 deg +/- 0.45deg
Computed Magnetic Dec :	-7.74 deg	Used Magnetic Dec :	-7.74 deg
Computed Total Correction :	-9.63 deg	Used Total Correction :	-9.63 deg


Survey Quality Index			
2 : Long Survey failed mag criteria	9 : Manual	28 : Tie-In Point	


Survey Correction Index			
0 : No correction			


Survey Description Index			
0 : Not Flagged Survey	7 : Projection to Bit		


Seq	MD (m)	Incl (deg)	Azim (deg)	Course (m)	TVD (m)	V Sec (m)	N/ -S (m)	E/ -W (m)	Closure (m)	at Azim (deg)	DLS deg/30m	Tool Type	QI	CI	DI
1	0.000	0.00	0.00	- - - -	0.000	0.000	0.000	0.000	0.000	90.00	0.00	TIP	28	0	0
2	6957.00 0	0.00	0.00	6957.00 0	6957.00 0	0.000	0.000	0.000	0.000	90.00	0.00	Other	9	0	0
3	7004.10 9	0.20	265.6 5	47.109	7004.10 9	-0.006	-0.006	-0.083	0.080	265.65	0.13	TeleScope	2	0	0
4	7039.81 7	0.30	305.0 8	35.708	7039.81 7	0.042	0.042	-0.222	0.230	280.81	0.16	TeleScope	2	0	0
5	7079.81 0	0.14	268.6 8	39.992	7079.80 9	0.101	0.101	-0.357	0.370	285.80	0.15	TeleScope	2	0	0
6	7284.66 1	0.36	163.1 1	204.852	7284.65 9	-0.524	-0.524	-0.426	0.680	219.07	0.06	TeleScope	2	0	0

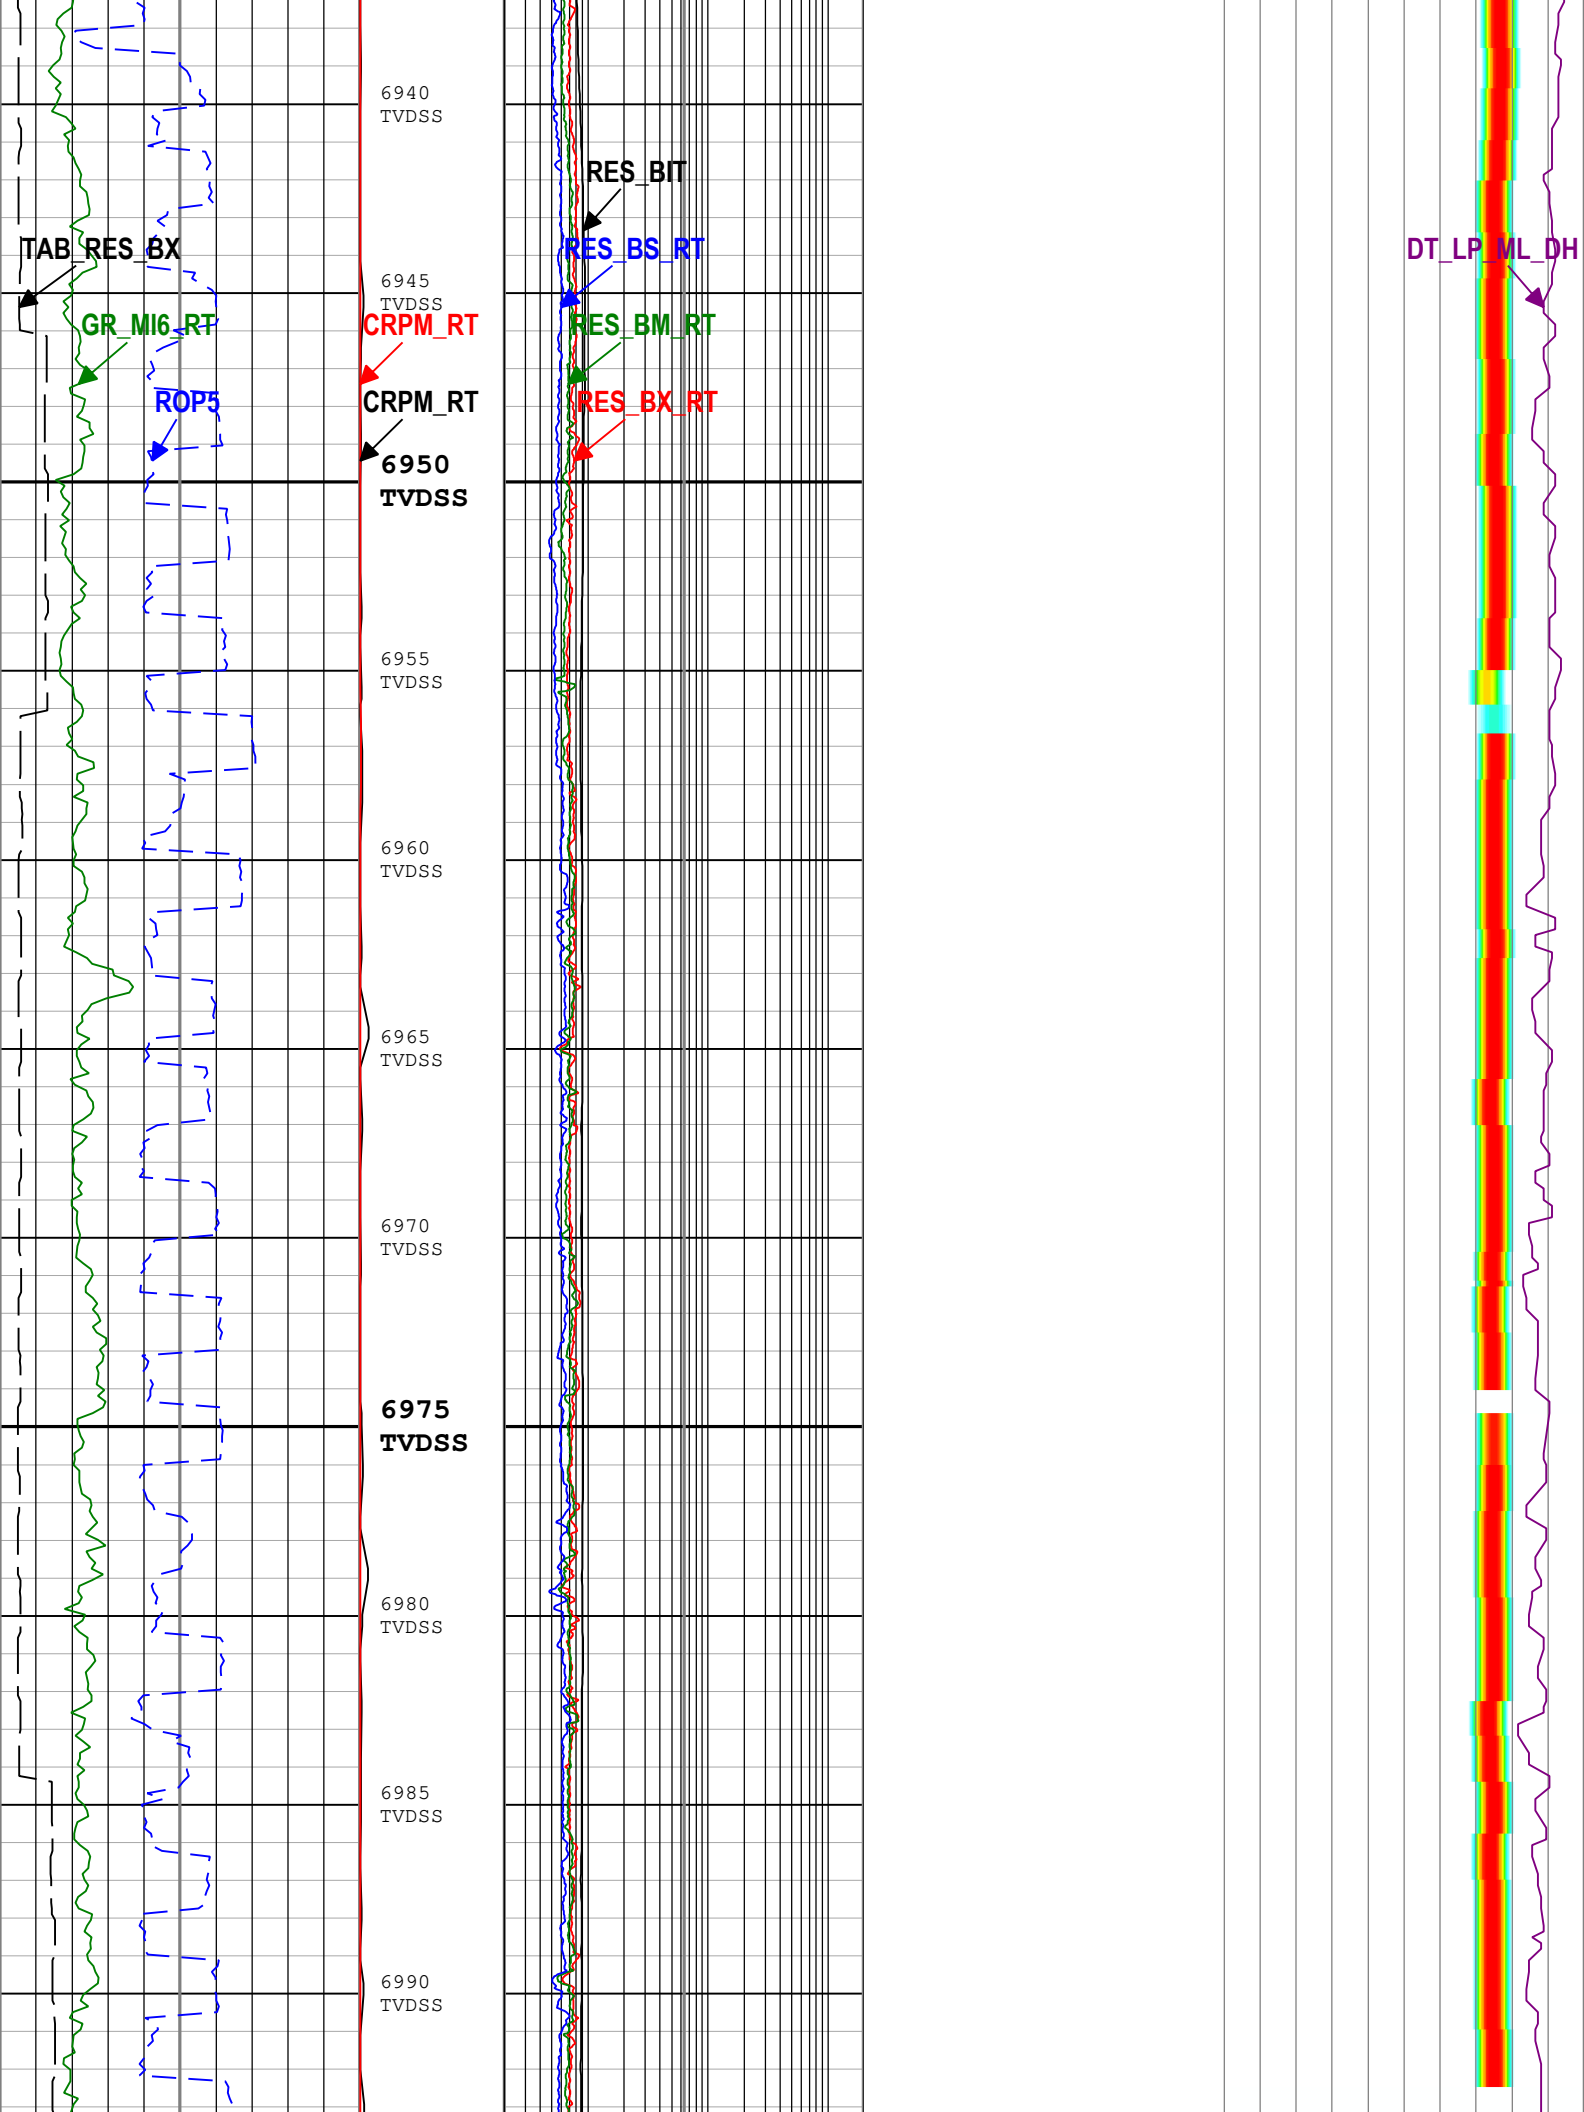


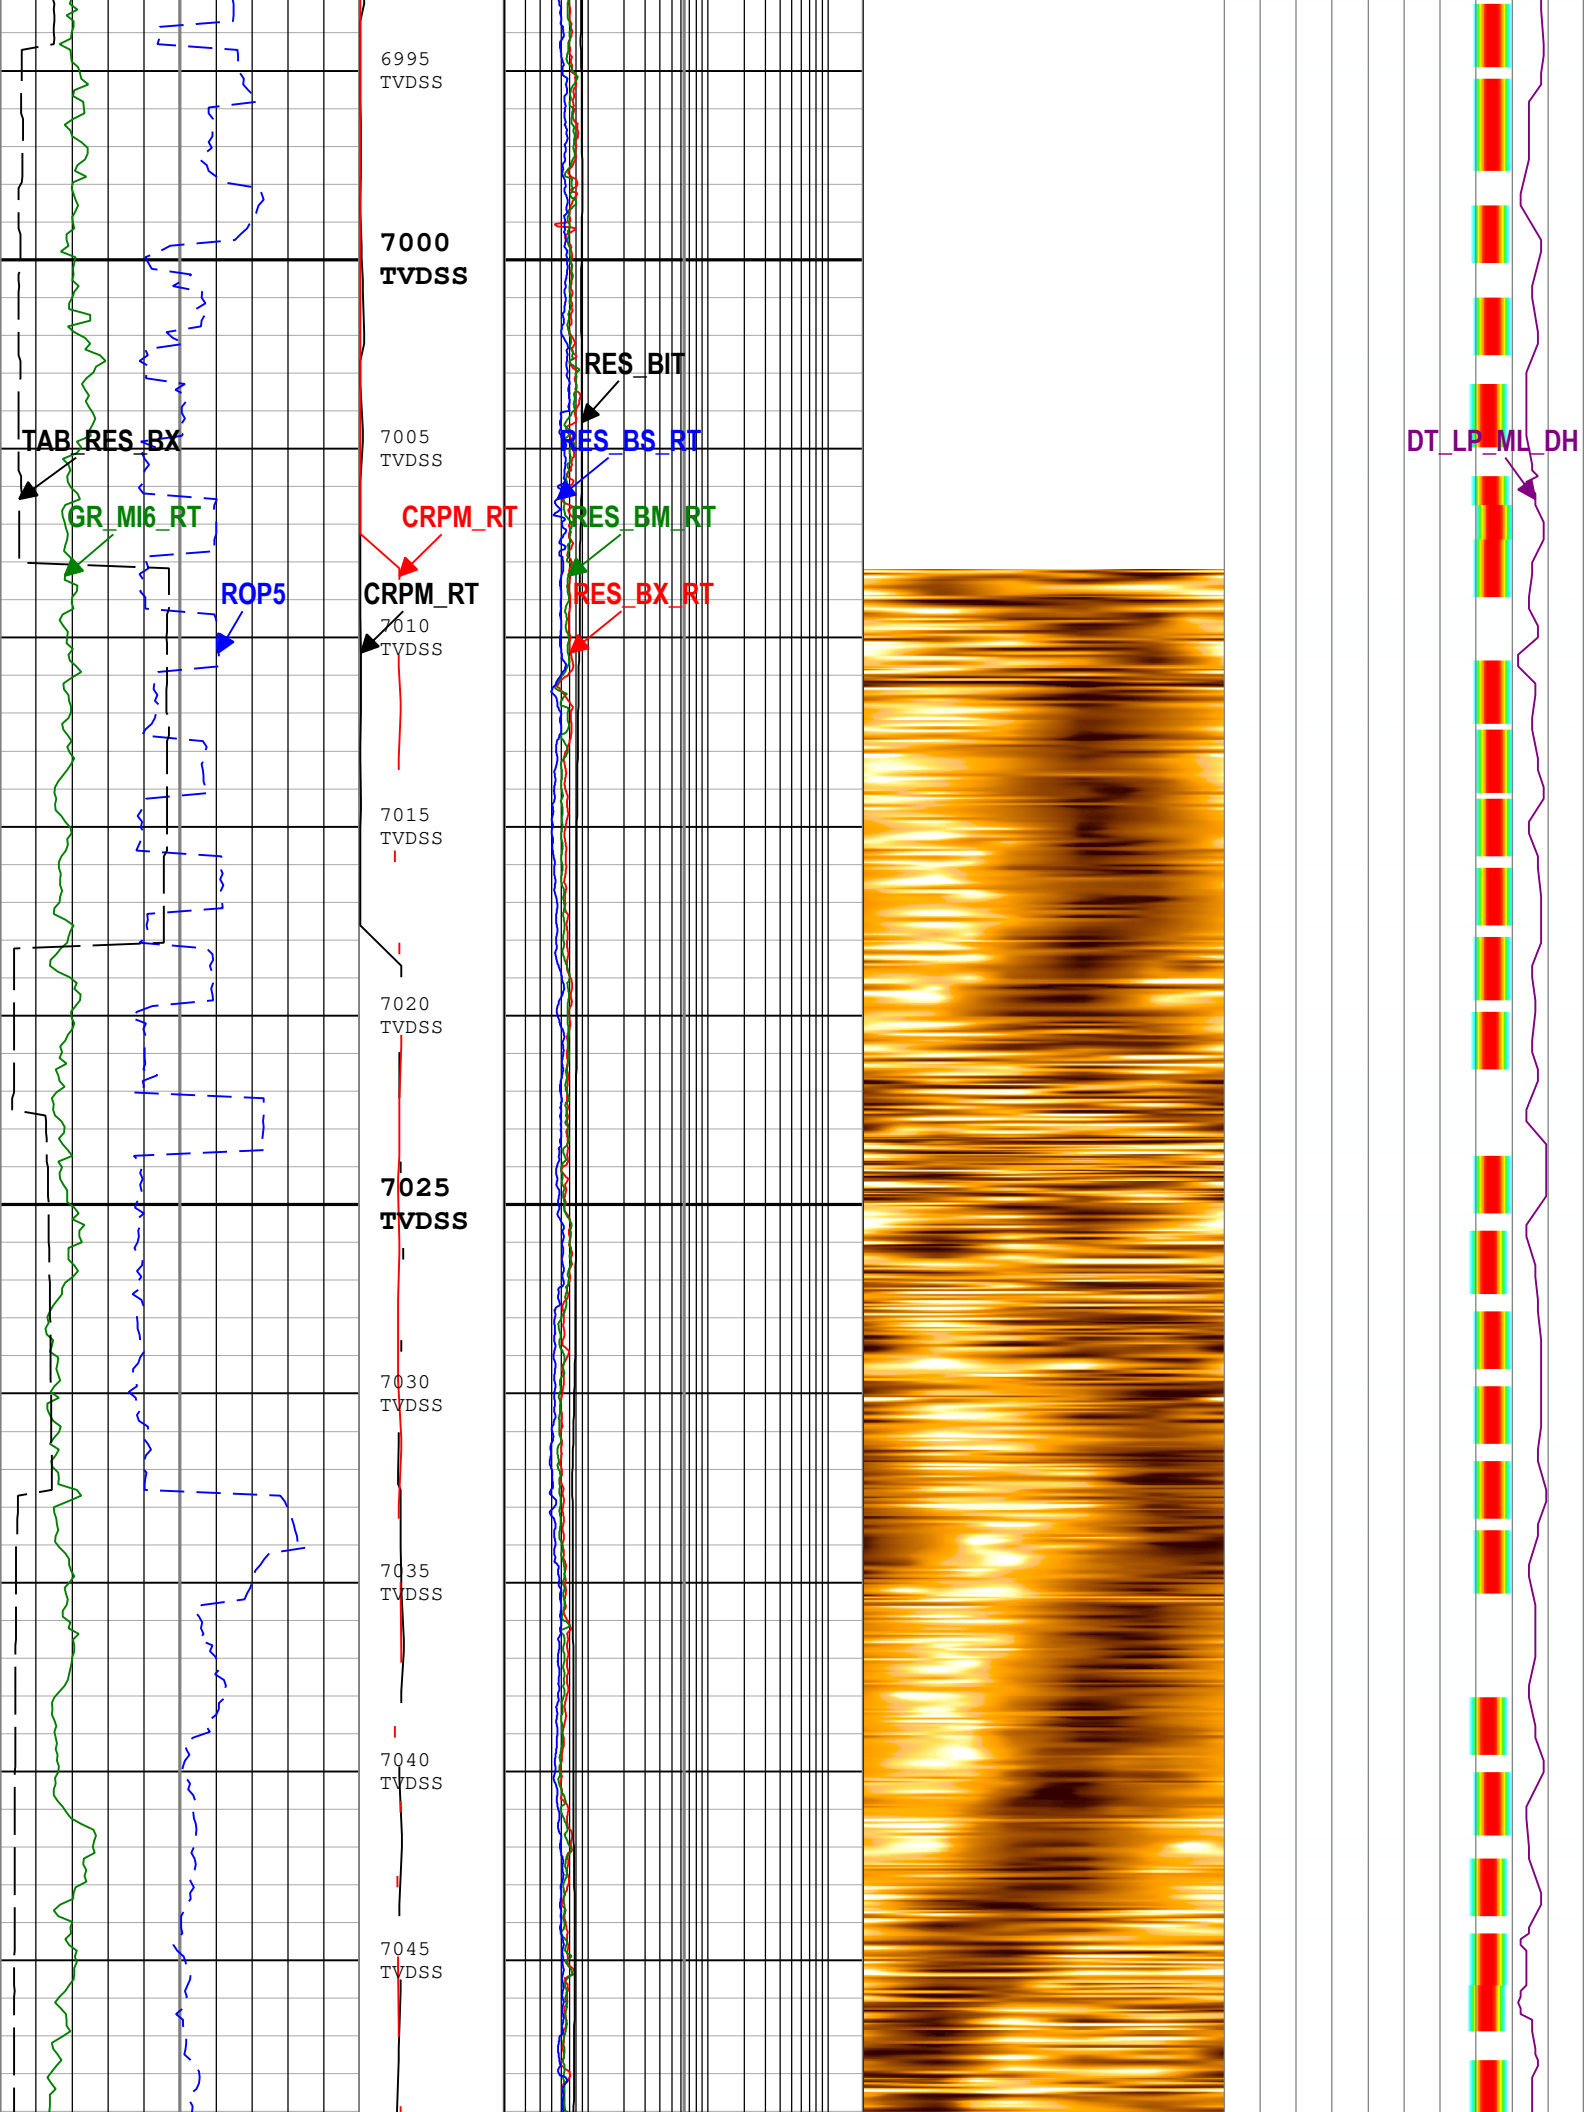


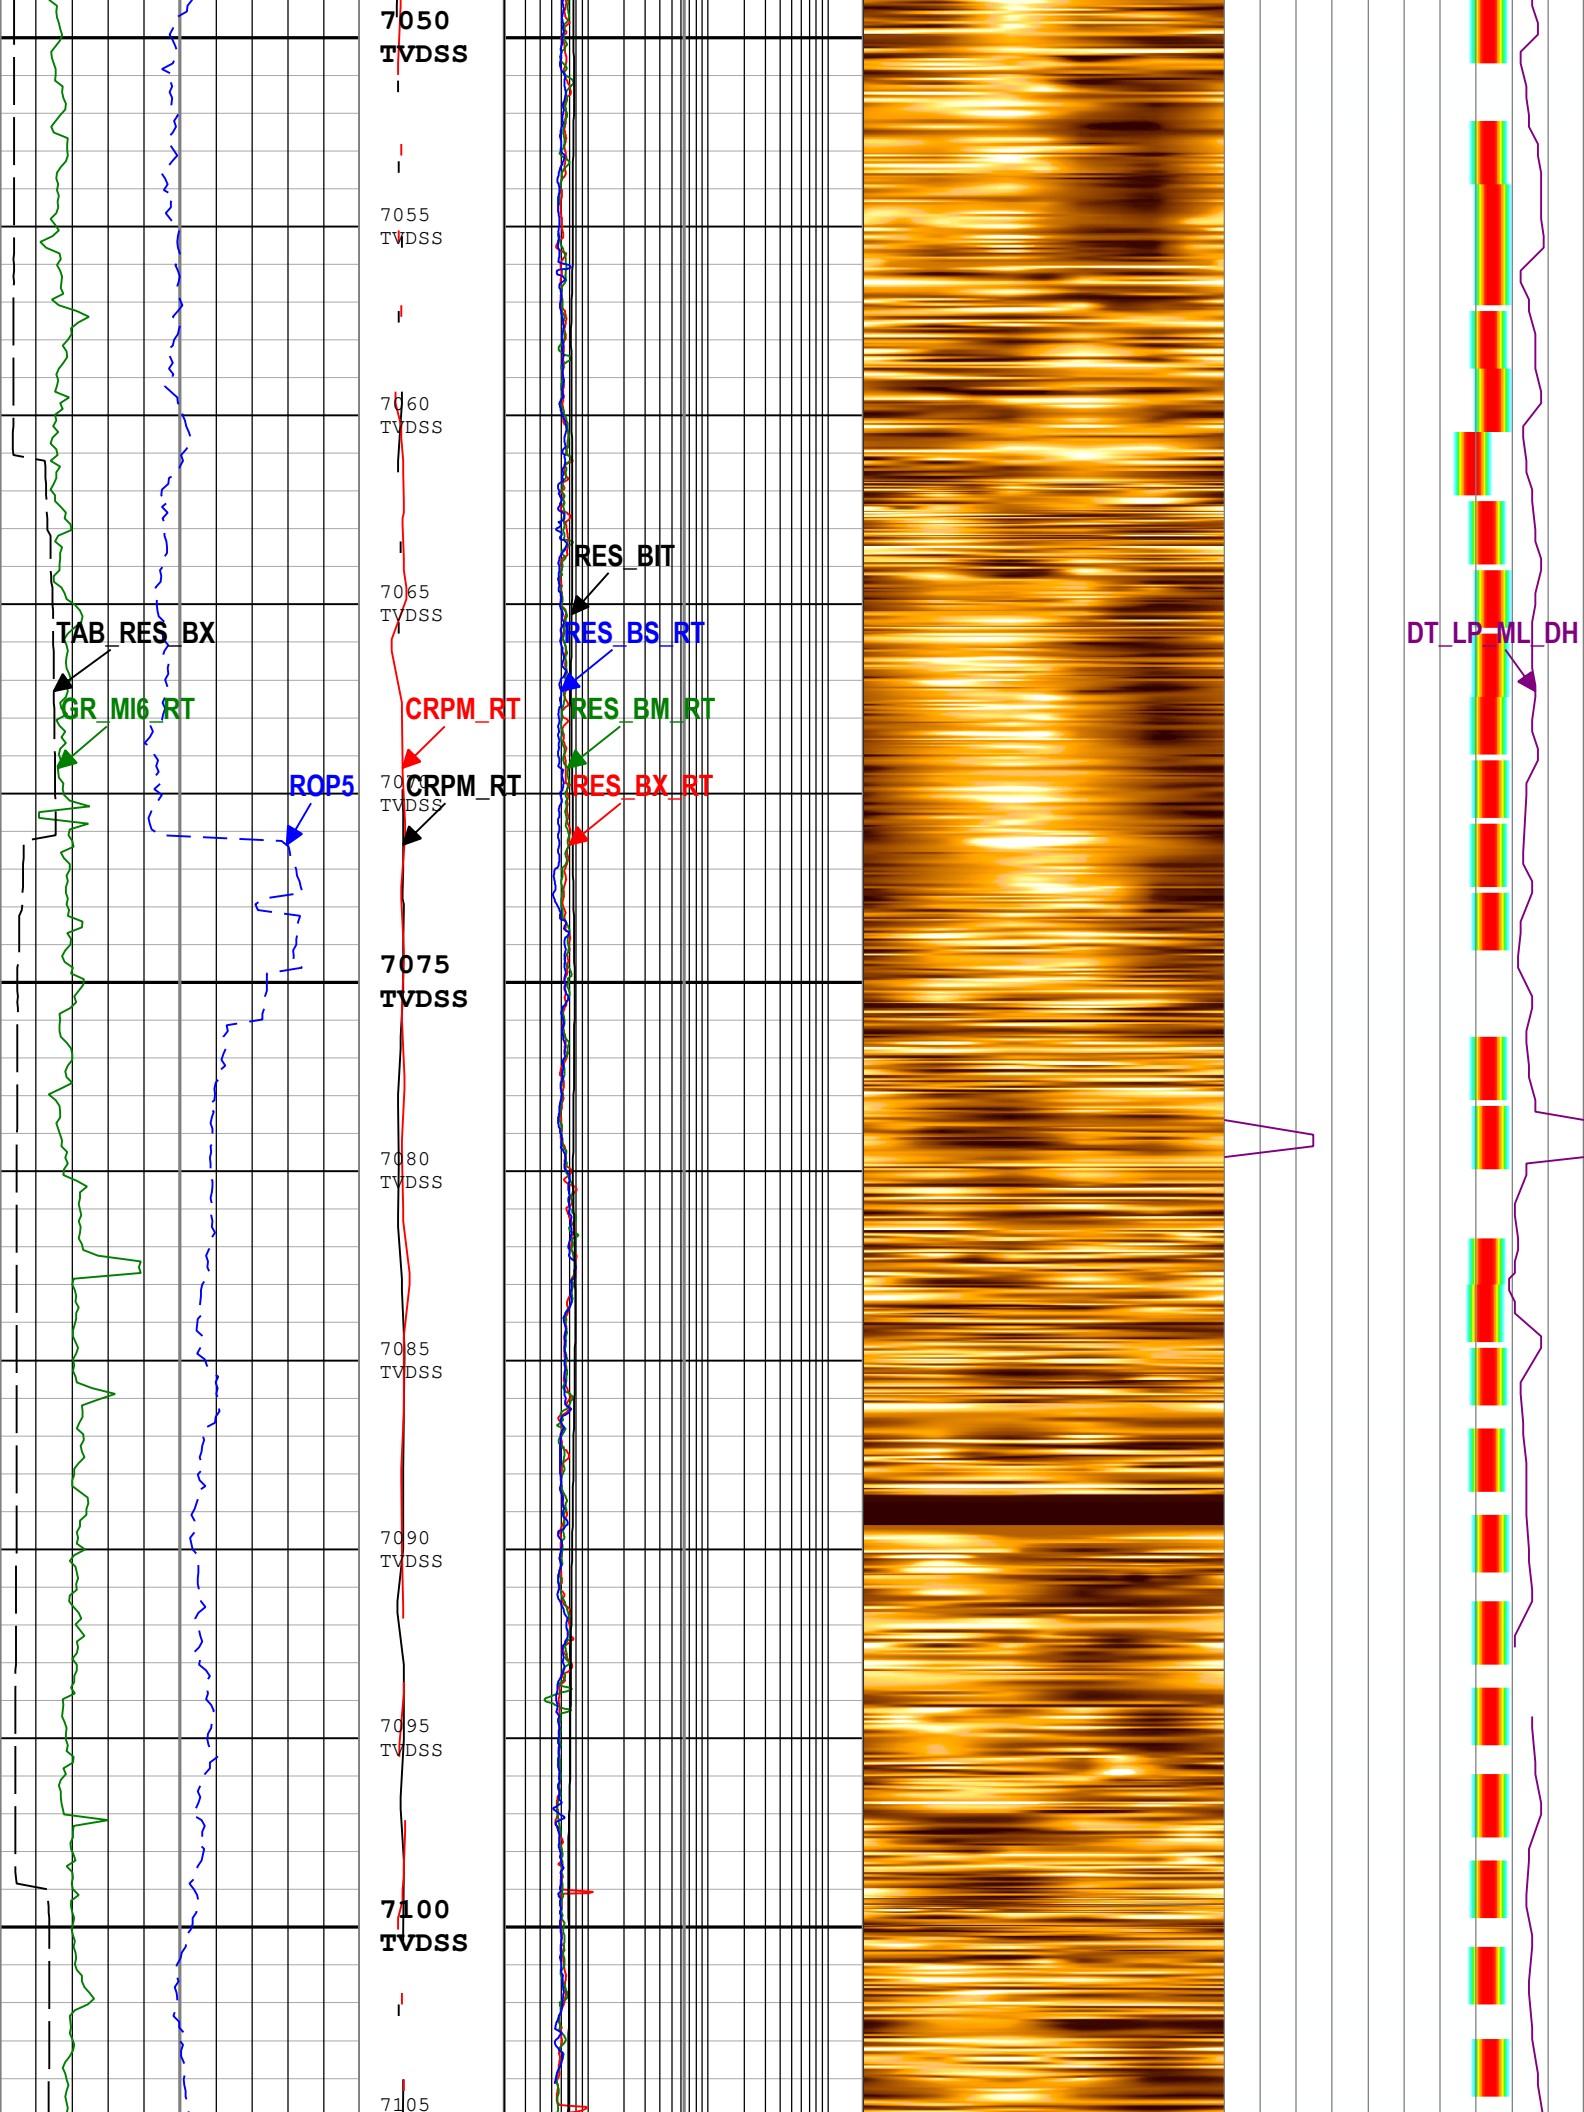


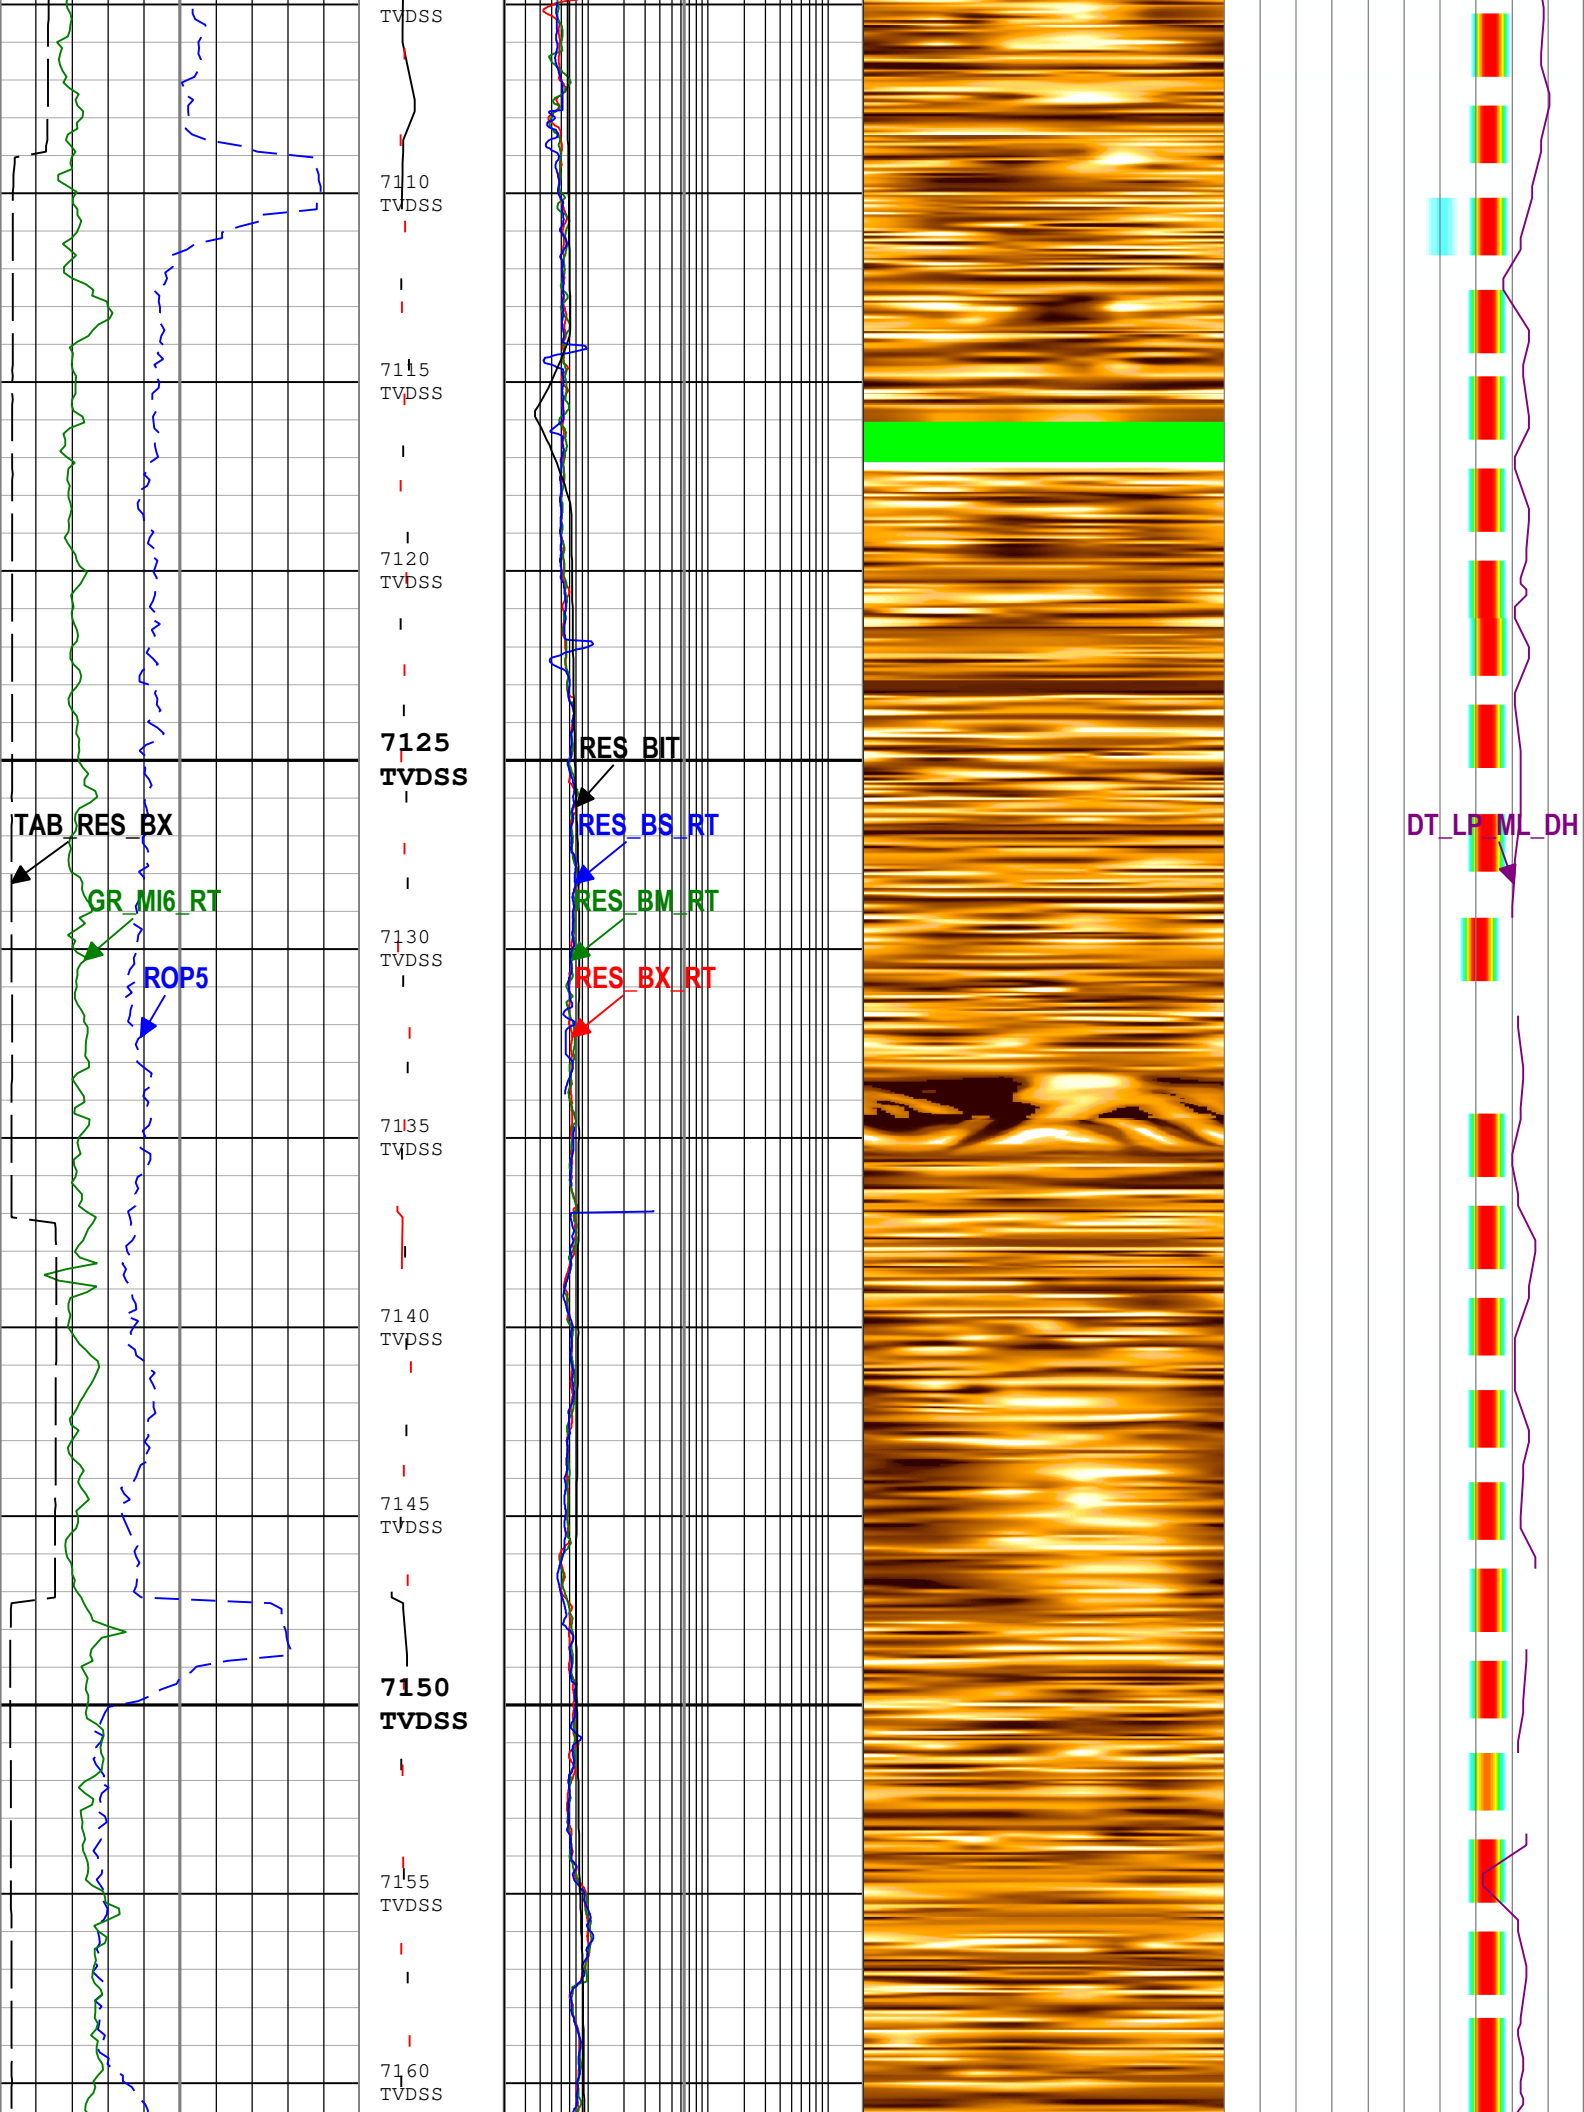

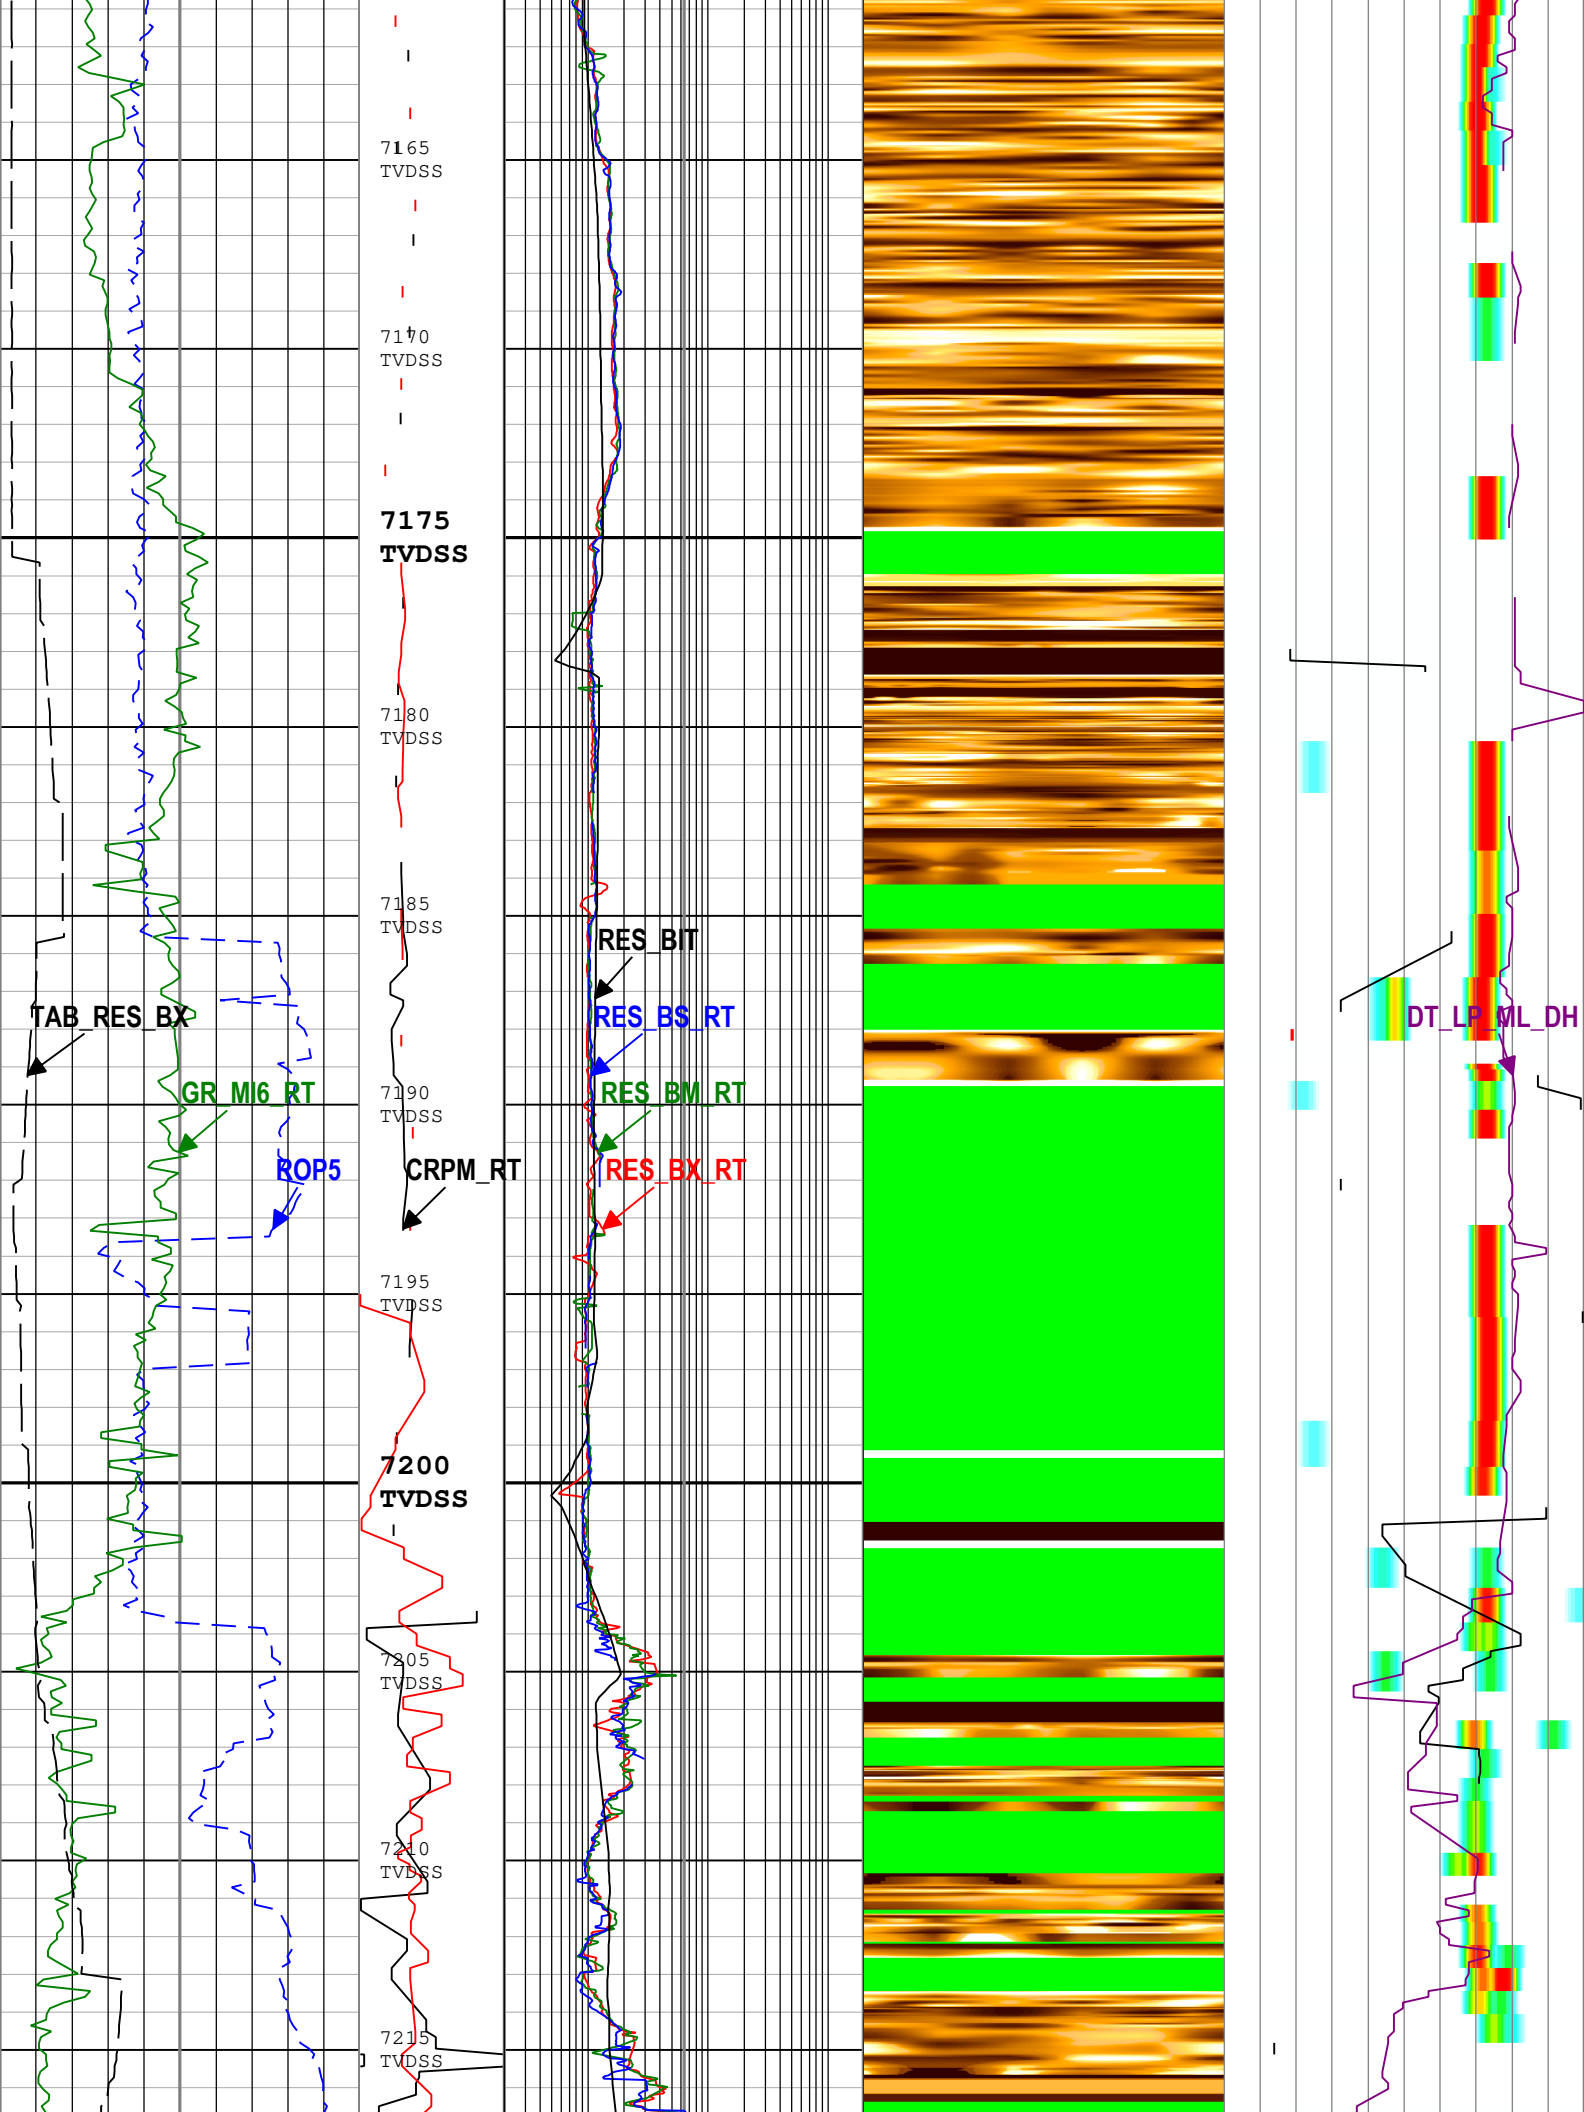

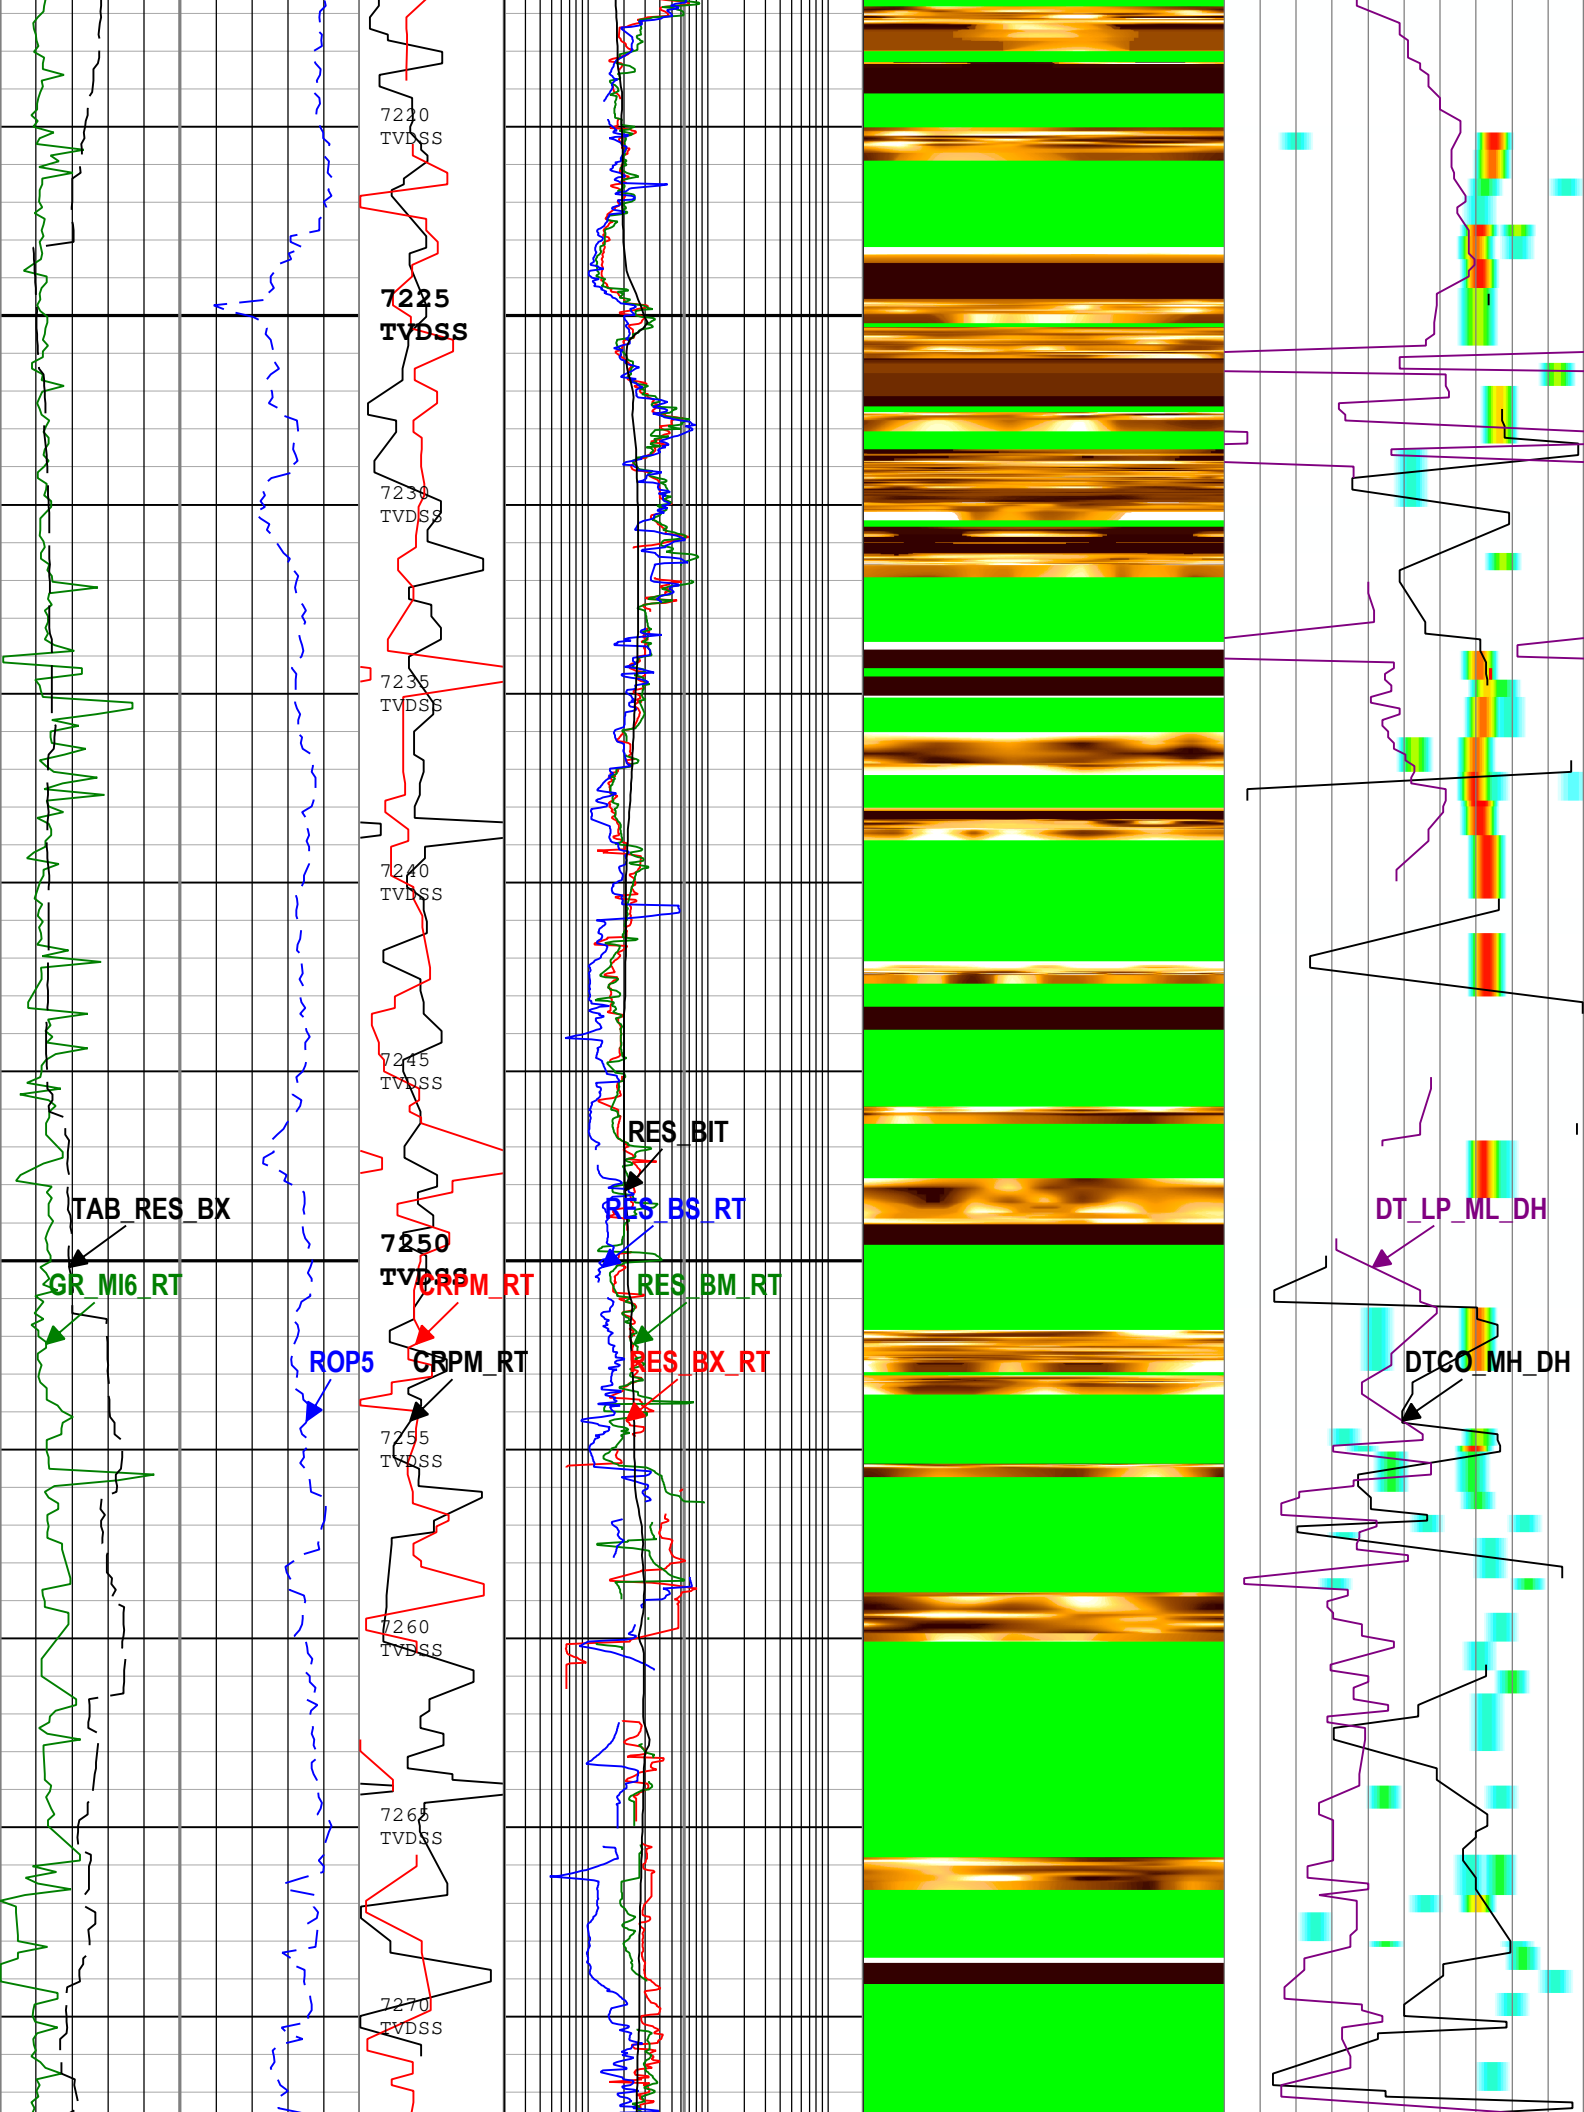

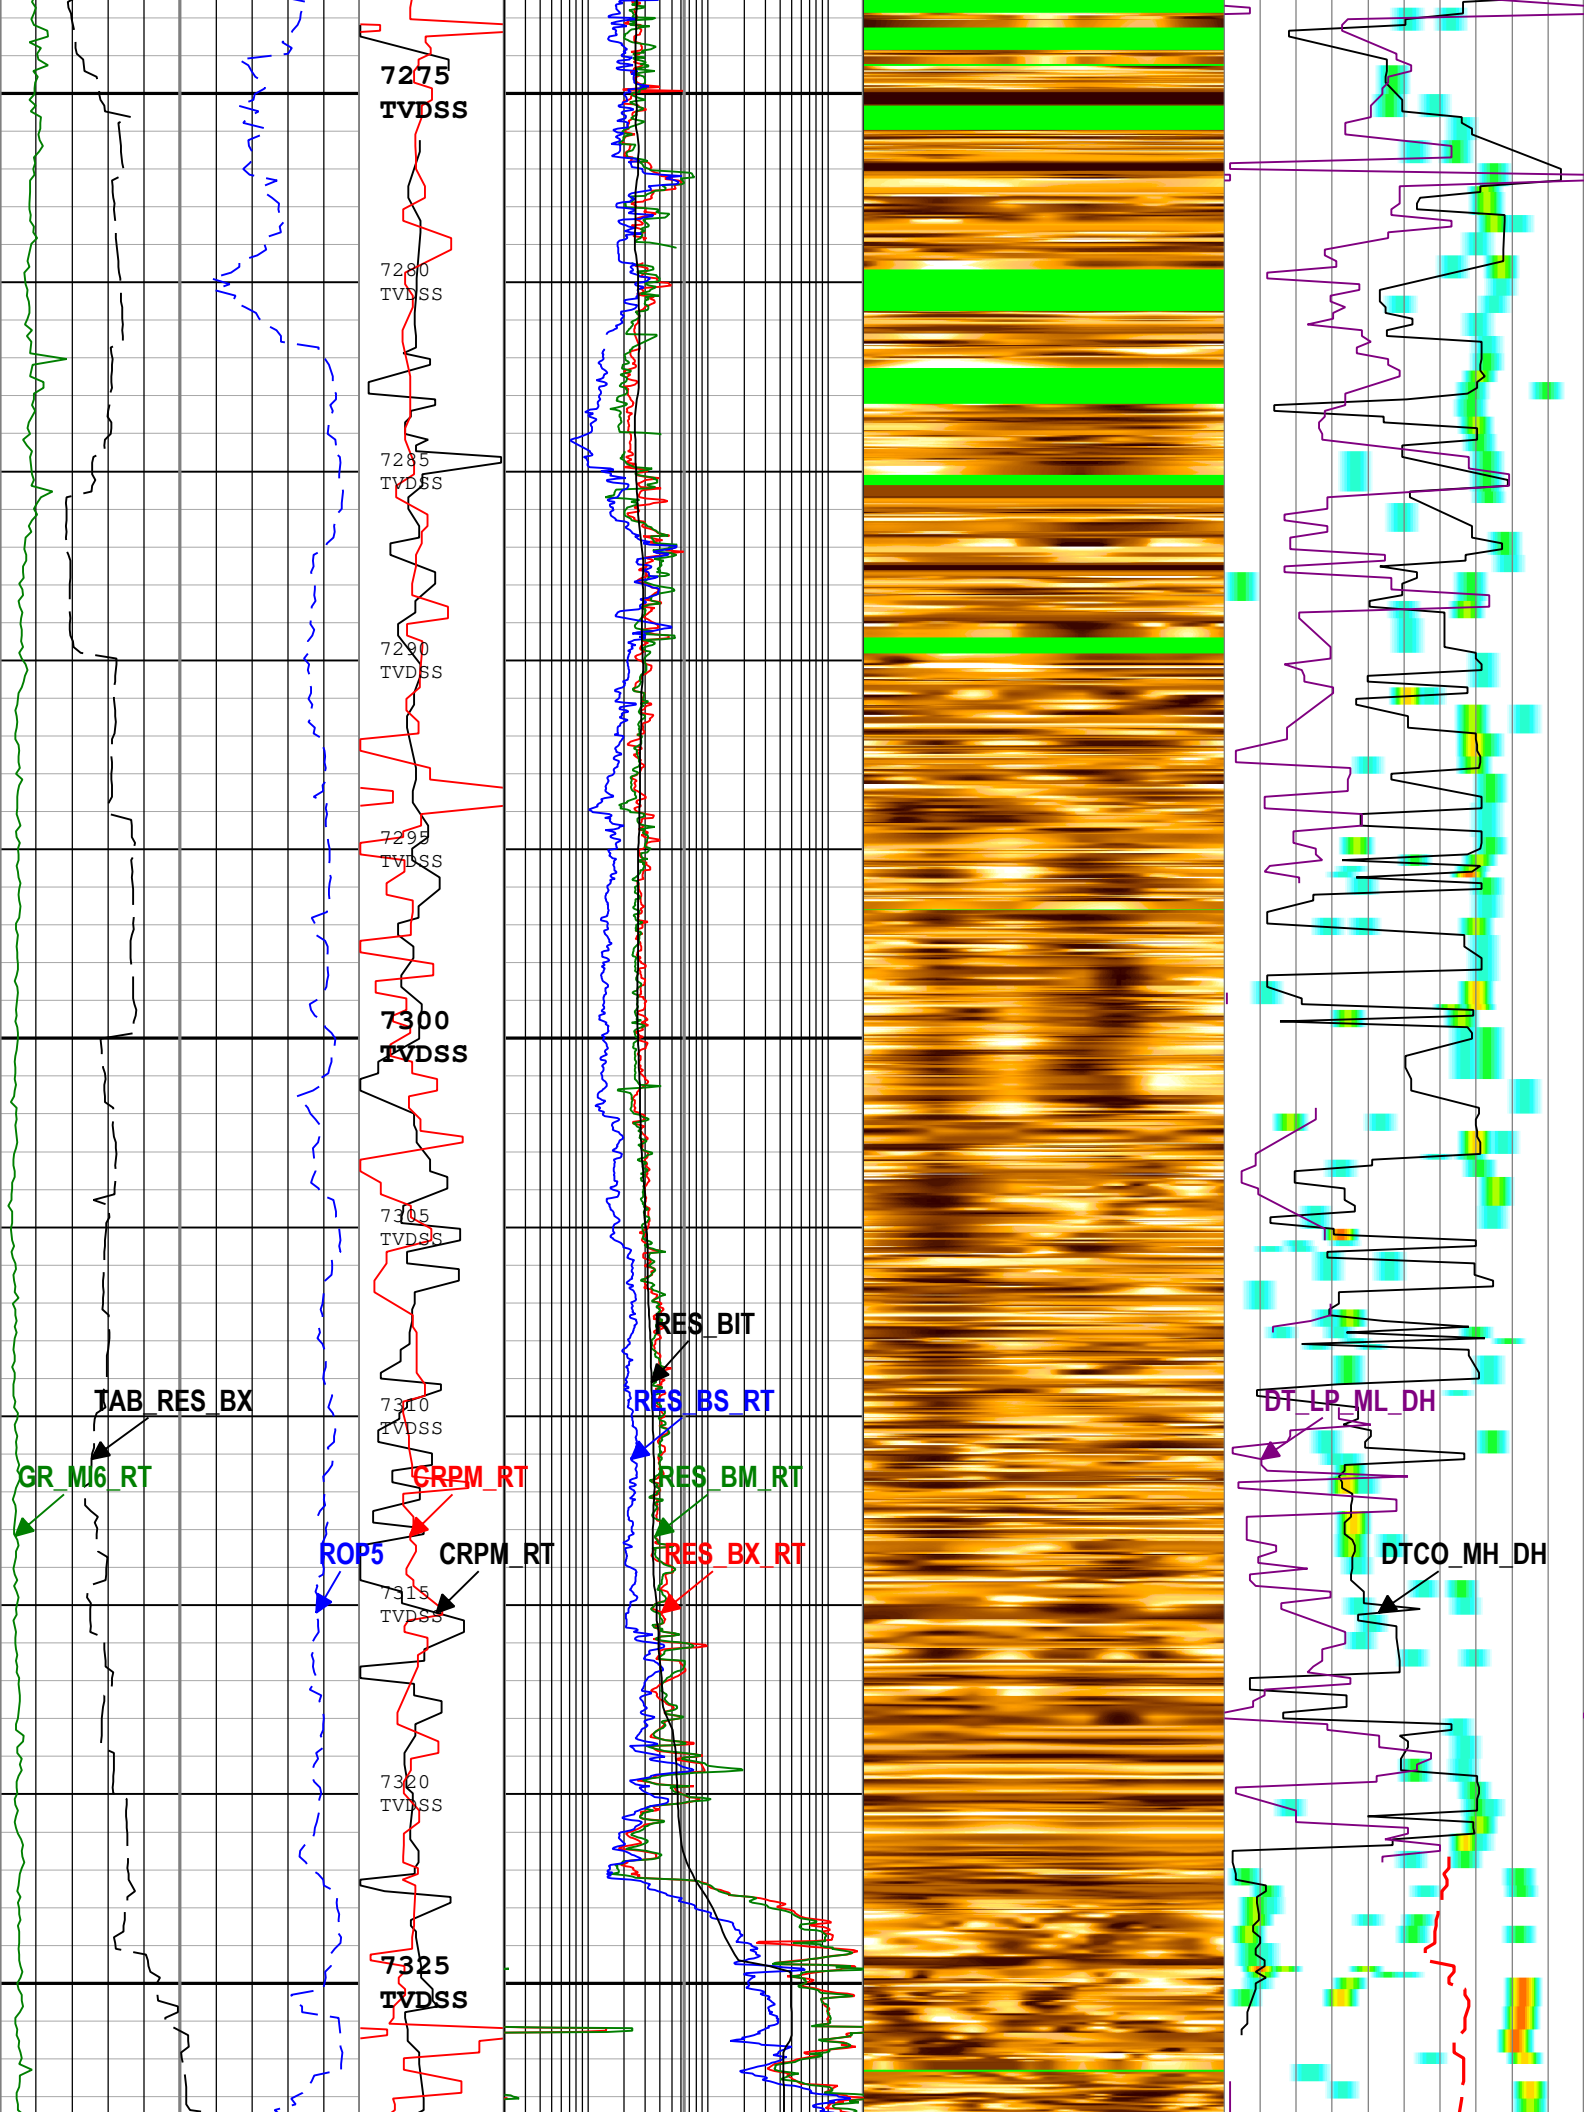

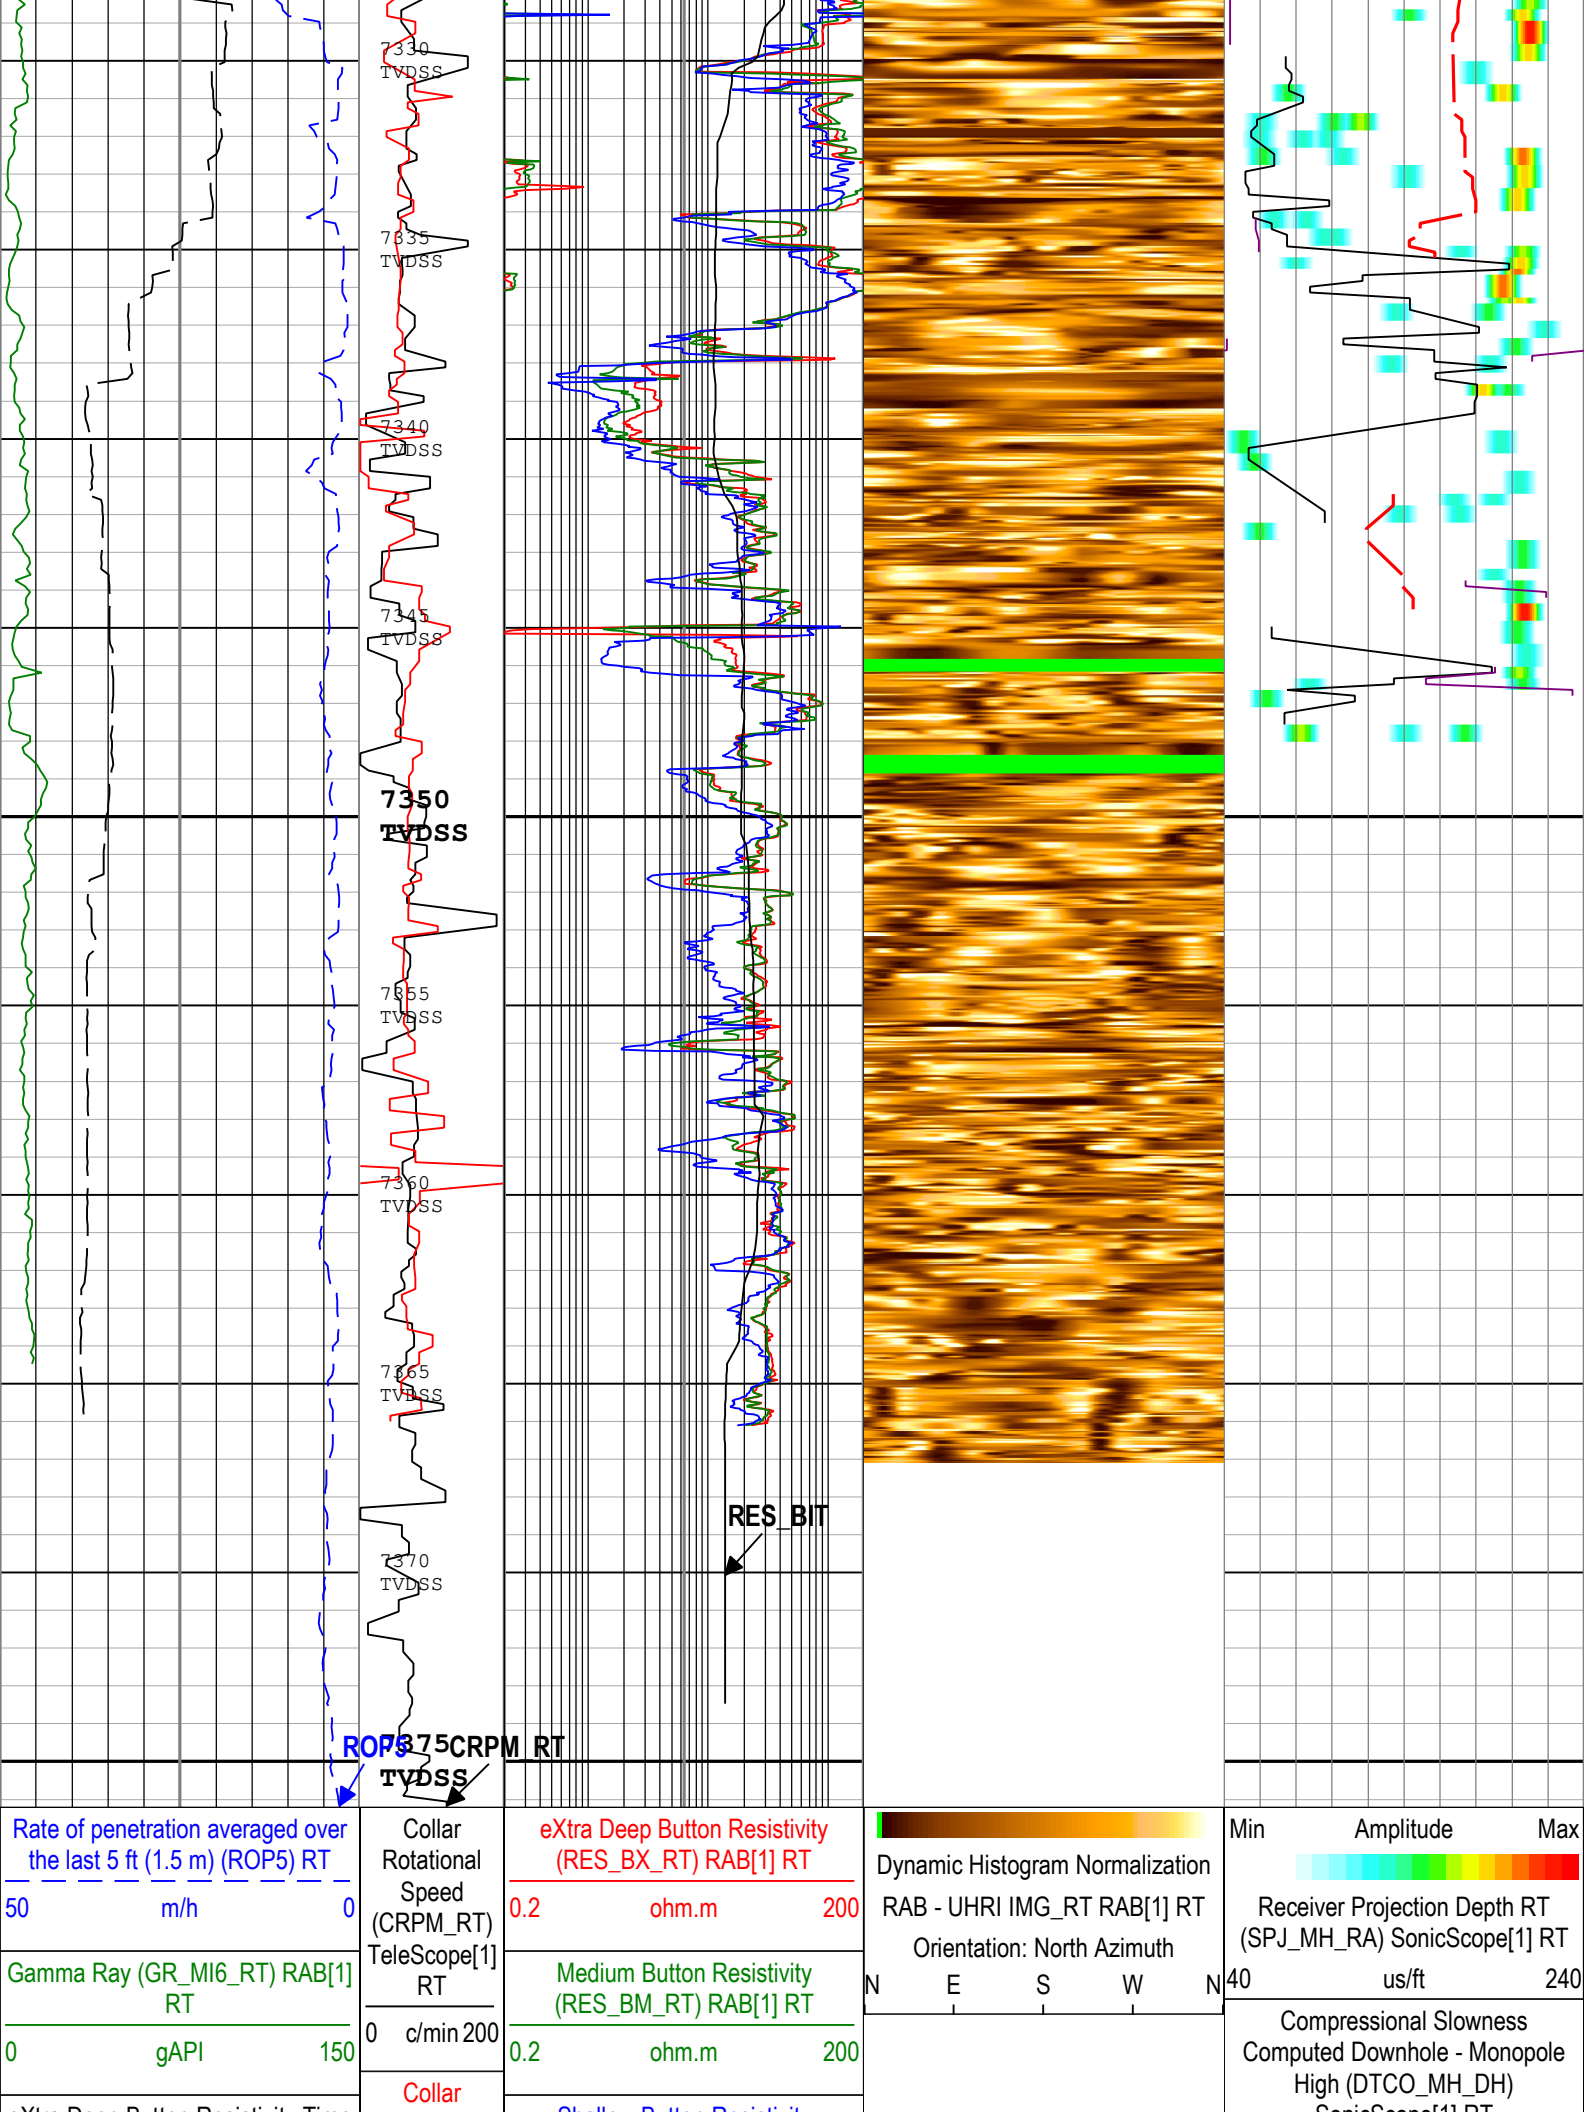

Extra Deep Button Resistivity Time After Bit (TAB_RES_BX) RAB[1]	Rotational Speed (CRPM_RT) RAB[1] RT	Shallow Button Resistivity (RES_BS_RT) RAB[1] RT	SonicScope[1] RT
0h10	0.2ohm.m200	0.2ohm.m200	40us/ft240
	0c/min200	Bit Resistivity (RES_BIT_RT) RAB[1] RT	Shear Slowness Computed Downhole - Quadrupole Inversion (DTSH_QPI_DH) SonicScope[1] RT
		0.2ohm.m200	240us/ft40
			Leaky-P Slowness Computed Downhole - Monopole Low (DT_LP_ML_DH) SonicScope[1] RT
			0us/ft100
Description: Format: Log (MicroScope_SonicScope RT TVD200) Index Scale: 1:200 Index Unit: m Index Type: SSTVD Creation Date: 11-Oct-2024 02:52:05			

Channel Processing Parameters				
C0026A_Run1: Parameters				
Parameter	Description	Tool	Value	Unit
BHK	Drilling Fluid Potassium Concentration	Borehole	0	%
BHT	Bottom Hole Temperature	Borehole	5	degC
BS	Bit Size	DNMSESSION	8.5	in
DEPTH_SEL	Depth Selection Parameter	DNMSESSION	Driller's Depth	
DFD	Drilling Fluid Density	Borehole	1.03	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
GCSE_RT	Generalized Caliper Selection for DnM real time	Borehole	BS	
GGRD	Geothermal Gradient	Borehole	10	degC/km
GRSE_RT	Generalized Mud Resistivity Selection for Realtime Mode	Borehole	REMS(RT)	
GTSE_RT	Generalized Temperature Selection for Realtime Mode	Borehole	GTEM_GRDSURF(RT)	
MST	Mud Sample Temperature	Borehole	5	degC
RMS	Resistivity of Mud Sample	Borehole	0.07	ohm.m
SHT	Surface Hole Temperature	Borehole	15	degC
STPPUL_MH	Upper Limit for Slowness Time Plane Projection - Monopole High	SONICSCOPE6	240	us/ft
Tool Control Parameters				
C0026A_Run1: Parameters				
Parameter	Description	Tool	Value	Unit
OFFBTM_TH	Threshold for deciding whether the bit is off bottom	DNMSESSION	0.6	m
Calibration Report				

Company: JAMSTEC

Well: C0026A

Field: C0019/C0026

Rig Name: The "Deep Sea D/V CHIKYU"

Prefecture: Miyagi

Country: Japan



MicroScope HD Resistivity Image

GR, HD Resistivity Image, Resistivity

