


**geoVISION Resistivity**  
**1:240 Measured Depth**  
**Recorded Mode Data**



**Company:** IODP  
**Well:** U1517A  
**Field:** TLC-04B  
**Rig Name:** Joides Resolution  
**Expedition:** 372  
**Country:** New Zealand

**Latitude:** 38° 49' 46.32" S **UWID:**  
**Longitude:** 178° 28' 33.318" E **Rig Name:** Joides Resolution  
**Block:** EXP372 **Rig Type:** Drill Ship

**FL1:**  
**FL2:**

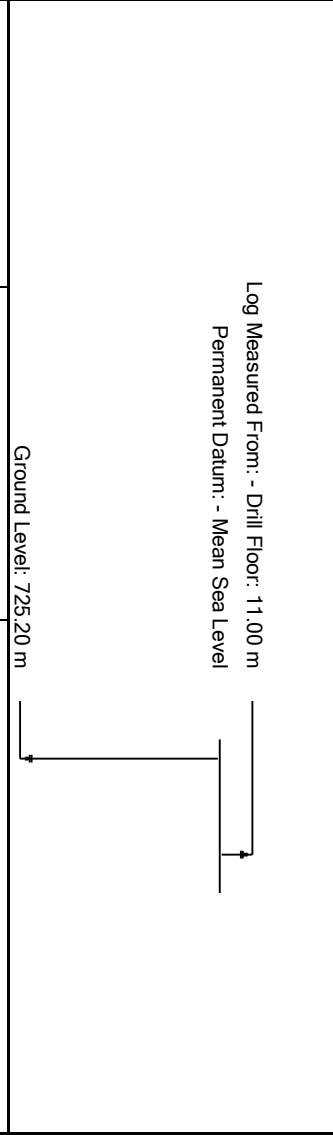

<b>Acquisition Dates:</b>	15-Dec-2017 -- 17-Dec-2017	<b>Other Services:</b>	
<b>Log Interval:</b>	736.00(m) -- 931.00(m)	<b>SonicScope</b>	
<b>Index Types:</b>	Measured Depth	<b>proVISION Plus</b>	
<b>Index Scales:</b>	1:240	<b>geoVISION Images</b>	
<b>Depth Source:</b>	Driller's Depth		
<b>Depth Sensor:</b>	DES		
<b>Print Type:</b>	Final		
<b>Spud Date:</b>	16-Dec-2017		

**Disclaimer**

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

**Run 1**

**FINAL GVR LOG 1**

**Software Version**

<b>Acquisition System</b>		<b>Version</b>	
Maxwell 2017 SP3		7.3.92069.3100	
<b>Computation</b>	<b>Description</b>	<b>Version</b>	
RAB6Res	RAB6 Resistivity Computation Package for both Real-time and Recorded Mode	7.3.92069.3100	
RAB6GR	RAB6 Gamma Ray Computation Package for both Real-time and Recorded Mode	7.3.92069.3100	
<b>SoftwareVersion_Tool</b>	<b>SoftwareVersion_System Version</b>	<b>SoftwareVersion_Loaded Version</b>	
HSPM	20.3c.062	7.3.92069.3100	
<b>Tool Elements</b>	<b>Description</b>	<b>Software Version</b>	<b>Firmware Version</b>
DRILLING_SURFACE	DRILLING_SURFACE	7.3.92069.3100	
RBEC	Electronics Chassis Assembly for RAB6-C	7.3.92069.3100	V8.6B


**Pass Summary**


Run Name	Pass Objective	Direction	Top	Bottom	Start	Stop	Include Parallel Data
Run 1	Drilling	Down	682.50 m	940.92 m	15-Dec-2017 9:33:10 PM	17-Dec-2017 9:34:16 AM	Yes


All depths are referenced to toolstring zero


<b>Log</b>	Company: IODP Well: U1517A	
	Run 1: Drilling: S043	

Description: GVR Resistivity Conductivity Format: Log ( FINAL GVR LOG 1 ) Index Scale: 1:240 Index Unit: m Index Type: Measured Depth Creation Date: 29-Dec-2017 20:49:56

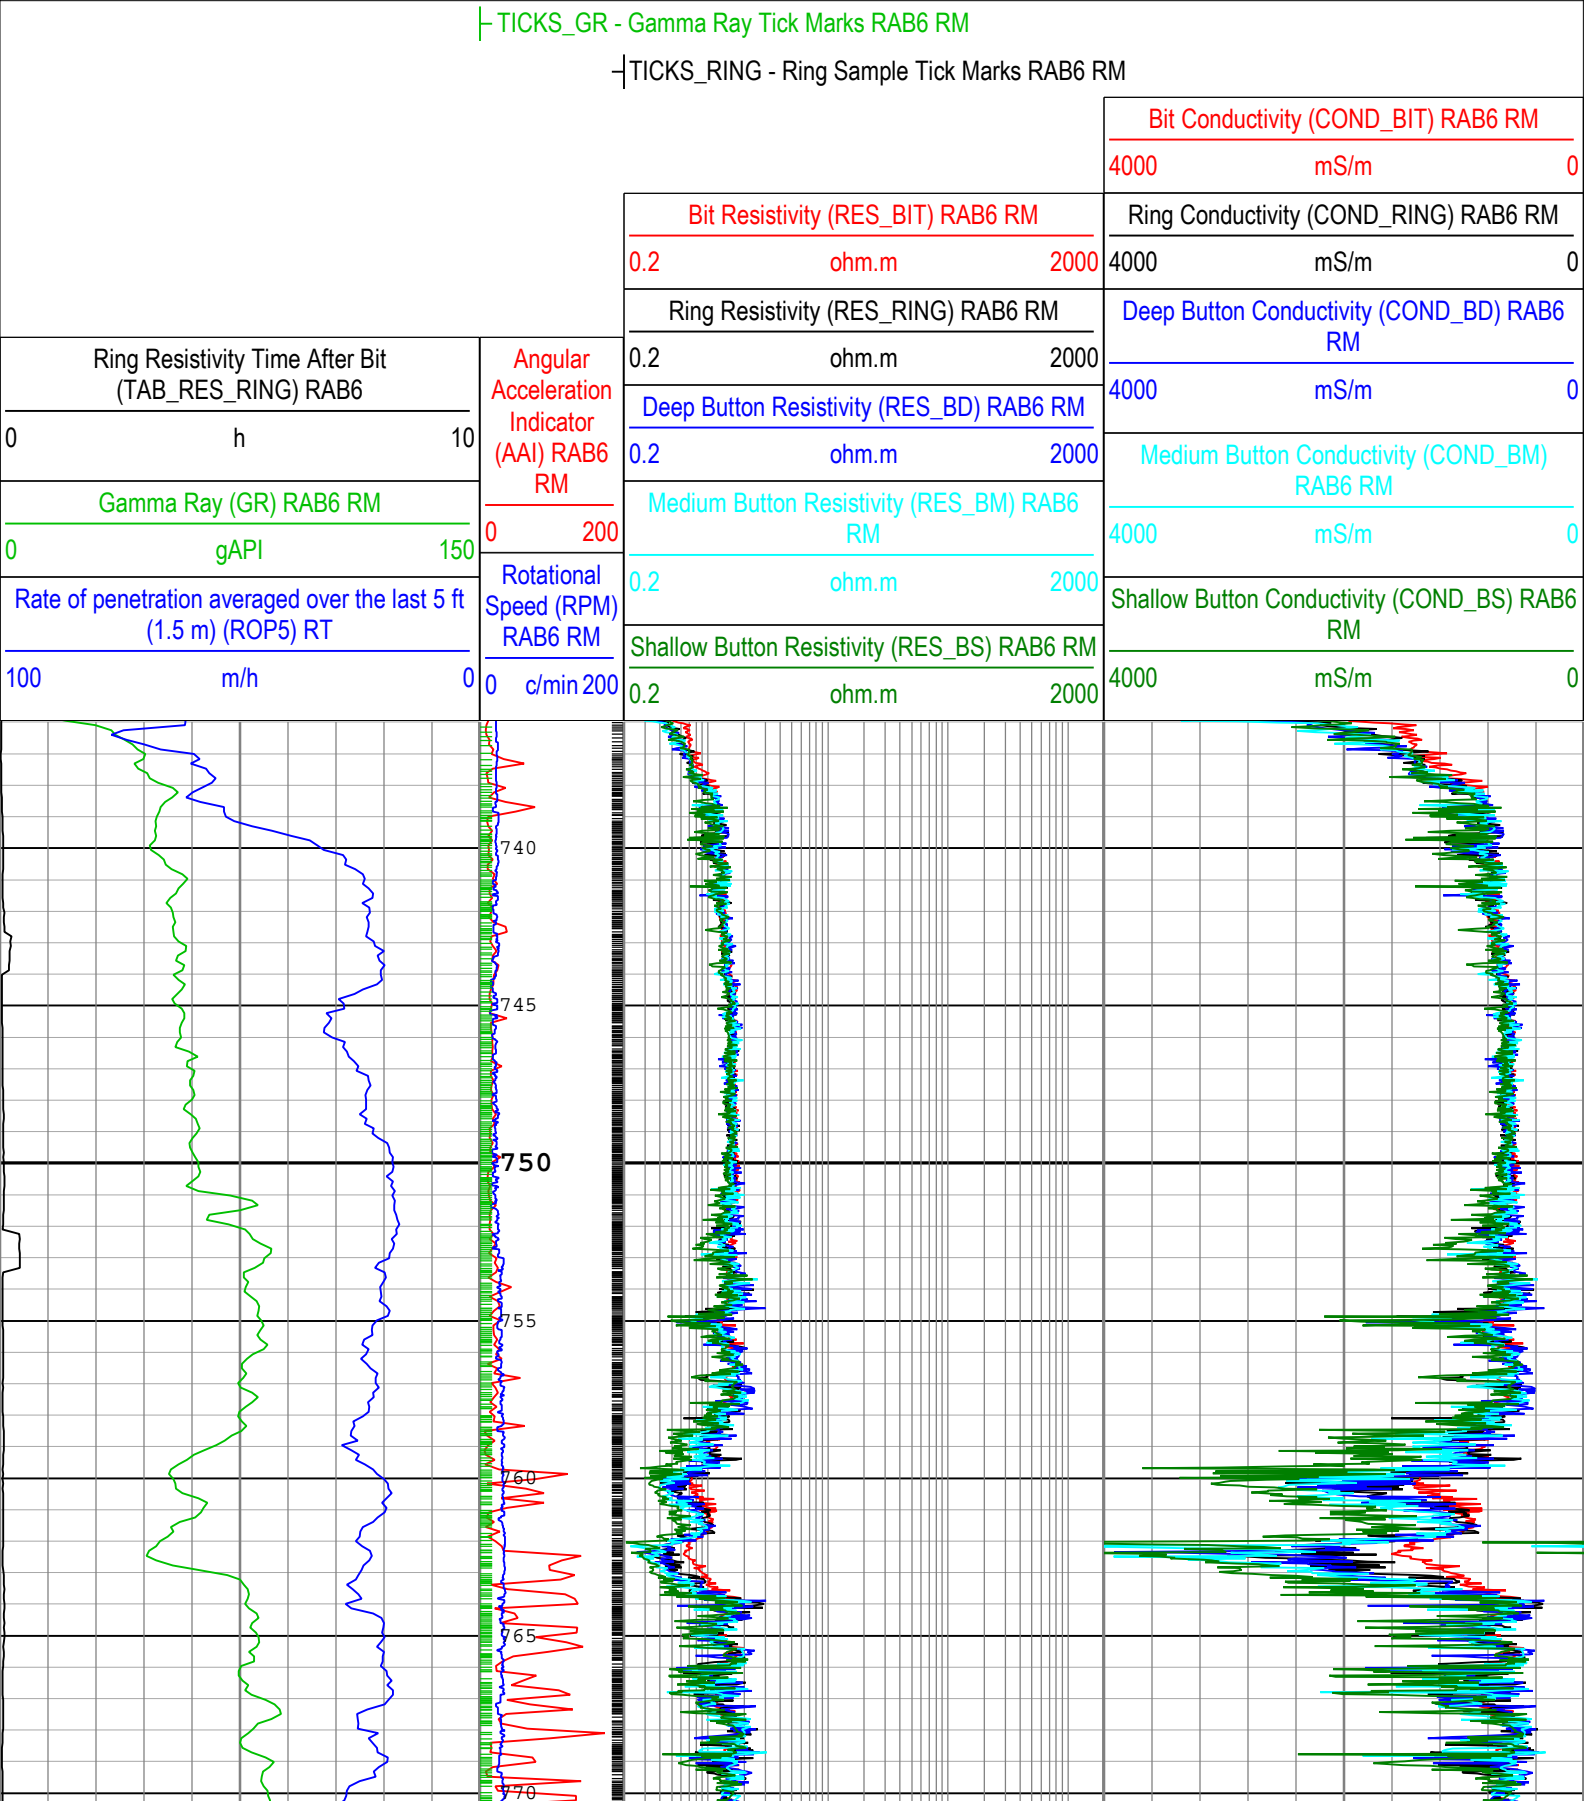

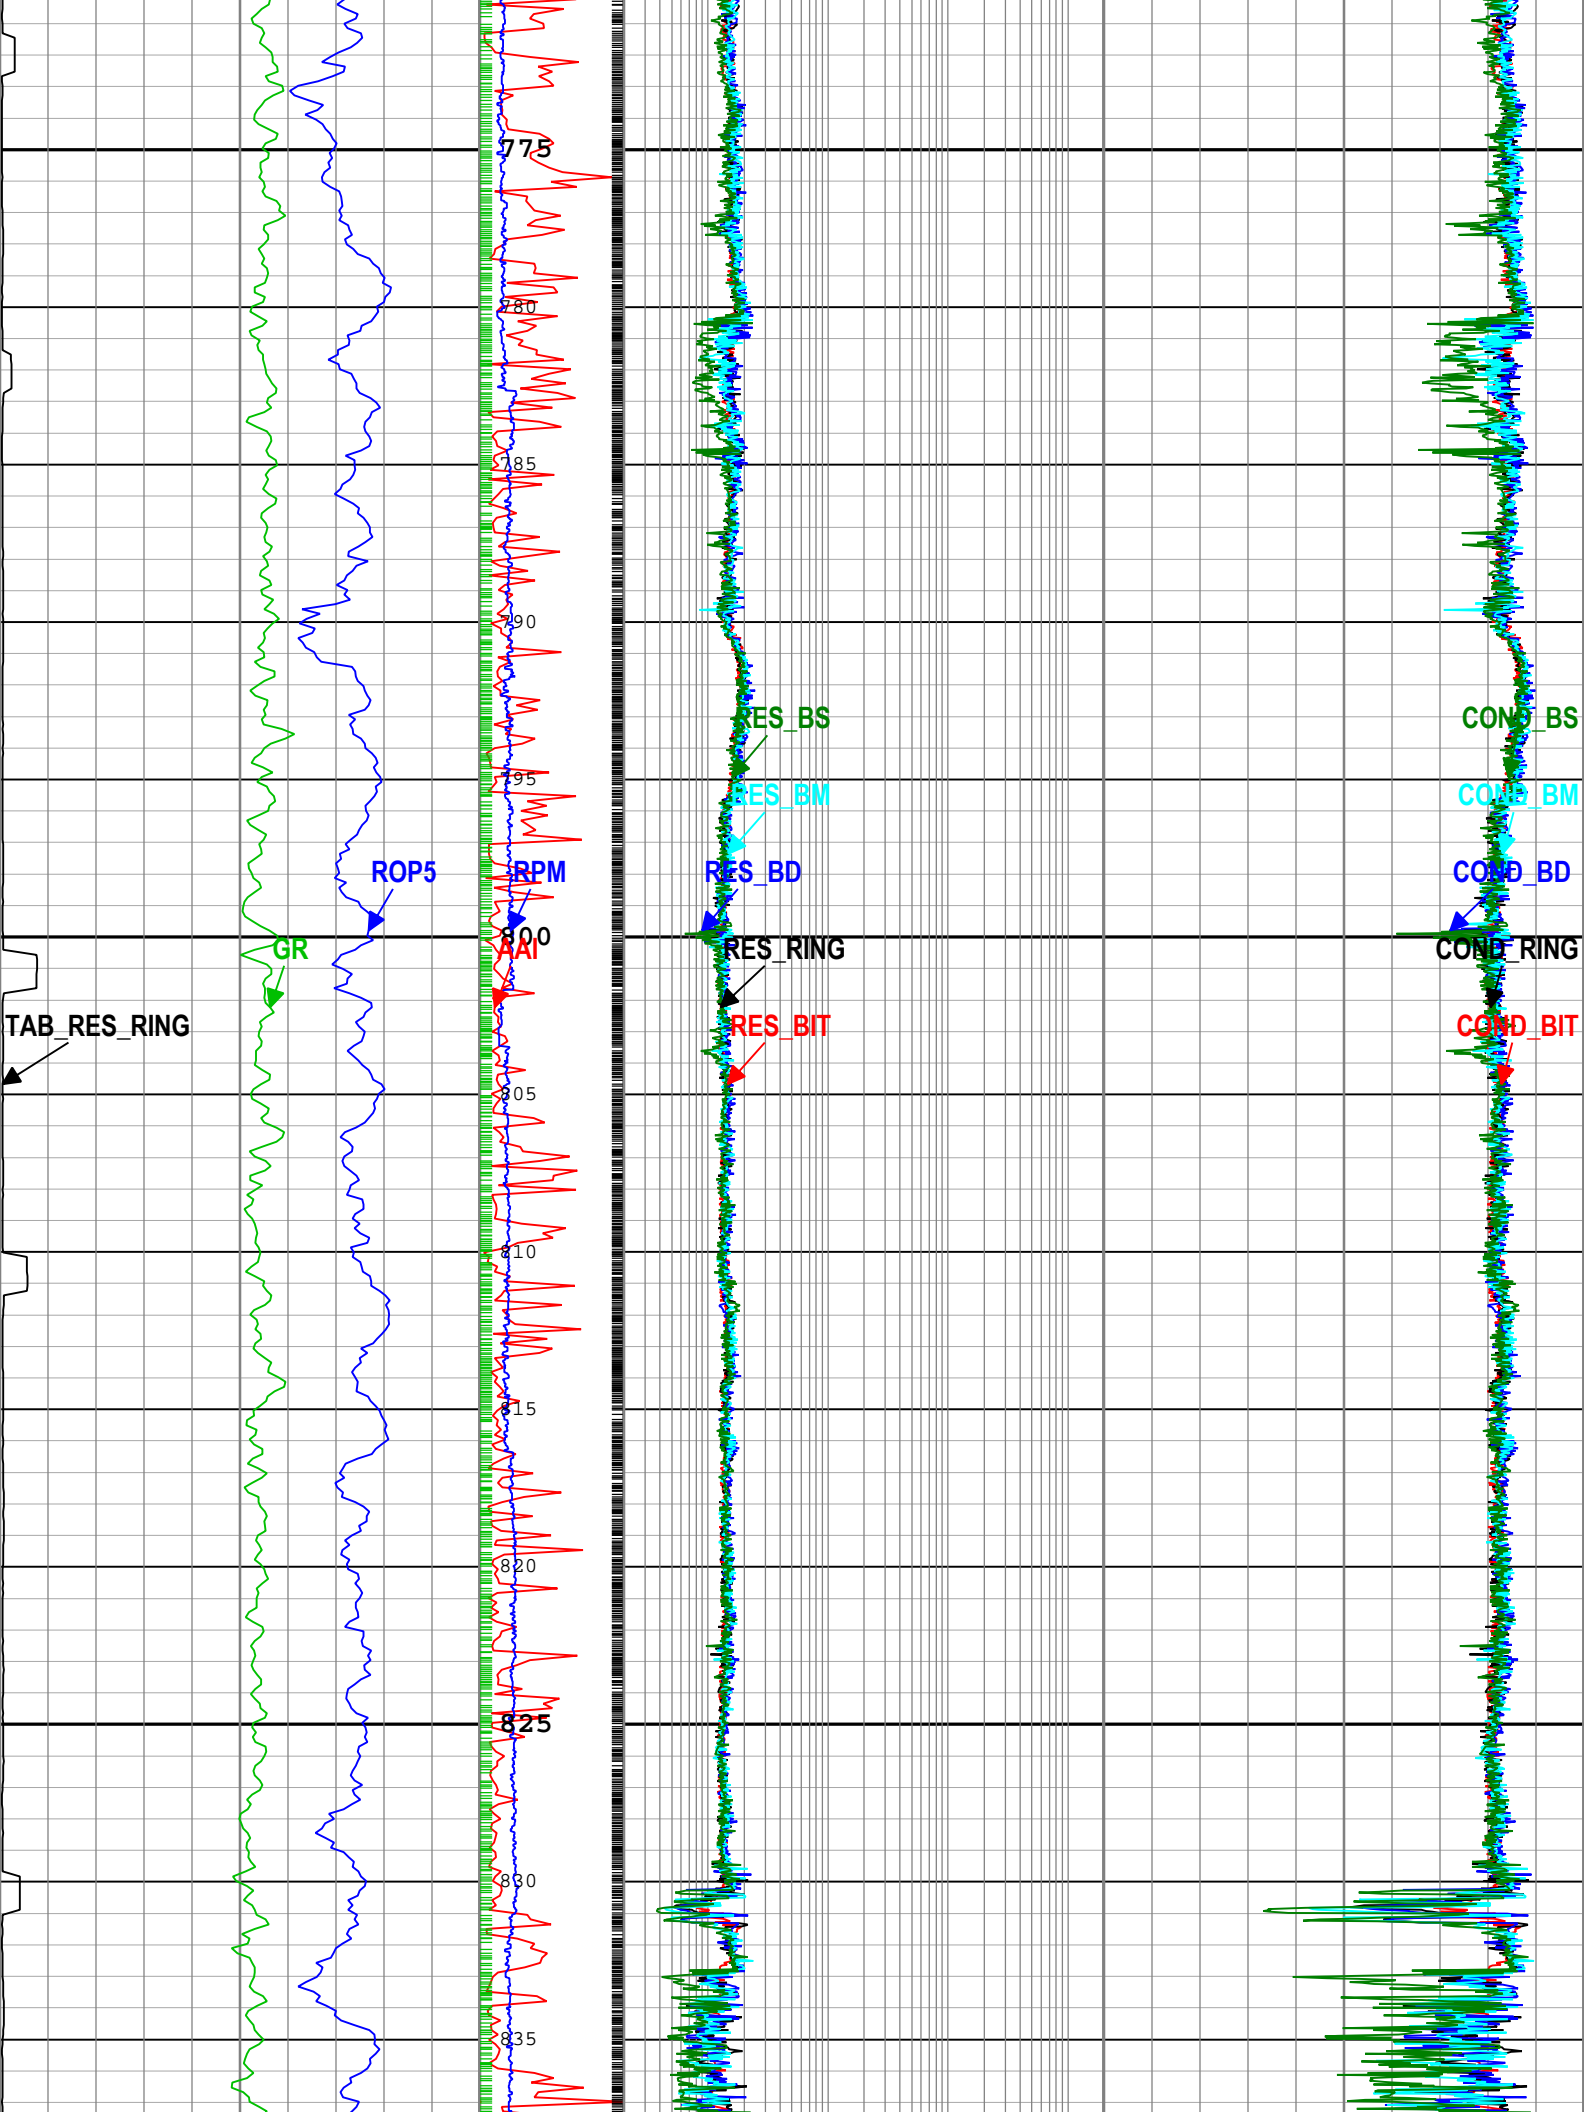

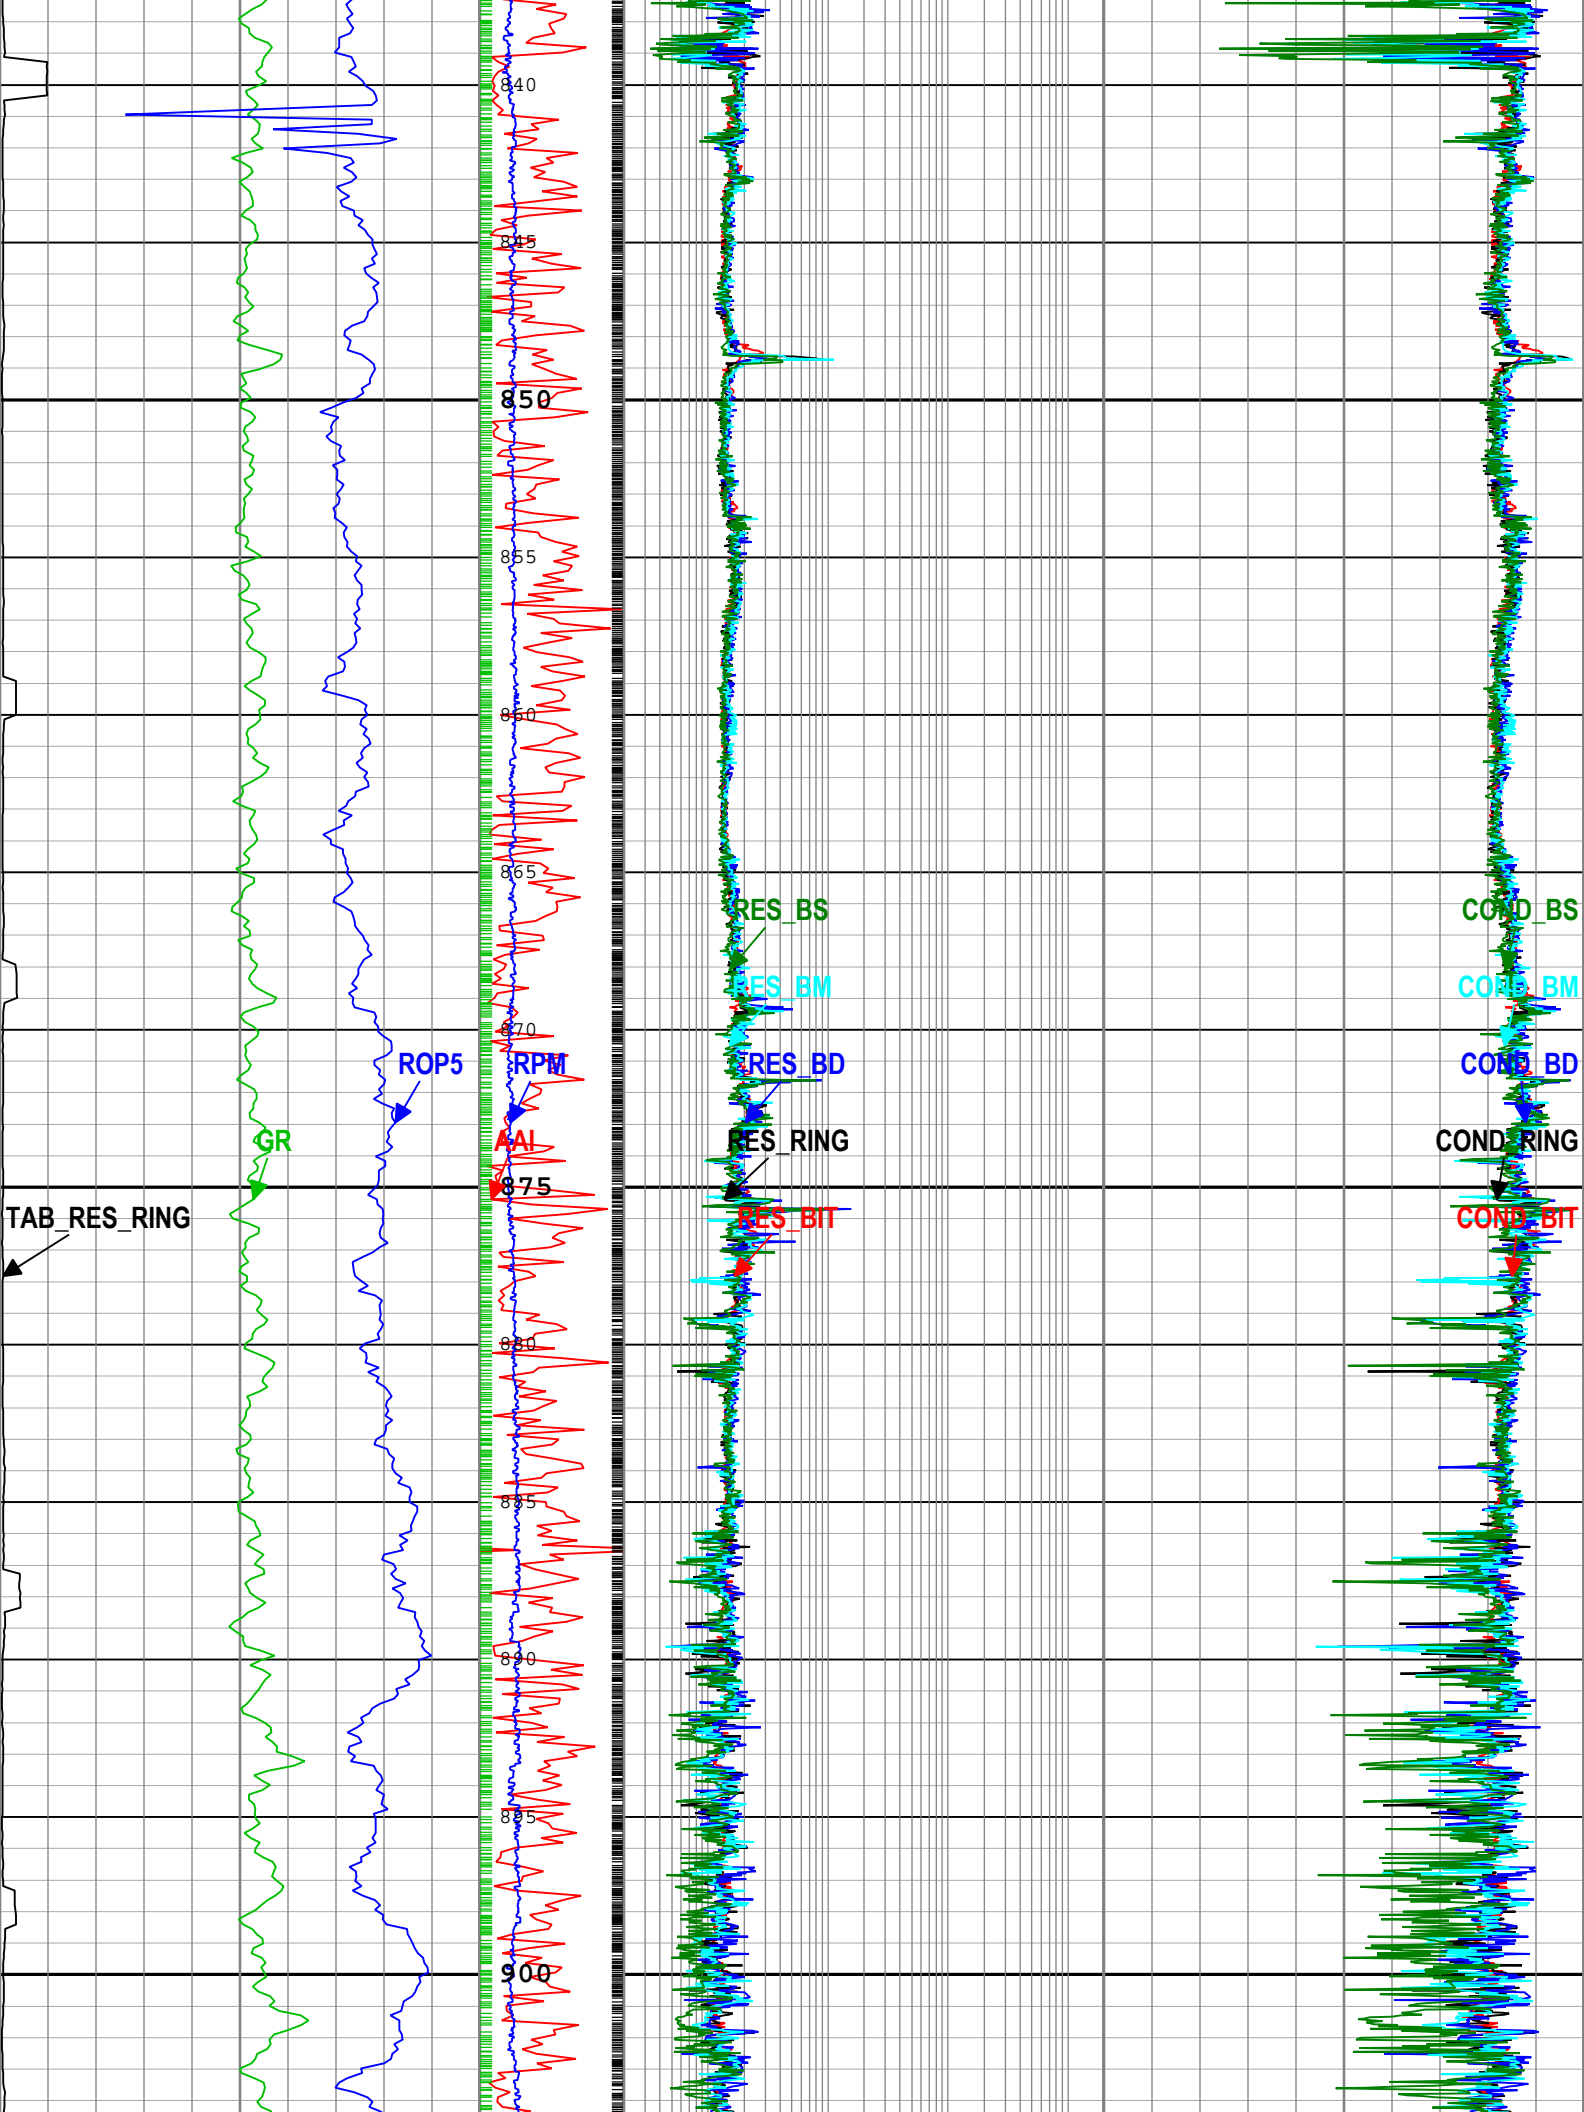

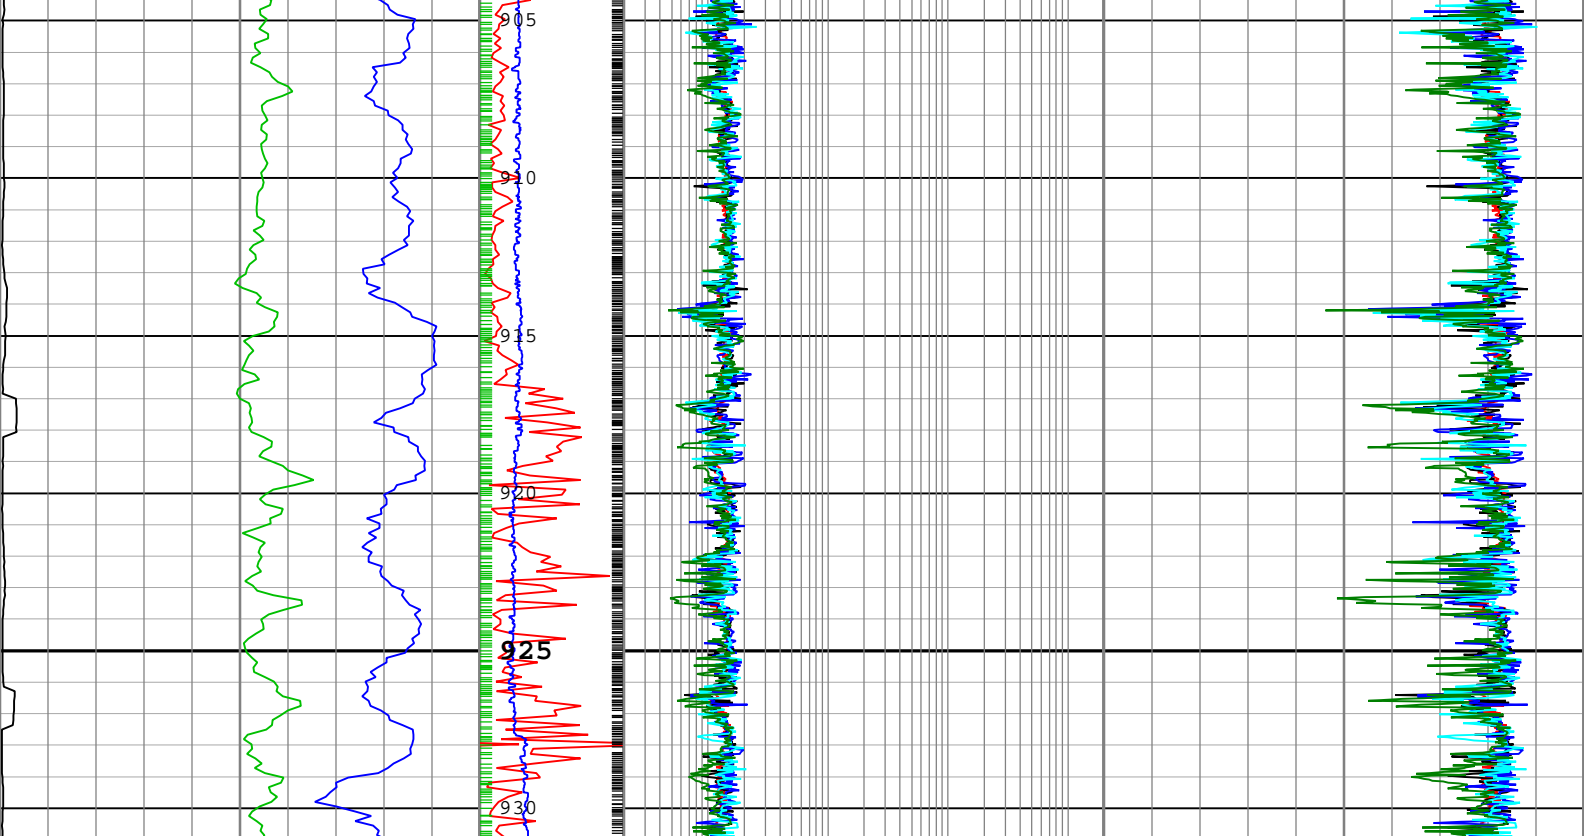

Ring Resistivity Time After Bit (TAB_RES_RING) RAB6 0 h 10	Angular Acceleration Indicator (AAI) RAB6 RM 0 200	Bit Resistivity (RES_BIT) RAB6 RM 0.2 ohm.m 2000	Bit Conductivity (COND_BIT) RAB6 RM 4000 mS/m 0
Gamma Ray (GR) RAB6 RM 0 gAPI 150	Rotational Speed (RPM) RAB6 RM 0 c/min 200	Ring Resistivity (RES_RING) RAB6 RM 0.2 ohm.m 2000	Ring Conductivity (COND_RING) RAB6 RM 4000 mS/m 0
Rate of penetration averaged over the last 5 ft (1.5 m) (ROP5) RT 100 m/h 0		Deep Button Resistivity (RES_BD) RAB6 RM 0.2 ohm.m 2000	Deep Button Conductivity (COND_BD) RAB6 RM 4000 mS/m 0
		Medium Button Resistivity (RES_BM) RAB6 RM 0.2 ohm.m 2000	Medium Button Conductivity (COND_BM) RAB6 RM 4000 mS/m 0
		Shallow Button Resistivity (RES_BS) RAB6 RM 0.2 ohm.m 2000	Shallow Button Conductivity (COND_BS) RAB6 RM 4000 mS/m 0

┆ TICKS\_RING - Ring Sample Tick Marks RAB6 RM

┆ TICKS\_GR - Gamma Ray Tick Marks RAB6 RM

Description: GVR Resistivity Conductivity Format: Log ( FINAL GVR LOG 1 ) Index Scale: 1:240 Index Unit: m Index Type: Measured Depth Creation Date: 29-Dec-2017 20:49:56

## Channel Processing Parameters

### Run 1: Parameters


Parameter	Description	Tool	Value	Unit
BHK	Drilling Fluid Potassium Concentration	Borehole	0	%
BHT	Bottom Hole Temperature	Borehole	11	degC
BS	Bit Size	DNMSESSION	8.5	in
DFD	Drilling Fluid Density	Borehole	1.03	g/cm3
DFT_CATEGORY	Drilling Fluid Type	Borehole	Water	
GRSE_RM	Generalized Mud Resistivity Selection for Recorded Mode	Borehole	REMS(RM)	
GTSE_RM	Generalized Temperature Selection for Recorded Mode	Borehole	DHAT(RM)	
MST	Mud Sample Temperature	Borehole	23.89	degC

RMS	Resistivity of Mud Sample	Borehole	0.2	ohm.m
TEMP_SEL_RAB	RAB Temperature Selection	RAB6	Tool	

**Tool Control Parameters**

**Company:** IODP  
**Well:** U1517A  
**Field:** TLC-04B  
**Rig Name:** Joides Resolution  
**Expedition:** 372  
**Country:** New Zealand




**geoVISION Resistivity**  
**1:240 Measured Depth**  
**Recorded Mode Data**