

Company: Lamont Doherty
Well: ODP Leg 204, Site 1252A
Field: Hydrate Ridge
Ocean: Pacific
State: Oregon

Ocean: Pacific
Field: Hydrate Ridge
Location: W 125* 5.5684'
Well: ODP Leg 204, Site 1252A
Company: Lamont Doherty

Phasor Induction			
HLDT/APS Porosity			
Natural Gamma Ray (Tcombo)			
W 125* 5.5684'	Elev.: K.B. 11.3 m		
N 44* 35.1658'	G.L. -1051 m		
	D.F. 11 m		
Permanent Datum: _____	MSL _____		
Log Measured From: _____	RKB _____		
Drilling Measured From: _____	RKB _____		
API Serial No. _____	Max. Hole Devi. _____	Longitude _____	Latitude _____
		Elev.: 0 m	
		11.3 m above Perm. Datum	

Logging Date	31-Aug-2002		
Run Number	1		
Depth Driller	1311 m		
Schlumberger Depth	1311 m		
Bottom Log Interval	1305 m		
Top Log Interval	1051 m		
Casing Driller Size @ Depth	0.000 in @ 1126 m		
Casing Schlumberger	1125 m		
Bit Size	11.438 in		
Type Fluid In Hole	Sepiolite Salt Water Base		

MUD		Density	Viscosity	1.1 g/cm3	
Fluid Loss		PH			
Source Of Sample		Mud Pit			
RM @ Measured Temperature		0.322 ohm.m	@	27 degC	
RMF @ Measured Temperature		@	@		
RMC @ Measured Temperature		@	@		
Source RMF	RMC				
RM @ MRT	RMF @ MRT	0.428 @ 15	@	15	@
Maximum Recorded Temperatures		15 degC			
Circulation Stopped	Time	31-Aug-2002		3:00	
Logger On Bottom	Time	31-Aug-2002		7:00	
Unit Number	Location	99	Houston-ODP		
Recorded By		K. Swain			
Witnessed By		G. Guerin, S. Barr, T. Collett			

Logging Date	31-Aug-2002		
Run Number	1		
Depth Driller	1311 m		
Schlumberger Depth	1311 m		
Bottom Log Interval	1305 m		
Top Log Interval	1051 m		
Casing Driller Size @ Depth	0.000 in @ 1126 m		
Casing Schlumberger	1125 m		
Bit Size	11.438 in		
Type Fluid In Hole	Sepiolite Salt Water Base		
MUD		Density	Viscosity
Fluid Loss		PH	
Source Of Sample		Mud Pit	
RM @ Measured Temperature		0.322 ohm.m	@ 27 degC
RMF @ Measured Temperature		@	@
RMC @ Measured Temperature		@	@
Source RMF	RMC		
RM @ MRT	RMF @ MRT	0.428 @ 15	@ 15
Maximum Recorded Temperatures		15 degC	
Circulation Stopped	Time	31-Aug-2002	3:00
Logger On Bottom	Time	31-Aug-2002	7:00
Unit Number	Location	99	Houston-ODP
Recorded By		K. Swain	
Witnessed By		G. Guerin, S. Barr, T. Collett	

Logging Date	31-Aug-2002		
Run Number	1		
Depth Driller	1311 m		
Schlumberger Depth	1311 m		
Bottom Log Interval	1305 m		
Top Log Interval	1051 m		
Casing Driller Size @ Depth	0.000 in @ 1126 m		
Casing Schlumberger	1125 m		
Bit Size	11.438 in		
Type Fluid In Hole	Sepiolite Salt Water Base		
MUD		Density	Viscosity
Fluid Loss		PH	
Source Of Sample		Mud Pit	
RM @ Measured Temperature		0.322 ohm.m	@ 27 degC
RMF @ Measured Temperature		@	@
RMC @ Measured Temperature		@	@
Source RMF	RMC		
RM @ MRT	RMF @ MRT	0.428 @ 15	@ 15
Maximum Recorded Temperatures		15 degC	
Circulation Stopped	Time	31-Aug-2002	3:00
Logger On Bottom	Time	31-Aug-2002	7:00
Unit Number	Location	99	Houston-ODP
Recorded By		K. Swain	
Witnessed By		G. Guerin, S. Barr, T. Collett	

DISCLAIMER

THE USE OF AND RELIANCE UPON THIS RECORDED-DATA BY THE HEREIN NAMED COMPANY (AND ANY OF ITS AFFILIATES, PARTNERS, REPRESENTATIVES, AGENTS, CONSULTANTS AND EMPLOYEES) IS SUBJECT TO THE TERMS AND CONDITIONS AGREED UPON BETWEEN SCHLUMBERGER AND THE COMPANY, INCLUDING: (a) RESTRICTIONS ON USE OF THE RECORDED-DATA; (b) DISCLAIMERS AND WAIVERS OF WARRANTIES AND REPRESENTATIONS REGARDING COMPANY'S USE OF AND RELIANCE UPON THE RECORDED-DATA; AND (c) CUSTOMER'S FULL AND SOLE RESPONSIBILITY FOR ANY INFERENCE DRAWN OR DECISION MADE IN CONNECTION WITH THE USE OF THIS RECORDED-DATA.

OTHER SERVICES1
OS1: FMS/DSST
OS2:
OS3: IPLT/DITE
OS4:
OS5:

OTHER SERVICES2
OS1:
OS2:
OS3:
OS4:
OS5:

REMARKS: RUN NUMBER 1
All depths measured in meters below rig floor.

REMARKS: RUN NUMBER 2

Sea Floor SLB 1051 mbrf.
Drill pipe SLB 1125 mbrf.

RUN 1
SERVICE ORDER #:
PROGRAM VERSION: 10C0-306
FLUID LEVEL:

RUN 2
SERVICE ORDER #:
PROGRAM VERSION:
FLUID LEVEL:

LOGGED INTERVAL	START	STOP

LOGGED INTERVAL	START	STOP

EQUIPMENT DESCRIPTION


RUN 1

RUN 2


SURFACE EQUIPMENT

SFT-281 24
SFT-178 4722
GSR-U 135
WITM (DTS)-A

DOWNHOLE EQUIPMENT

LEH-QT		33.47
LEH-QT 1497		
DTC-H	CTEM	32.30
ECH-KC 9841	TelStatus	32.58
	ToolStatu	31.66
HNGS-BA	Upper_1	30.96
HNGS-BA 77	Lower_2	31.66

MNSH-BA 79

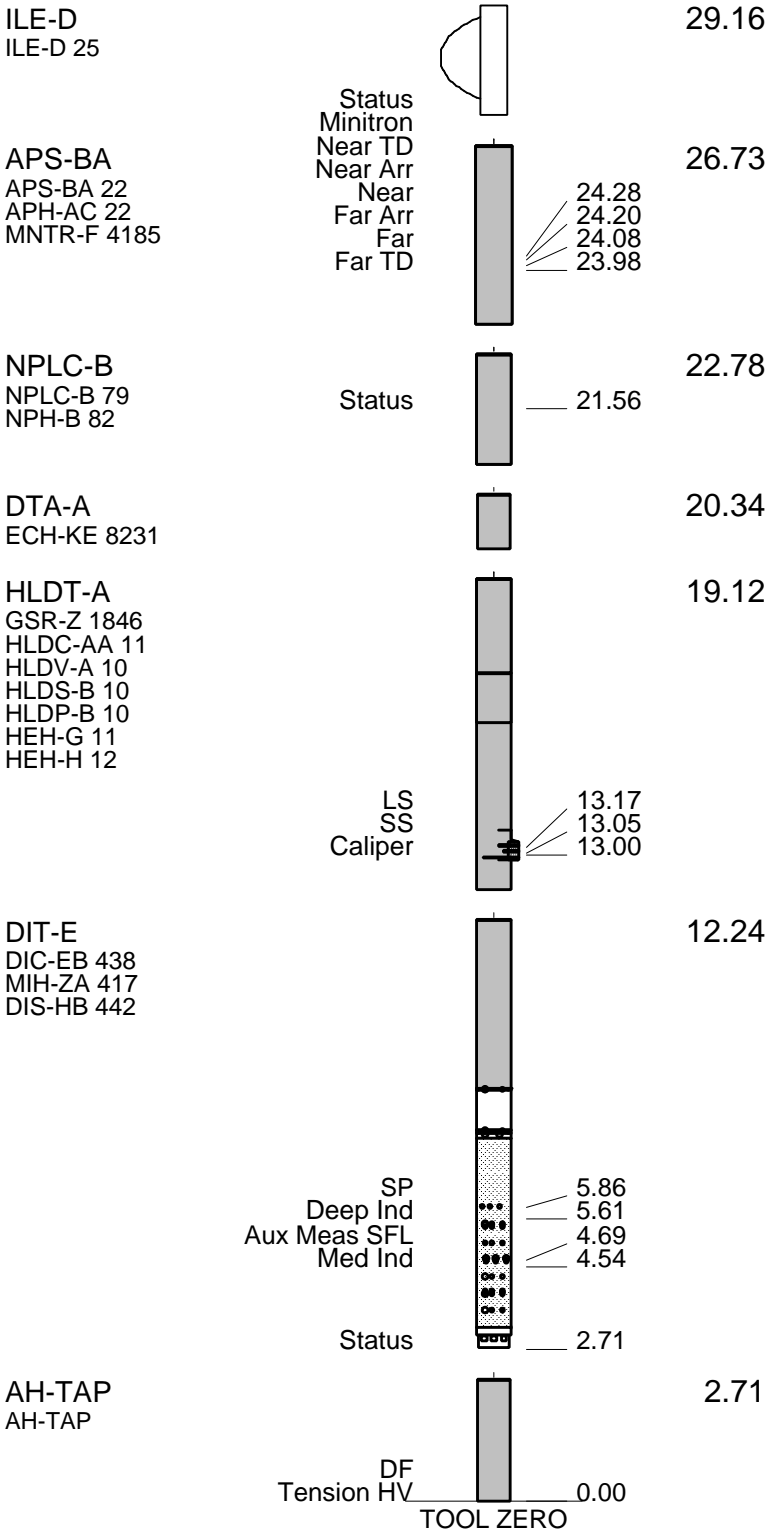

MAXIMUM STRING DIAMETER 3.88 IN
 MEASUREMENTS RELATIVE TO TOOL ZERO
 ALL LENGTHS IN METERS

Output DLIS Files


DEFAULT	PI_LDL_APS_NGS_004LUP	FN:6	PRODUCER	31-Aug-2002 06:56	1312.2 M	1031.9 M
REDUCE	PI_LDL_APS_NGS_004LUP	FN:7	PRODUCER	31-Aug-2002 06:56	1312.2 M	1031.8 M


OP System Version: 10C0-306 MCM


DIT-E	10C0-306	HLDT-A	10C0-306
DTA-A	10C0-306	NPLC-B	OP10-KP1
APS-BA	OP10-KP1	HNGS-BA	OP10-KP1
DTC-H	10C0-306		


PIP SUMMARY

Time Mark Every 60 S

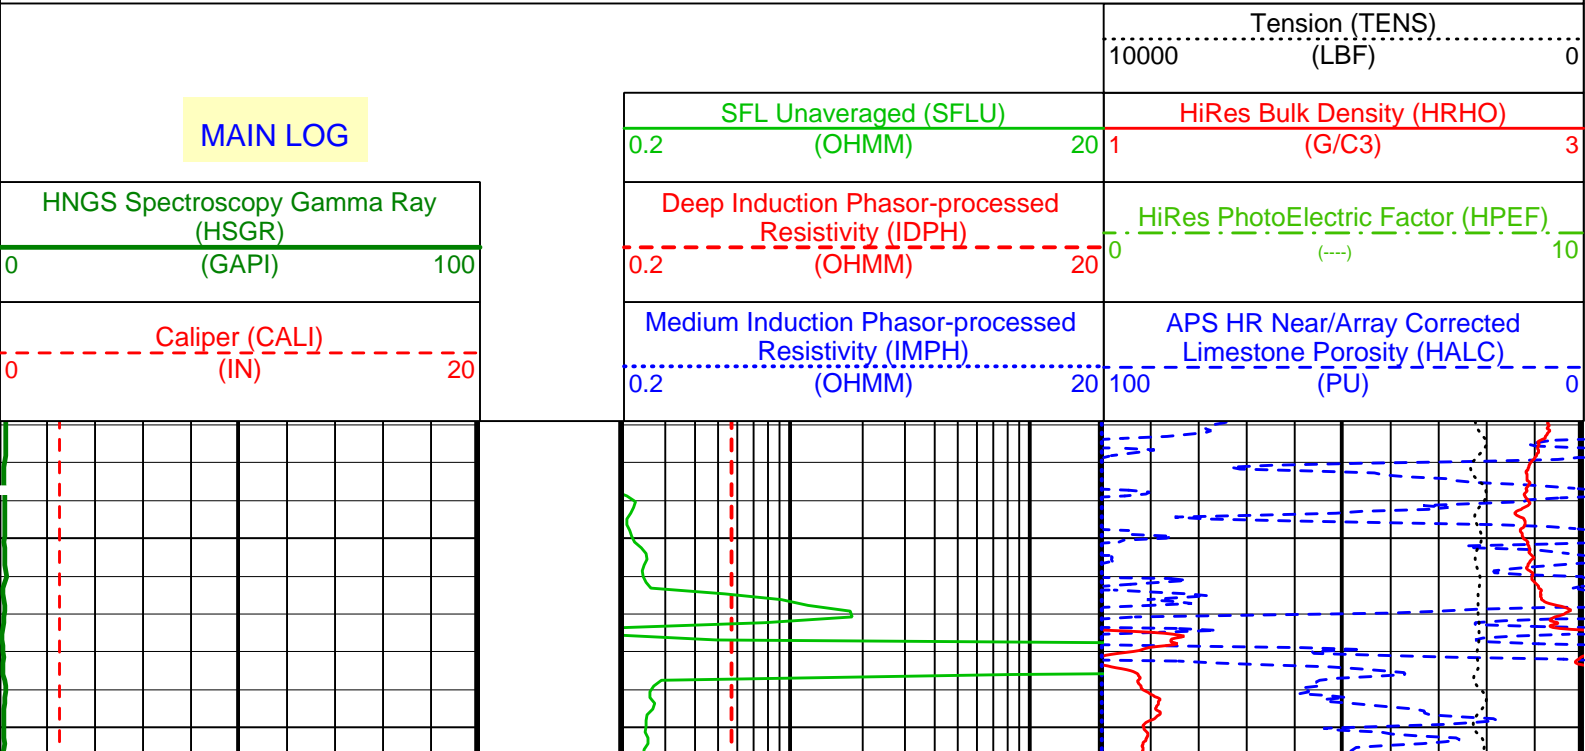


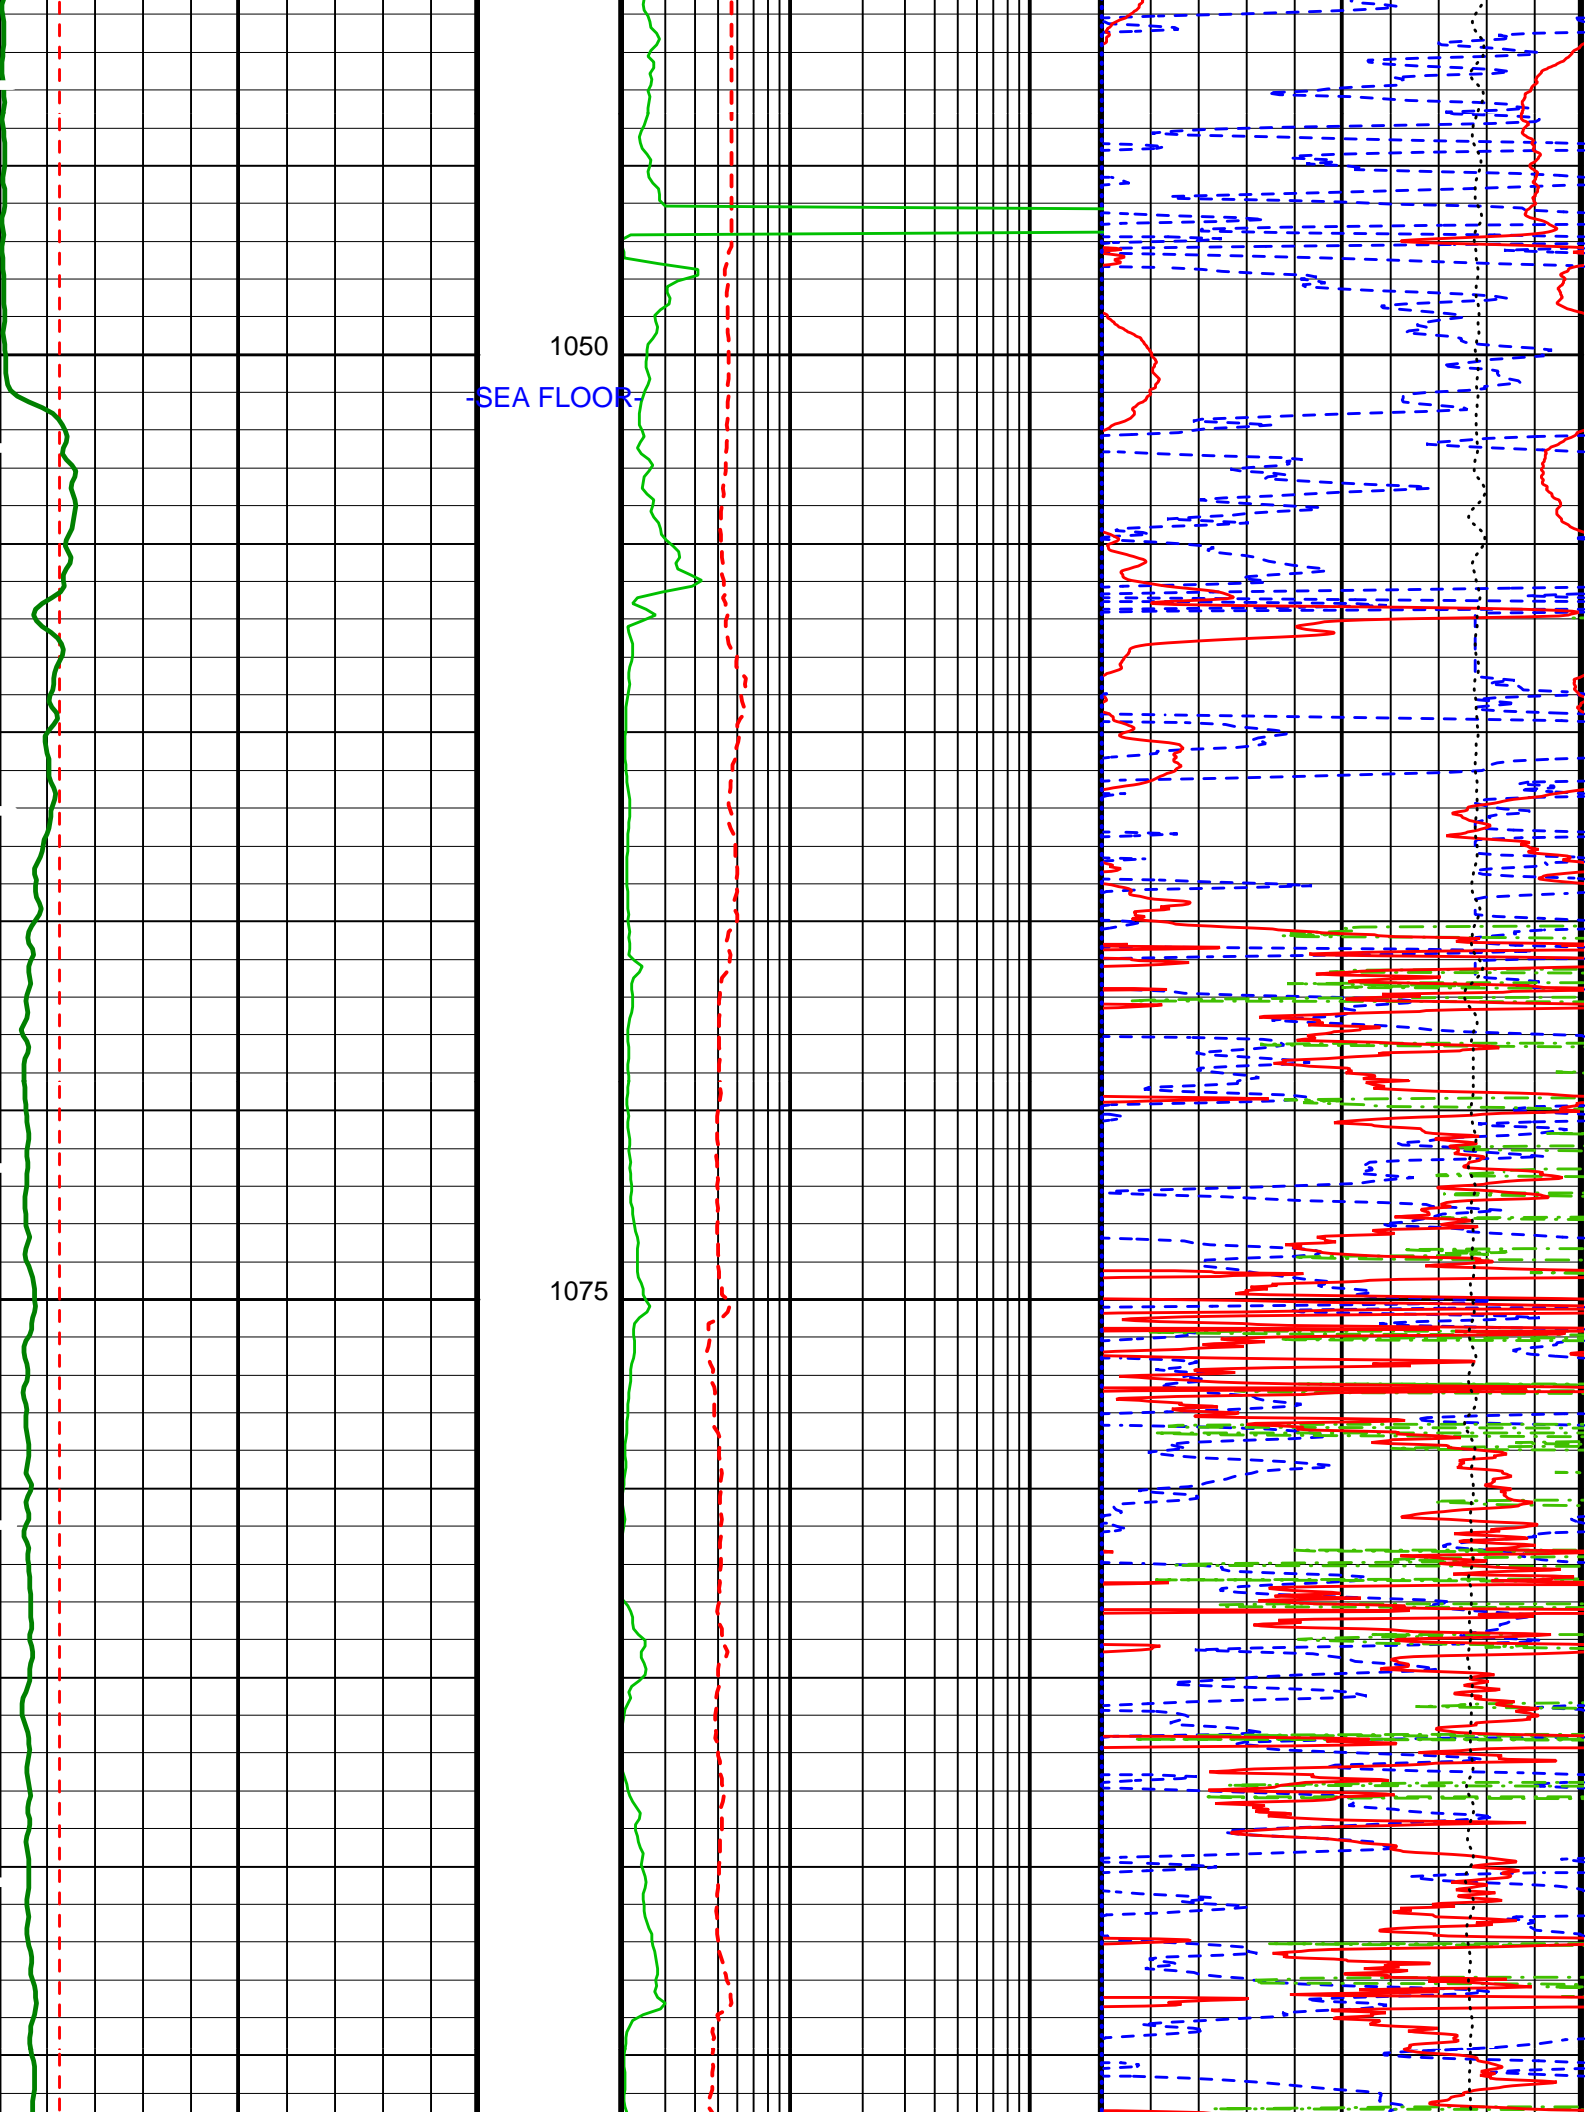


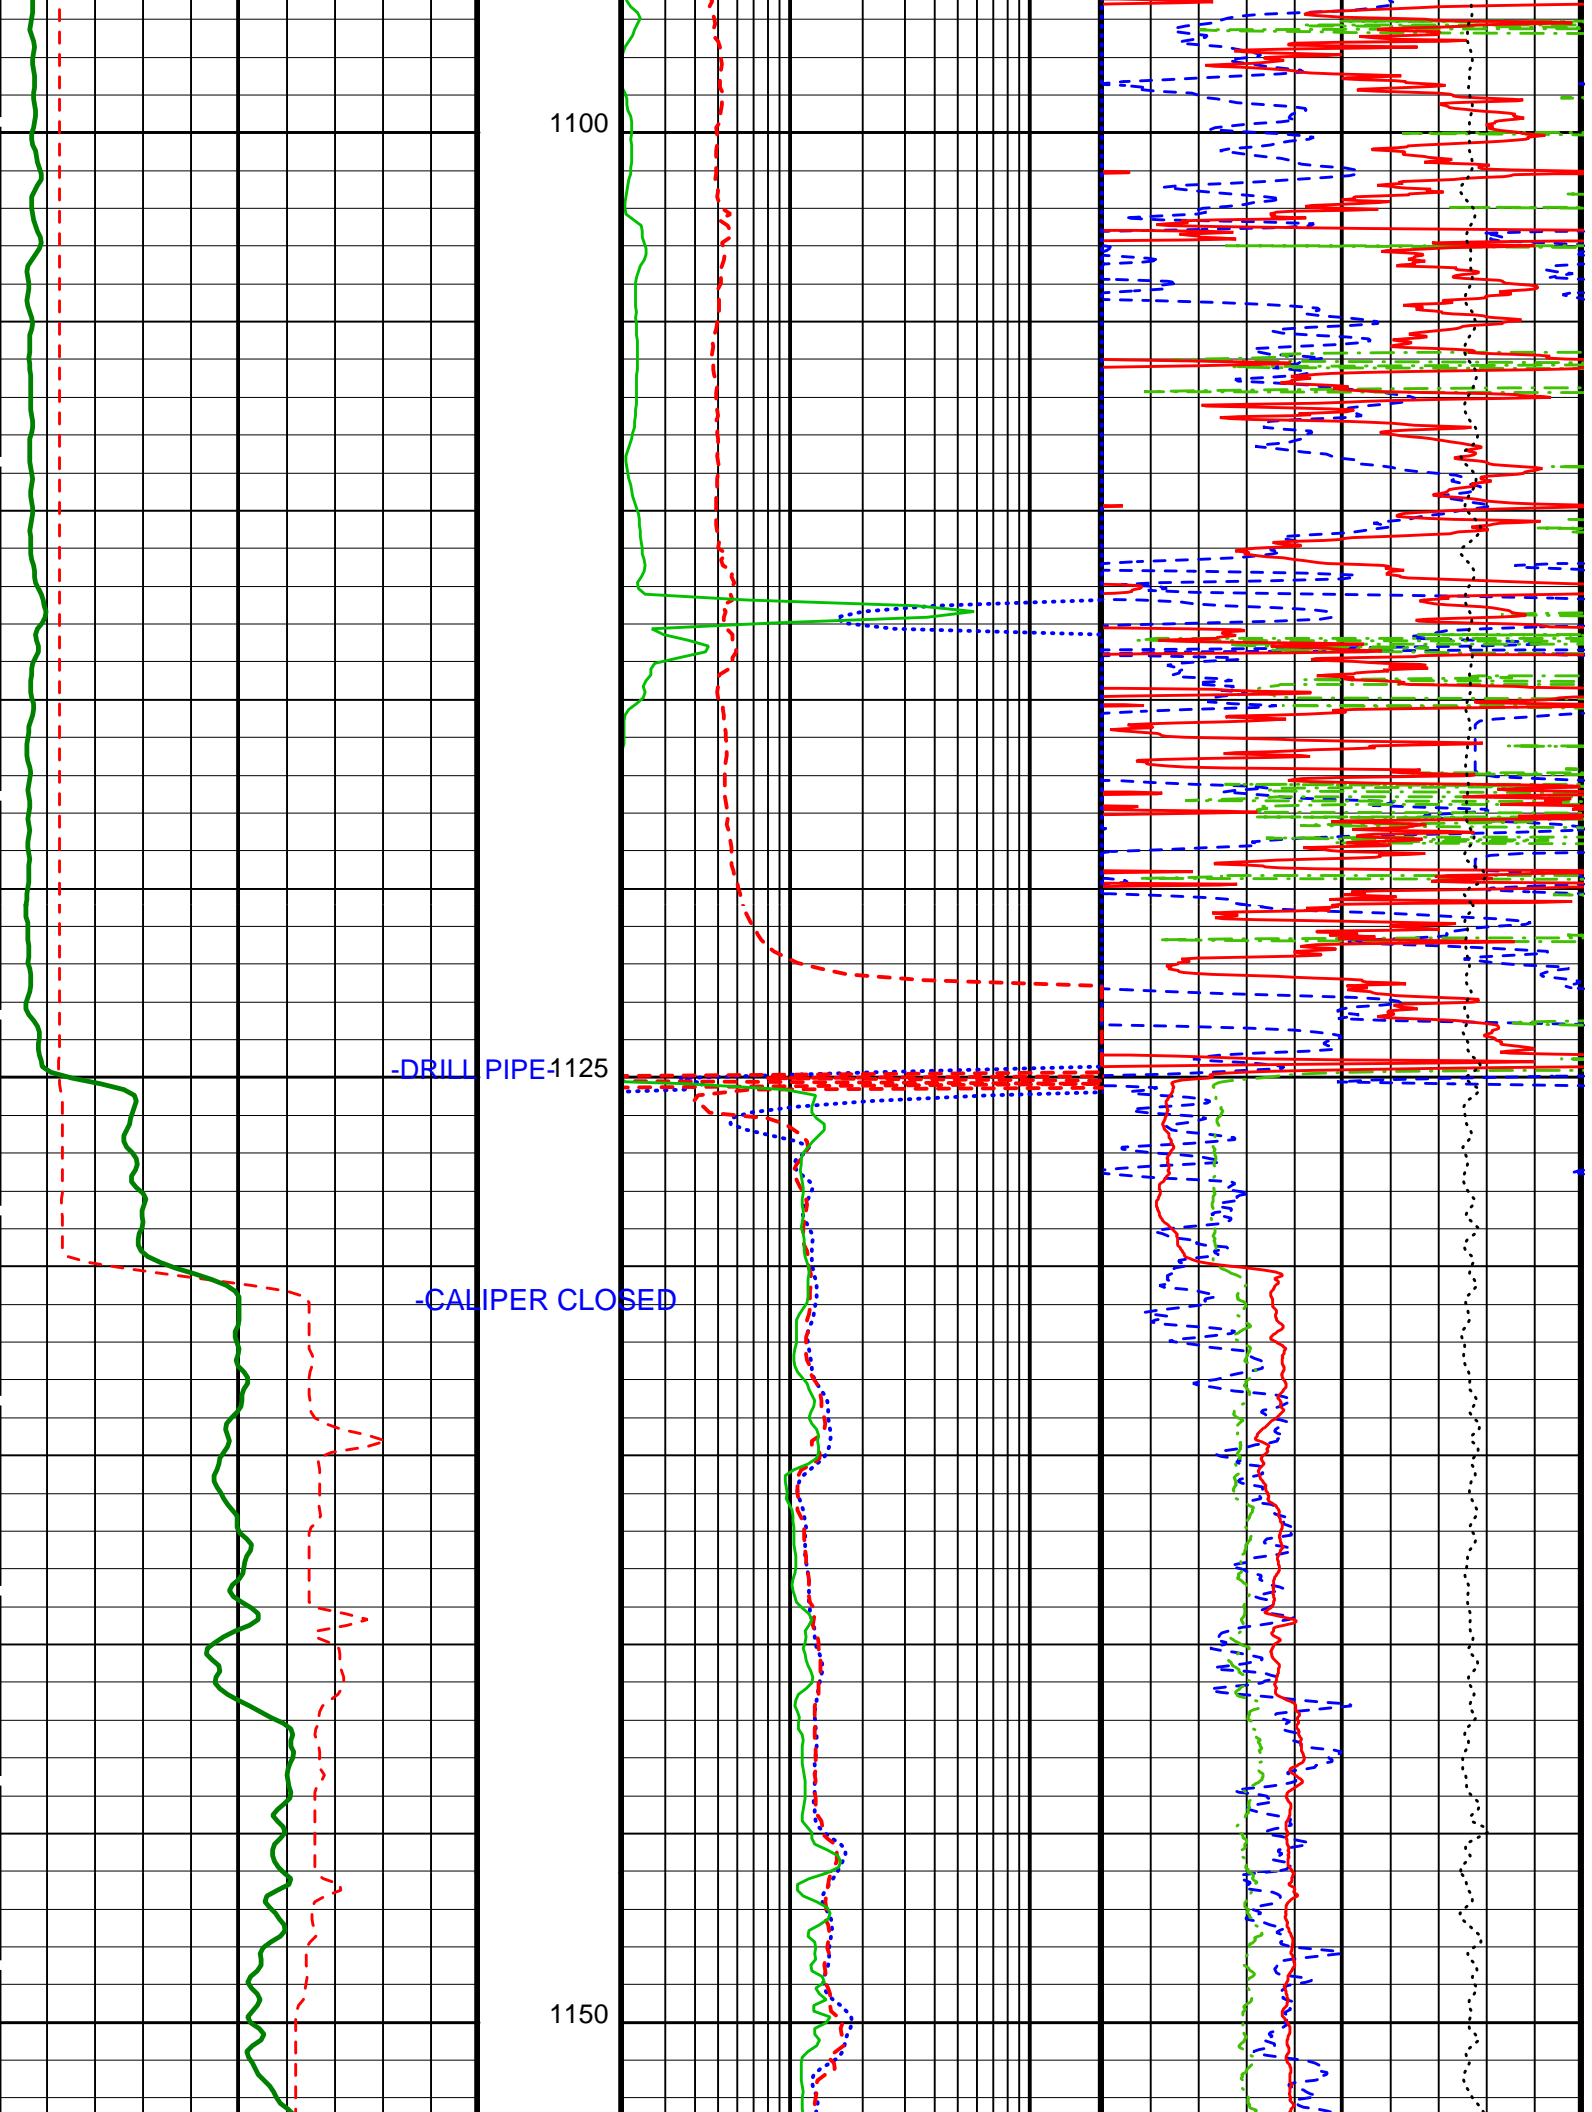


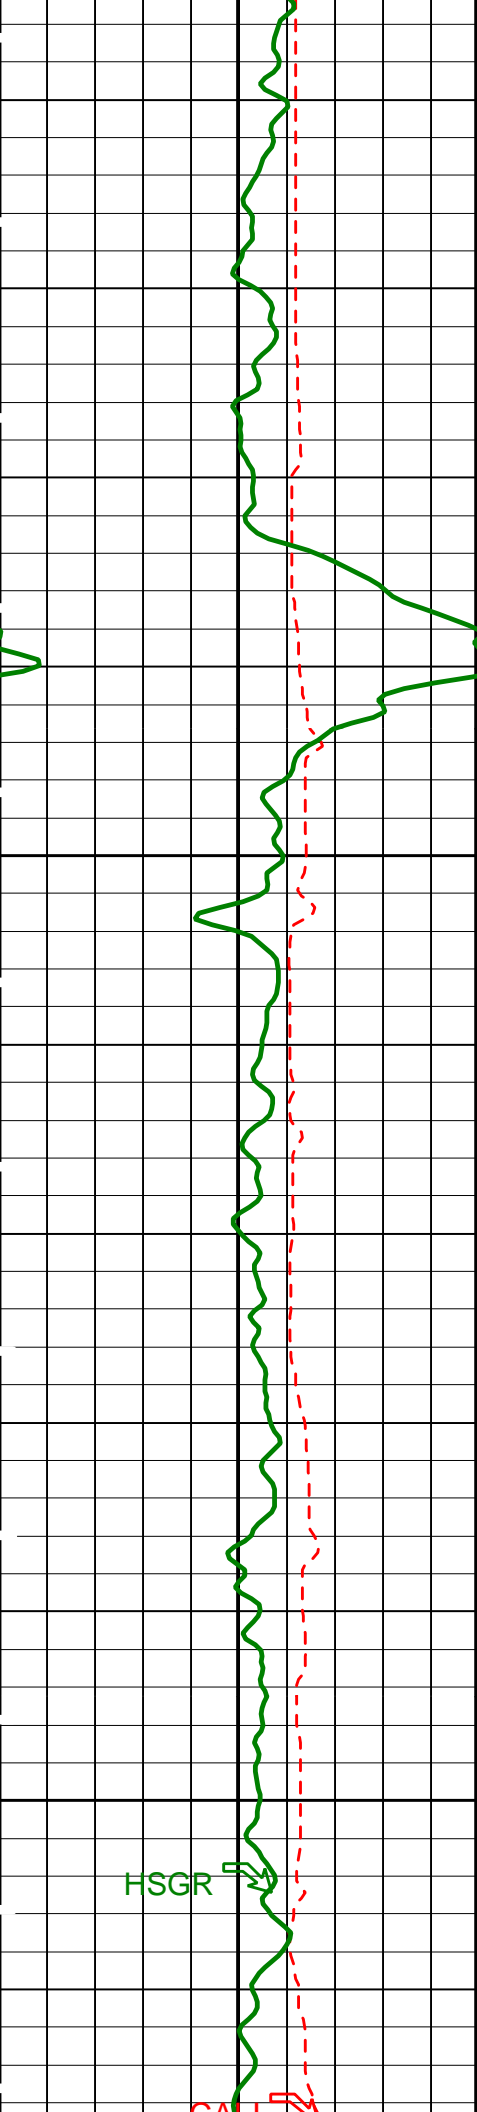

1175



1200

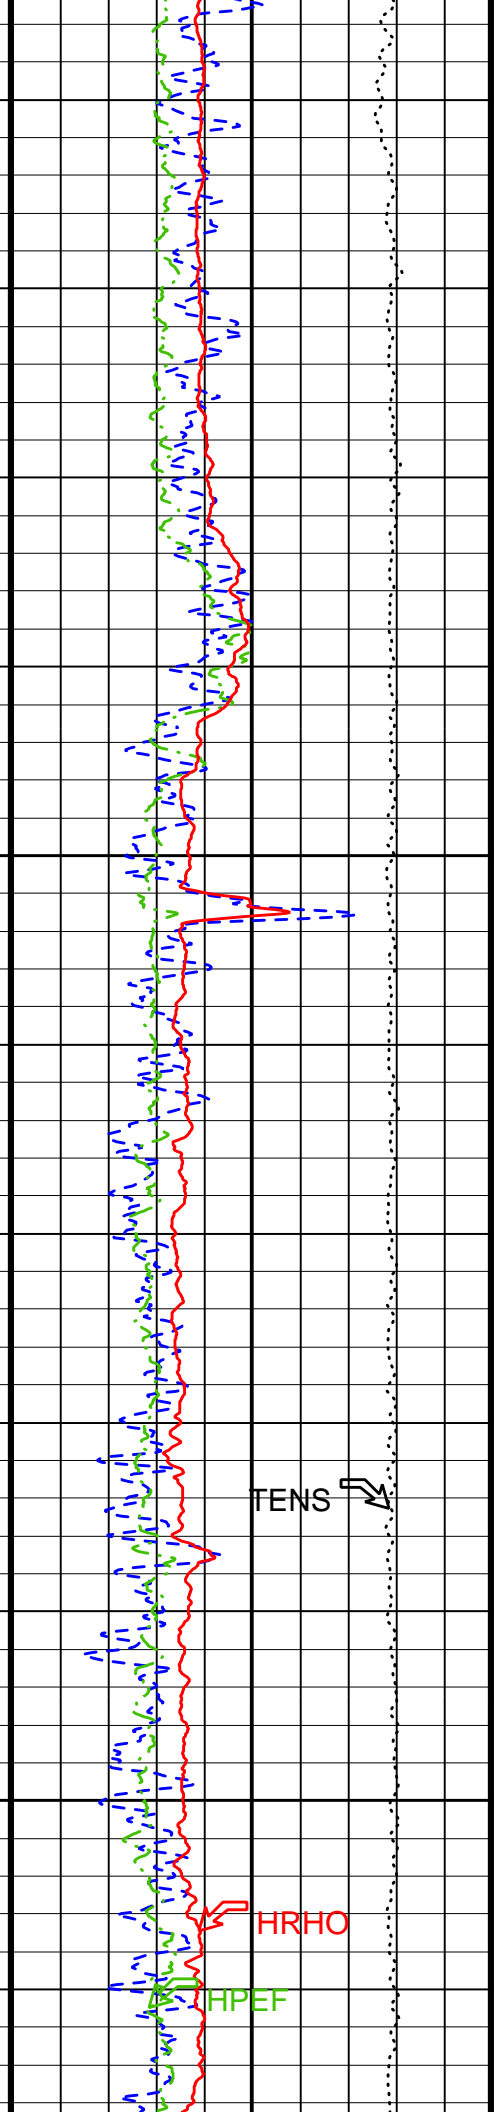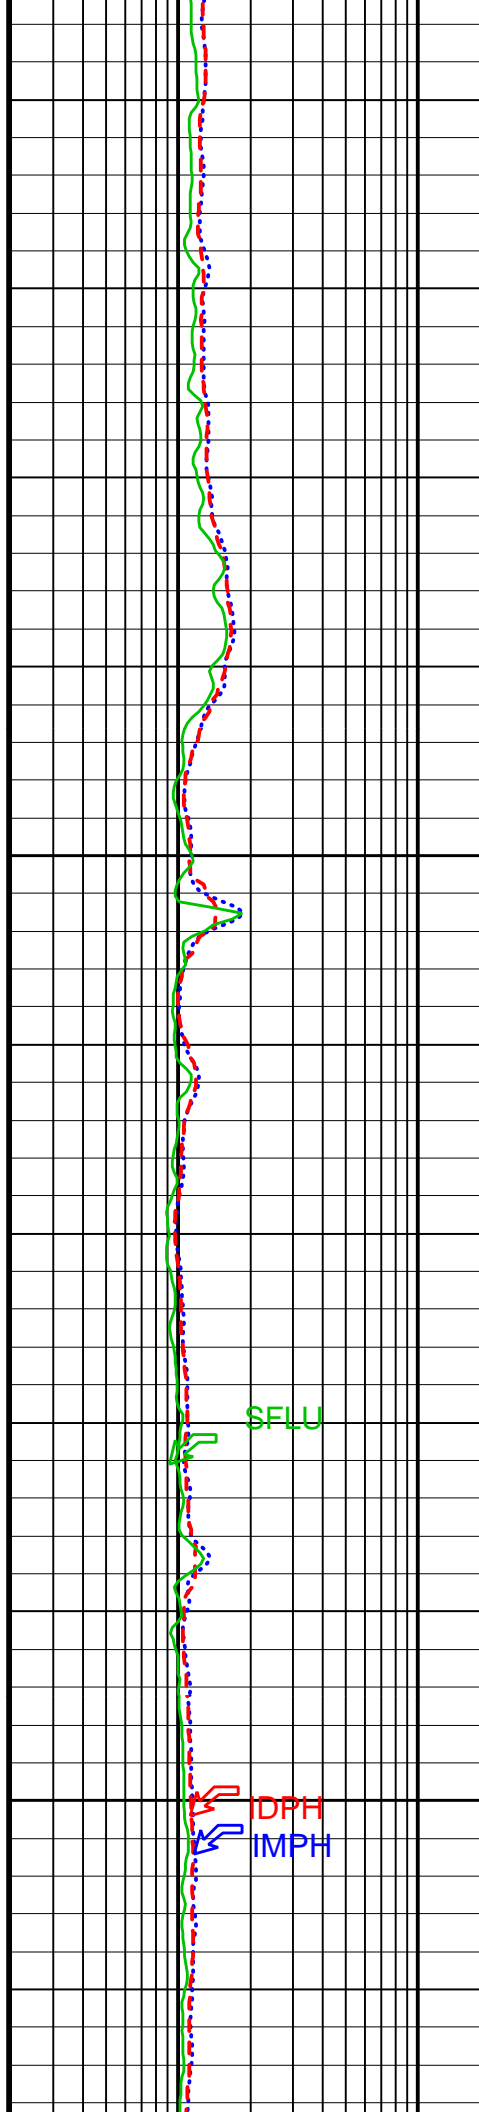


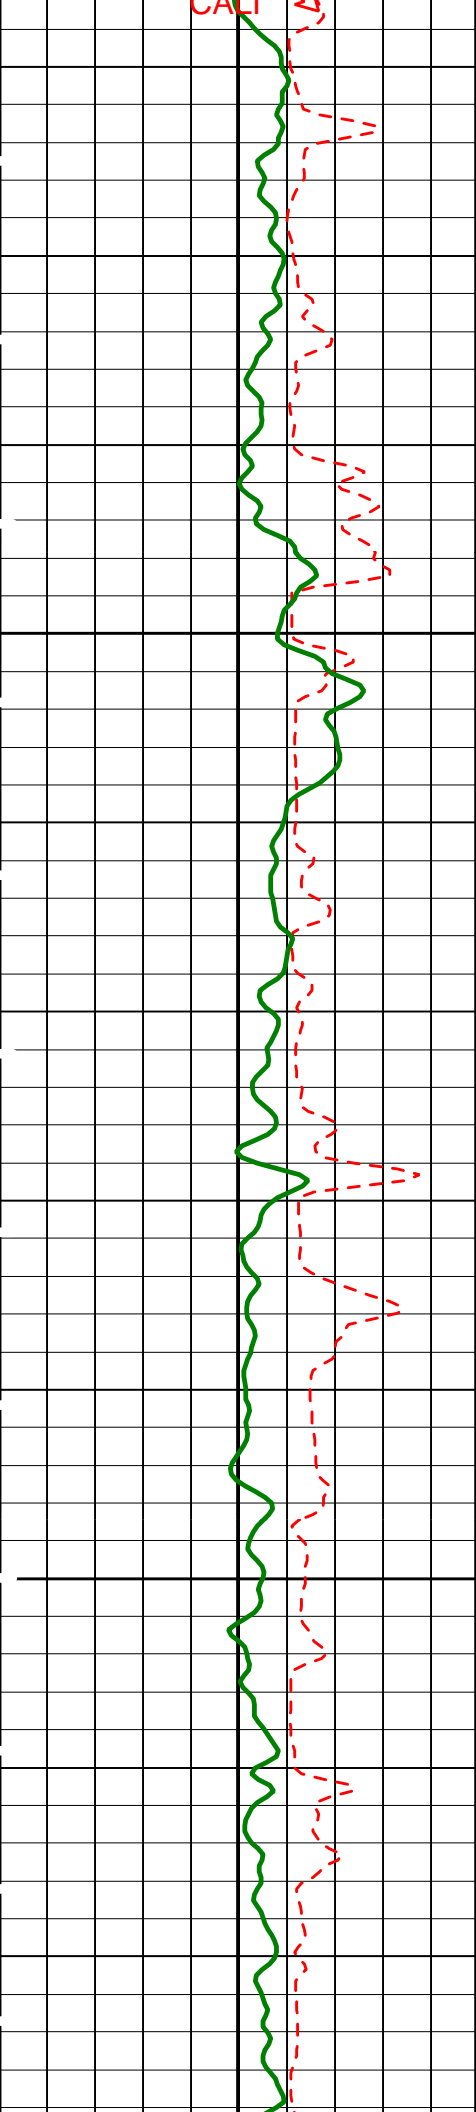

1225

1250

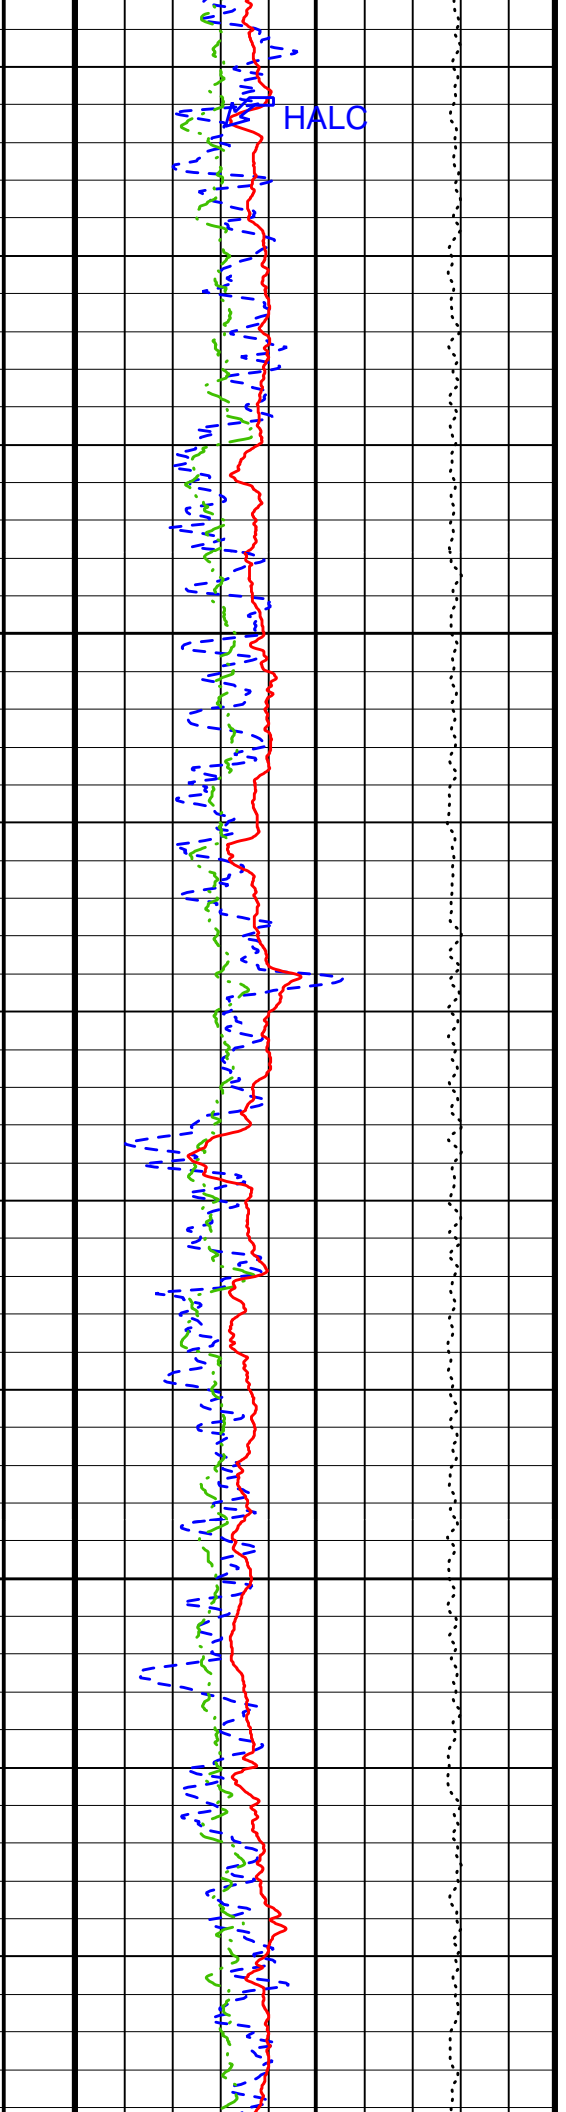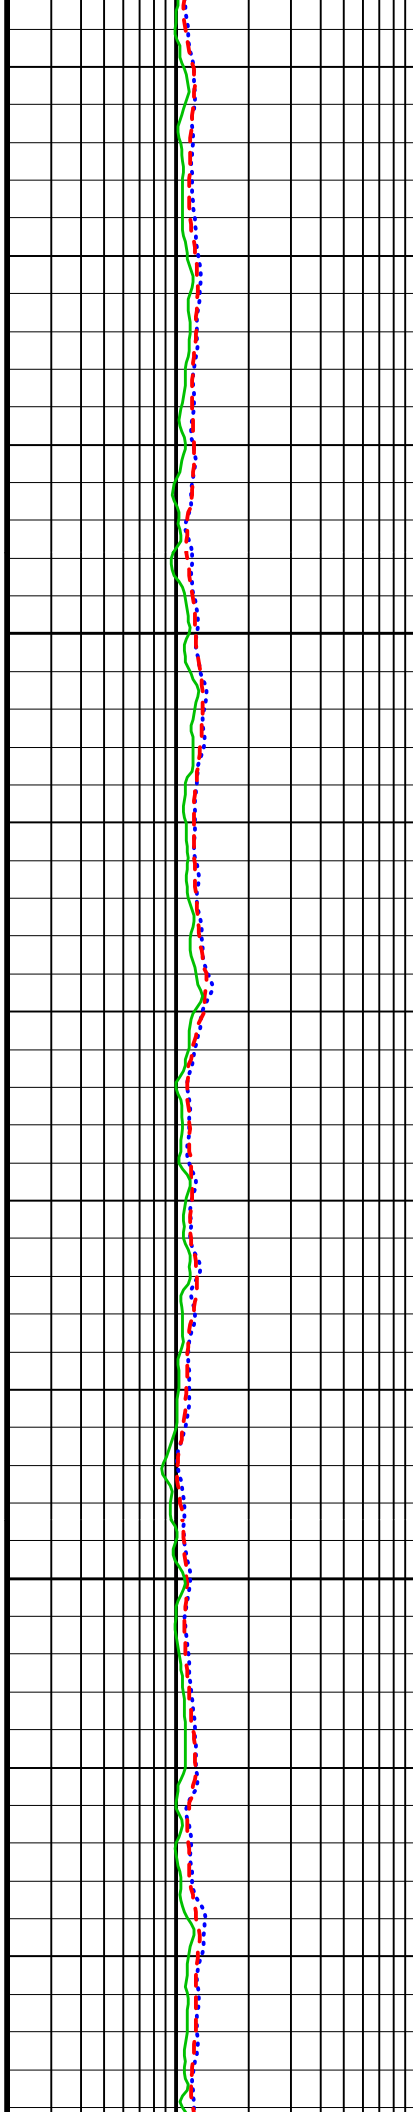

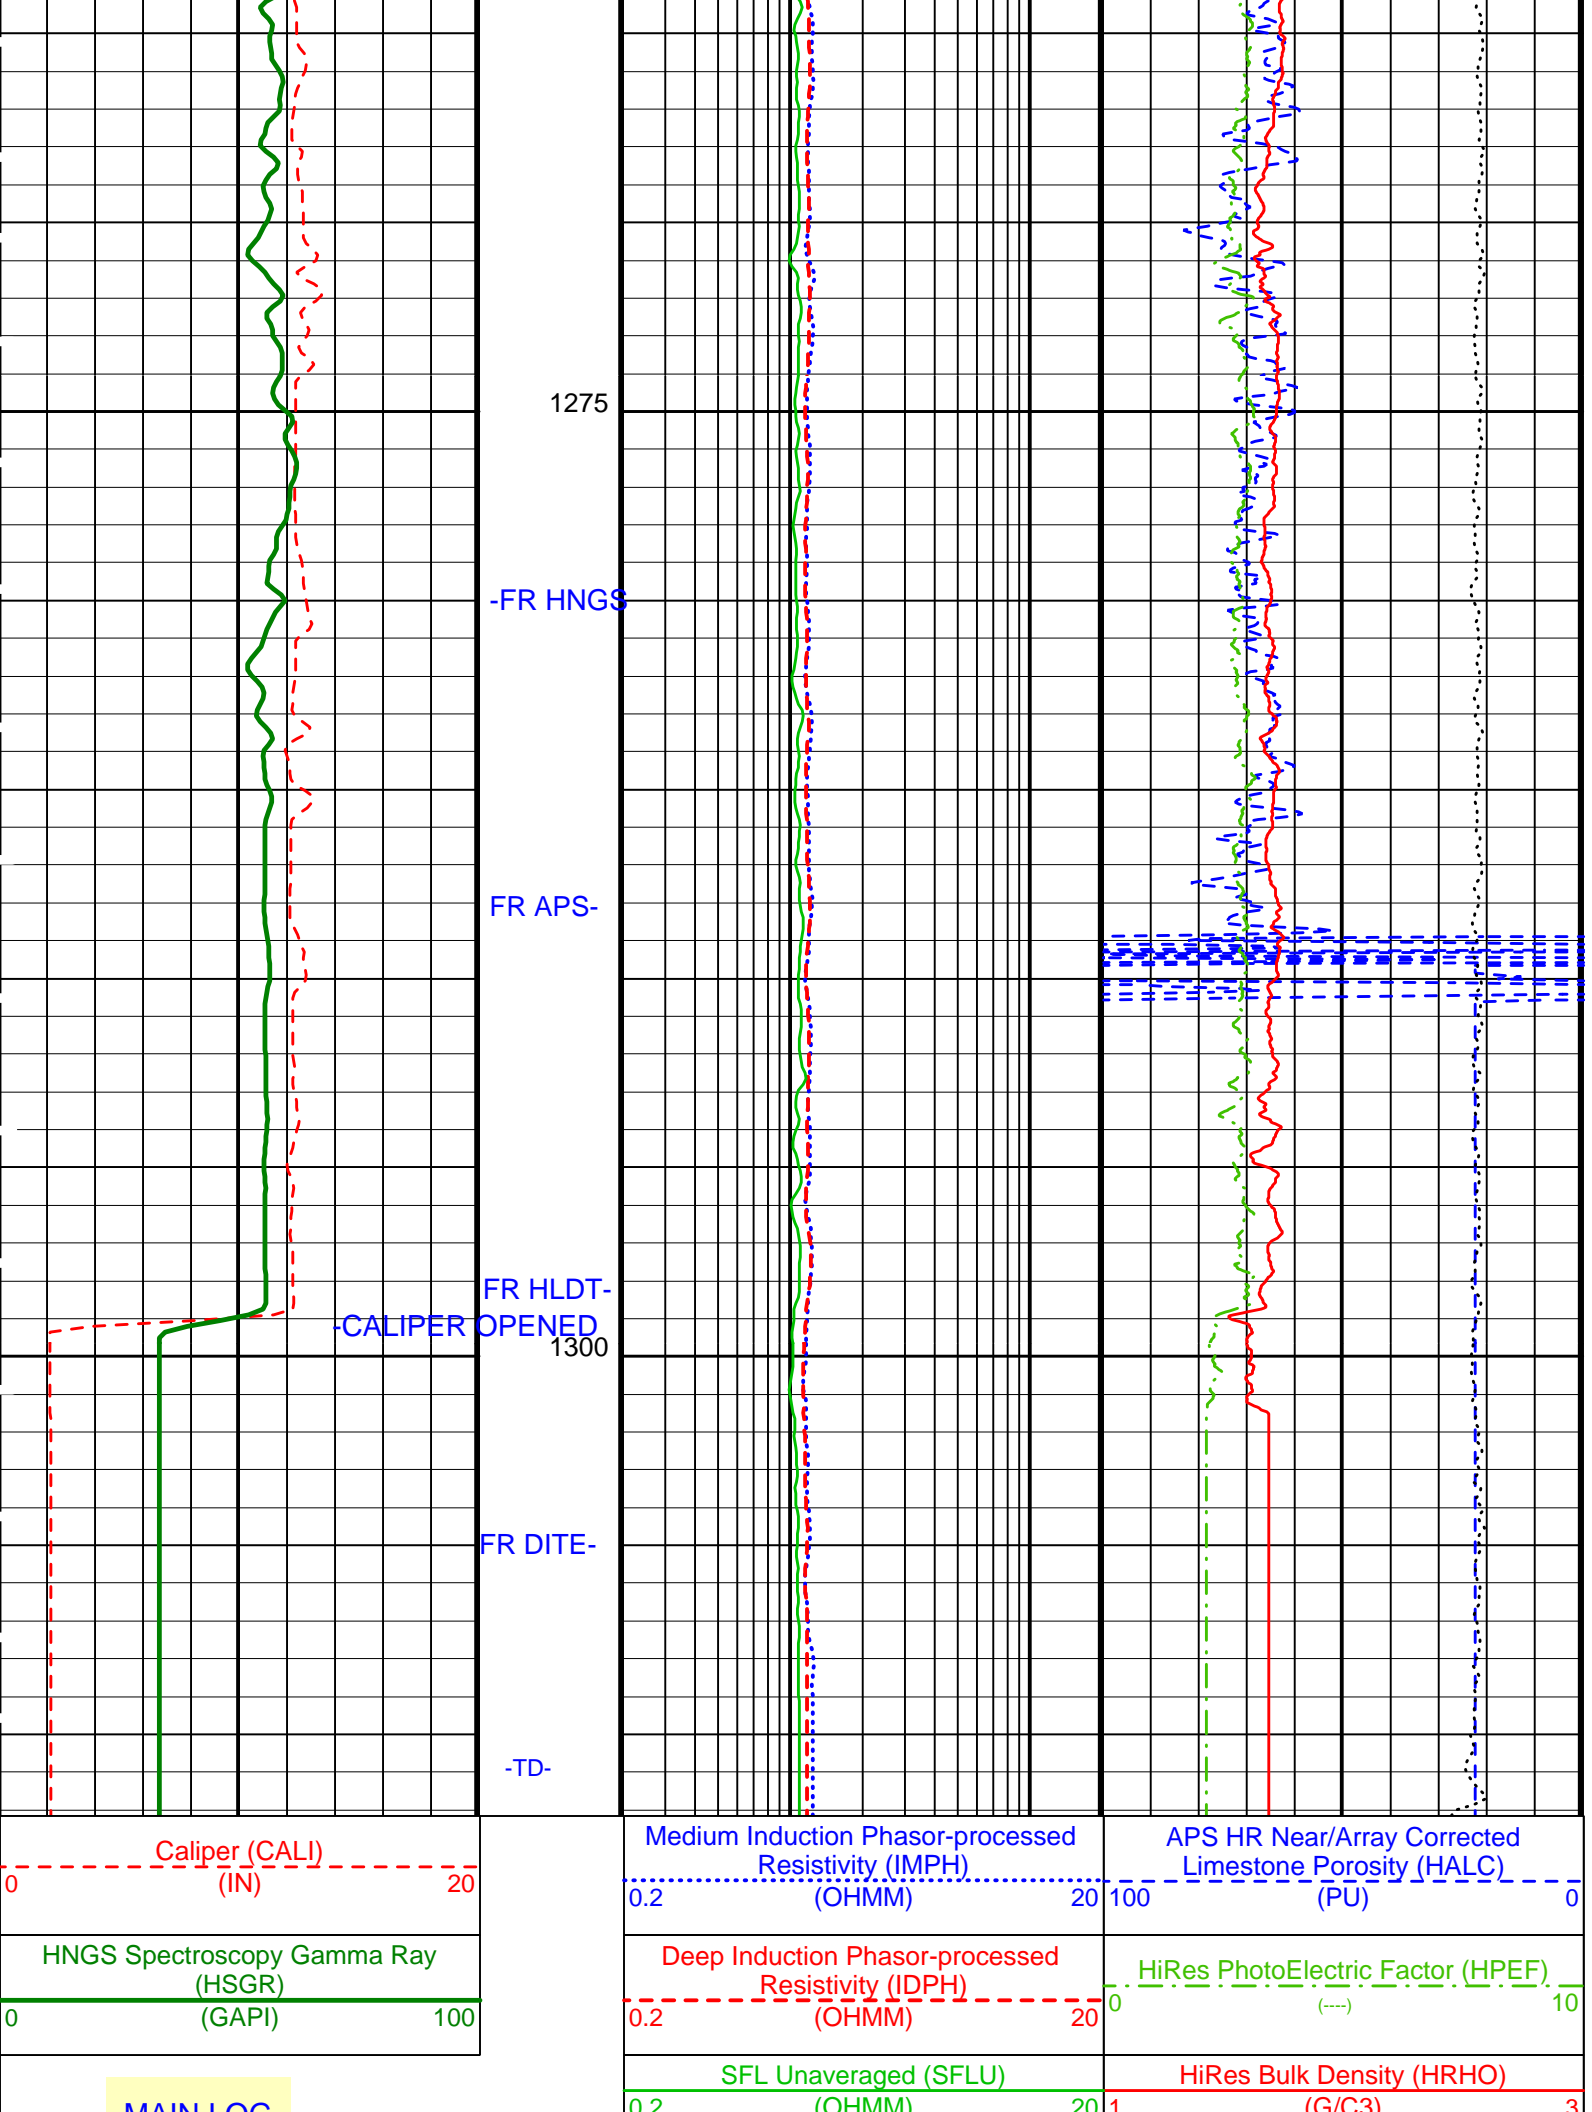

1275






-FR HNGS

FR APS-

FR HLDT-
-CALIPER OPENED
1300

FR DITE-

-TD-

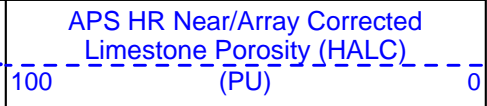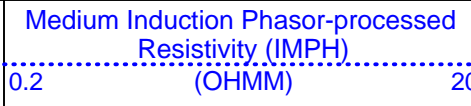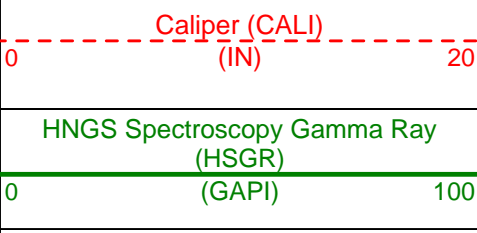

MAIN LOG

PIP SUMMARY

Time Mark Every 60 S

Parameters

DLIS Name	Description	Value	
DIT-E: Dual Induction - E			
BHS	Borehole Status	OPEN	
BHT	Bottom Hole Temperature (used in calculations)	100	DEGC
DGF1	Deep 10 kHz Gain Factor	0.995593	
DGF2	Deep 20 kHz Gain Factor	1.00789	
DGF4	Deep 40 kHz Gain Factor	1.02614	
DPH1	Deep 10 kHz Phase Shift	0.114289	DEG
DPH2	Deep 20 kHz Phase Shift	-0.152394	DEG
DPH4	Deep 40 kHz Phase Shift	-1.42629	DEG
DRE1	Deep Real 10 kHz Sonde Error Correction	44.9501	MM/M
DRE2	Deep Real 20 kHz Sonde Error Correction	16.357	MM/M
DRE4	Deep Real 40 kHz Sonde Error Correction	4.69026	MM/M
DRIM	DIT-E Radial Invasion Mode	Rxo>Rt	
DSR1	Deep Sigma Reference (10 kHz)	7637	MM/M
DSR2	Deep Sigma Reference (20 kHz)	1843	MM/M
DSR4	Deep Sigma Reference (40 kHz)	405	MM/M
DSTA	DIT-E Transversal Standoff	0	IN
DXE1	Deep Quad 10 kHz Sonde Error Correction	108.903	MM/M
DXE2	Deep Quad 20 kHz Sonde Error Correction	64.6326	MM/M
DXE4	Deep Quad 40 kHz Sonde Error Correction	46.096	MM/M
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
IFRS	DIT-E Induction Frequency Selector	20	
IPHA	DIT-E Phasor Processing Mode	ALL	
IPRO	DIT-E Induction Processing Selector	PHASOR	
ITEN	DIT-E Temperature Enable	ENABLE	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
MGF1	Medium 10 kHz Gain Factor	1.02182	
MGF2	Medium 20 kHz Gain Factor	1.02964	
MGF4	Medium 40 kHz Gain Factor	1.06122	
MPH1	Medium 10 kHz Phase Shift	-0.255819	DEG
MPH2	Medium 20 kHz Phase Shift	-0.933067	DEG
MPH4	Medium 40 kHz Phase Shift	-2.46117	DEG
MRE1	Medium Real 10 kHz Sonde Error Correction	20.7292	MM/M
MRE2	Medium Real 20 kHz Sonde Error Correction	-1.78642	MM/M
MRE4	Medium Real 40 kHz Sonde Error Correction	-10.4594	MM/M
MSR1	Medium Sigma Reference (10 kHz)	13520	MM/M
MSR2	Medium Sigma Reference (20 kHz)	3250	MM/M
MSR4	Medium Sigma Reference (40 kHz)	685	MM/M
MXE1	Medium Quad 10 kHz Sonde Error Correction	-105.752	MM/M
MXE2	Medium Quad 20 kHz Sonde Error Correction	-34.2041	MM/M
MXE4	Medium Quad 40 kHz Sonde Error Correction	11.4521	MM/M
SBR	Shoulder Bed Resistivity Factor	1	OHMM
SFCR	SFL Channel Ratio	1000	
SFLE	SFL Enable	ENABLE	
SHT	Surface Hole Temperature	20	DEGC
SPAE	DIT-E SPARC Processing Enable	ENABLE	
SPNV	SP Next Value	0	MV
HLDT-A: Hostile Environment Litho Density - A			
BFM	Borehole Fluid Medium	LIQUID	
DHC	Density Hole Correction	BS	
DPPM	Density Porosity Processing Mode	HIRS	
FD	Fluid Density	1	G/C3
LSHC	LS Hardware Loop Control	DISALLOW	
MDEN	Matrix Density	2.71	G/C3
QPPS	Quicklook Processing Pe Select	PEFL	
SSHC	SS Hardware Loop Control	DISALLOW	
WMUD	Mud Weight	0.994556	G/C3
NPLC-B: Nuclear Porosity Lithology Cartridge - B			
NOTS	NPLC Old Temperature Sensor	NO	
APS-BA: Accelerator-Porosity Tool			
	APS Software Version	5	
AASD	APS Thermal and Array Detectors High Voltage Setting	1968.98	V
ABOS	APS Neutron Burst-Off Background Subtraction Switch	ON	
ADSO	APS Array Detectors Data Source Switch	Both	
AFSD	APS Far Detector High Voltage Setting	2052.03	V
AHCS	APS Holesize Correction Source	GCSE	
AHSS	APS Holesize Correction Switch	ON	

AMTY	APS Environmental Mud Type	WaterBaseBarite	
ANSD	APS Near Detector High Voltage Setting	1748.3	V
AOTS	APS Old Temperature Sensor Switch	NO	
ASOS	APS Standoff Correction Switch	ON	
ATSS	APS Temperature-Pressure-Salinity Correction Switch	OFF	
BHS	Borehole Status	OPEN	
BHT	Bottom Hole Temperature (used in calculations)	100	DEGC
DPPM	Density Porosity Processing Mode	HIRS	
FSAL	Formation Salinity	-50000	PPM
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
NARC	APS Near/Array Calibration Ratio	1.06555	
NFRC	APS Near/Far Calibration Ratio	0.907568	
SHT	Surface Hole Temperature	20	DEGC
HNCS-BA: Hostile Natural Gamma Ray Sonde			
BAR1	HNCS Detector 1 Barite Constant	1	
BAR2	HNCS Detector 2 Barite Constant	1	
BHK	HNCS Borehole Potassium Correction Concentration	0	
BHS	Borehole Status	OPEN	
BHT	Bottom Hole Temperature (used in calculations)	100	DEGC
CSD1	Inner Casing Outer Diameter	0	IN
CSD2	Outer Casing Outer Diameter	0	IN
CSW1	Inner Casing Weight	0	LB/F
CSW2	Outer Casing Weight	0	LB/F
DBCC	HNCS Barite Constant Correction Flag	NONE	
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
H1P	HNCS Detector 1 Allow/Disallow In Processing	ALLOW	
H2P	HNCS Detector 2 Allow/Disallow In Processing	ALLOW	
HABK	HNCS Borehole Potassium Running Average	-0.00815183	
HALF	HNCS Alpha Filter Length	60	IN
HCRB	HNCS Apply Borehole Potassium Correction	NONE	
HMWM	Mud Weighting Material	NATU	
HNPE	HNCS Processing Enable	YES	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
S1BI	HNCS Detector 1 Calibration Bismuth Count Rate	1.3	CPS
S2BI	HNCS Detector 2 Calibration Bismuth Count Rate	1.3	CPS
SGRC	HNCS Standard Gamma-Ray Correction Flag	YES	
SHT	Surface Hole Temperature	20	DEGC
TPOS	Tool Position	ECCE	
VBA1	HNCS Detector 1 Variable Barite Factor Running Average	0.945727	
VBA2	HNCS Detector 2 Variable Barite Factor Running Average	0.953644	
System and Miscellaneous			
ALTDCHAN	Name of alternate depth channel	SpeedCorrectedDepth	
BS	Bit Size	11.438	IN
BSAL	Borehole Salinity	-50000.00	PPM
CSIZ	Current Casing Size	0.000	IN
CWEI	Casing Weight	0.00	LB/F
DFD	Drilling Fluid Density	1.10	G/C3
MST	Mud Sample Temperature	27.00	DEGC
PBVSADP	Use alternate depth channel for playback	NO	
RMFS	Resistivity of Mud Filtrate Sample	-50000.0000	OHMM
RW	Resistivity of Connate Water	1.0000	OHMM
TD	Total Depth	-50000	M
TDD	Total Depth - Driller	1320.00	M
TDL	Total Depth - Logger	1320.00	M
TWS	Temperature of Connate Water Sample	37.78	DEGC

Format: HLDT_HR_TCOM Vertical Scale: 1:200 Graphics File Created: 31-Aug-2002 06:56

OP System Version: 10C0-306 MCM

DIT-E	10C0-306	HLDT-A	10C0-306
DTA-A	10C0-306	NPLC-B	OP10-KP1
APS-BA	OP10-KP1	HNCS-BA	OP10-KP1
DTC-H	10C0-306		

Output DLIS Files

DEFAULT	PI_LDL_APS_NGS_004LUP	FN:6	PRODUCER	31-Aug-2002 06:56
REDUCE	PI_LDL_APS_NGS_004LUP	FN:7	PRODUCER	31-Aug-2002 06:56

Output DLIS Files

DEFAULT	PI_LDL_APS_NGS_005LUP	FN:8	PRODUCER	31-Aug-2002 08:04	1232.2 M	1111.3 M
REDUCE	PI_LDL_APS_NGS_005LUP	FN:9	PRODUCER	31-Aug-2002 08:04	1232.2 M	1111.3 M


OP System Version: 10C0-306 MCM




DIT-E	10C0-306	HLDT-A	10C0-306
DTA-A	10C0-306	NPLC-B	OP10-KP1
APS-BA	OP10-KP1	HNGS-BA	OP10-KP1
DTC-H	10C0-306		


PIP SUMMARY

Time Mark Every 60 S

		Tension (TENS)	
		10000	(LBF)
REPEAT SECTION		SFL Unaveraged (SFLU)	HiRes Bulk Density (HRHO)
0.2	(OHMM)	20	1
			HiRes PhotoElectric Factor (HPEF)
			(---)
			10
HNGS Spectroscopy Gamma Ray (HSGR)		Deep Induction Phasor-processed Resistivity (IDPH)	APS HR Near/Array Corrected Limestone Porosity (HALC)
0	(GAPI)	20	100
			(PU)
			0
Caliper (CALI)		Medium Induction Phasor-processed Resistivity (IMPH)	
0	(IN)	20	

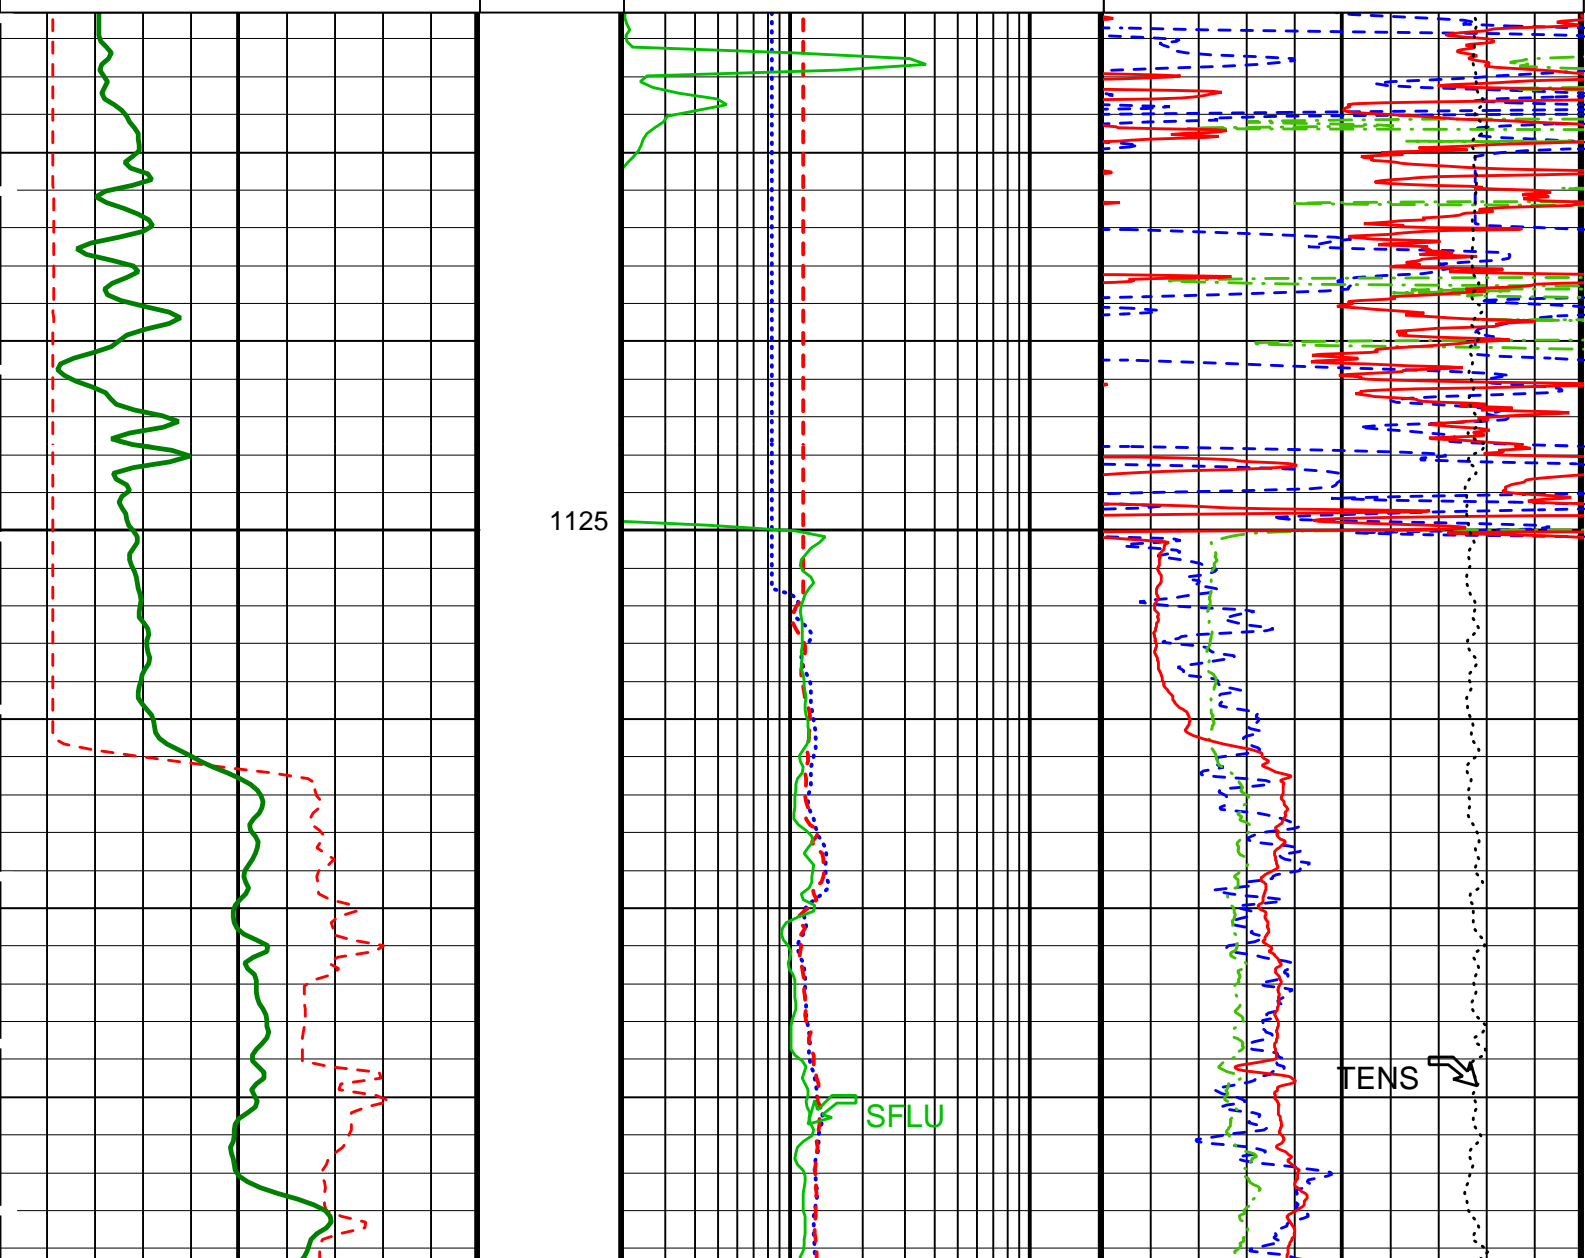

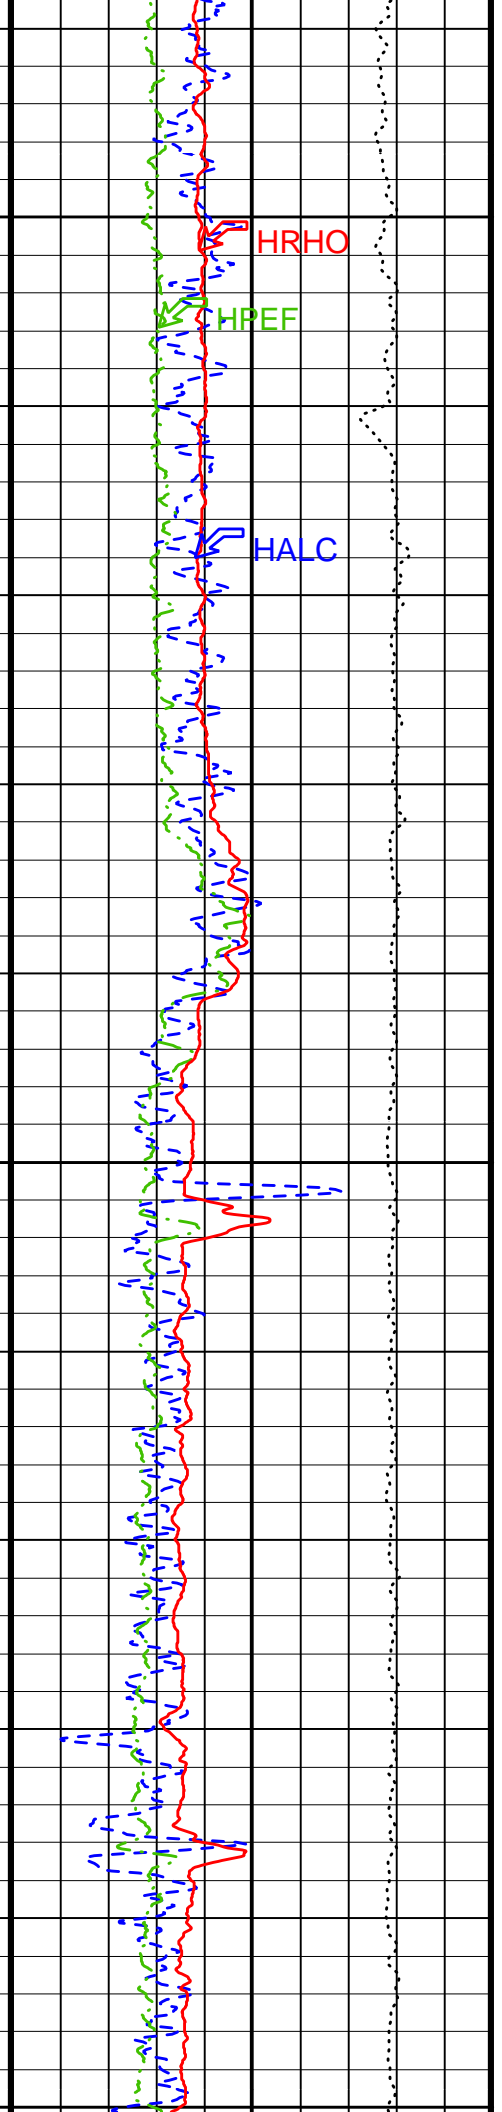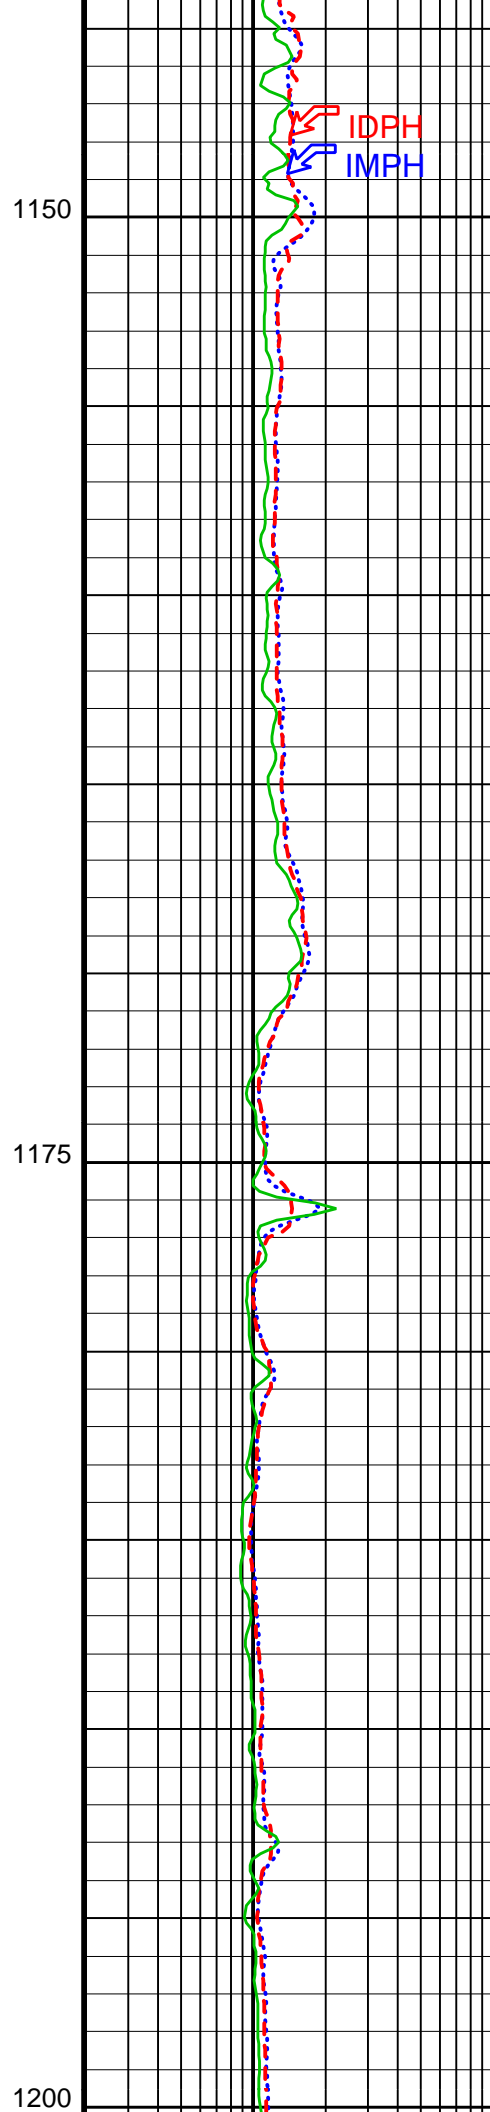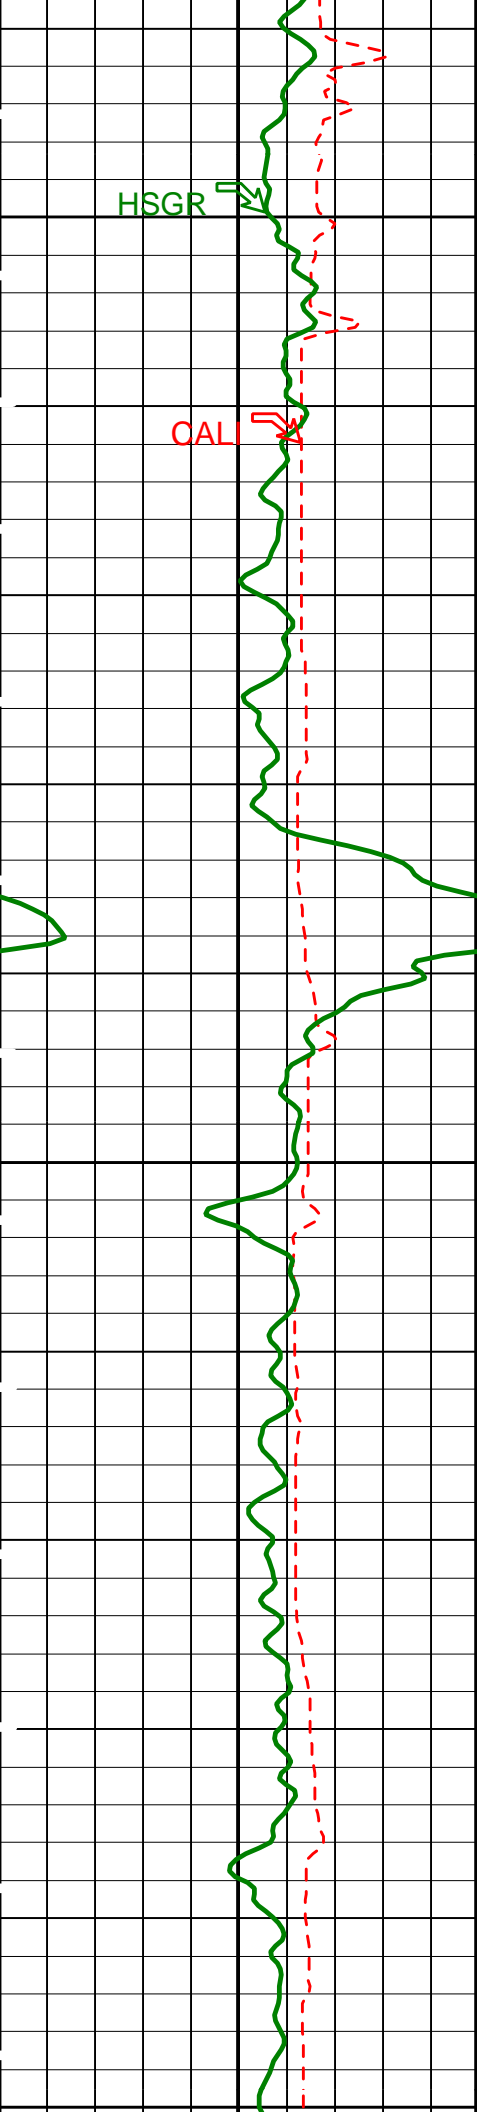

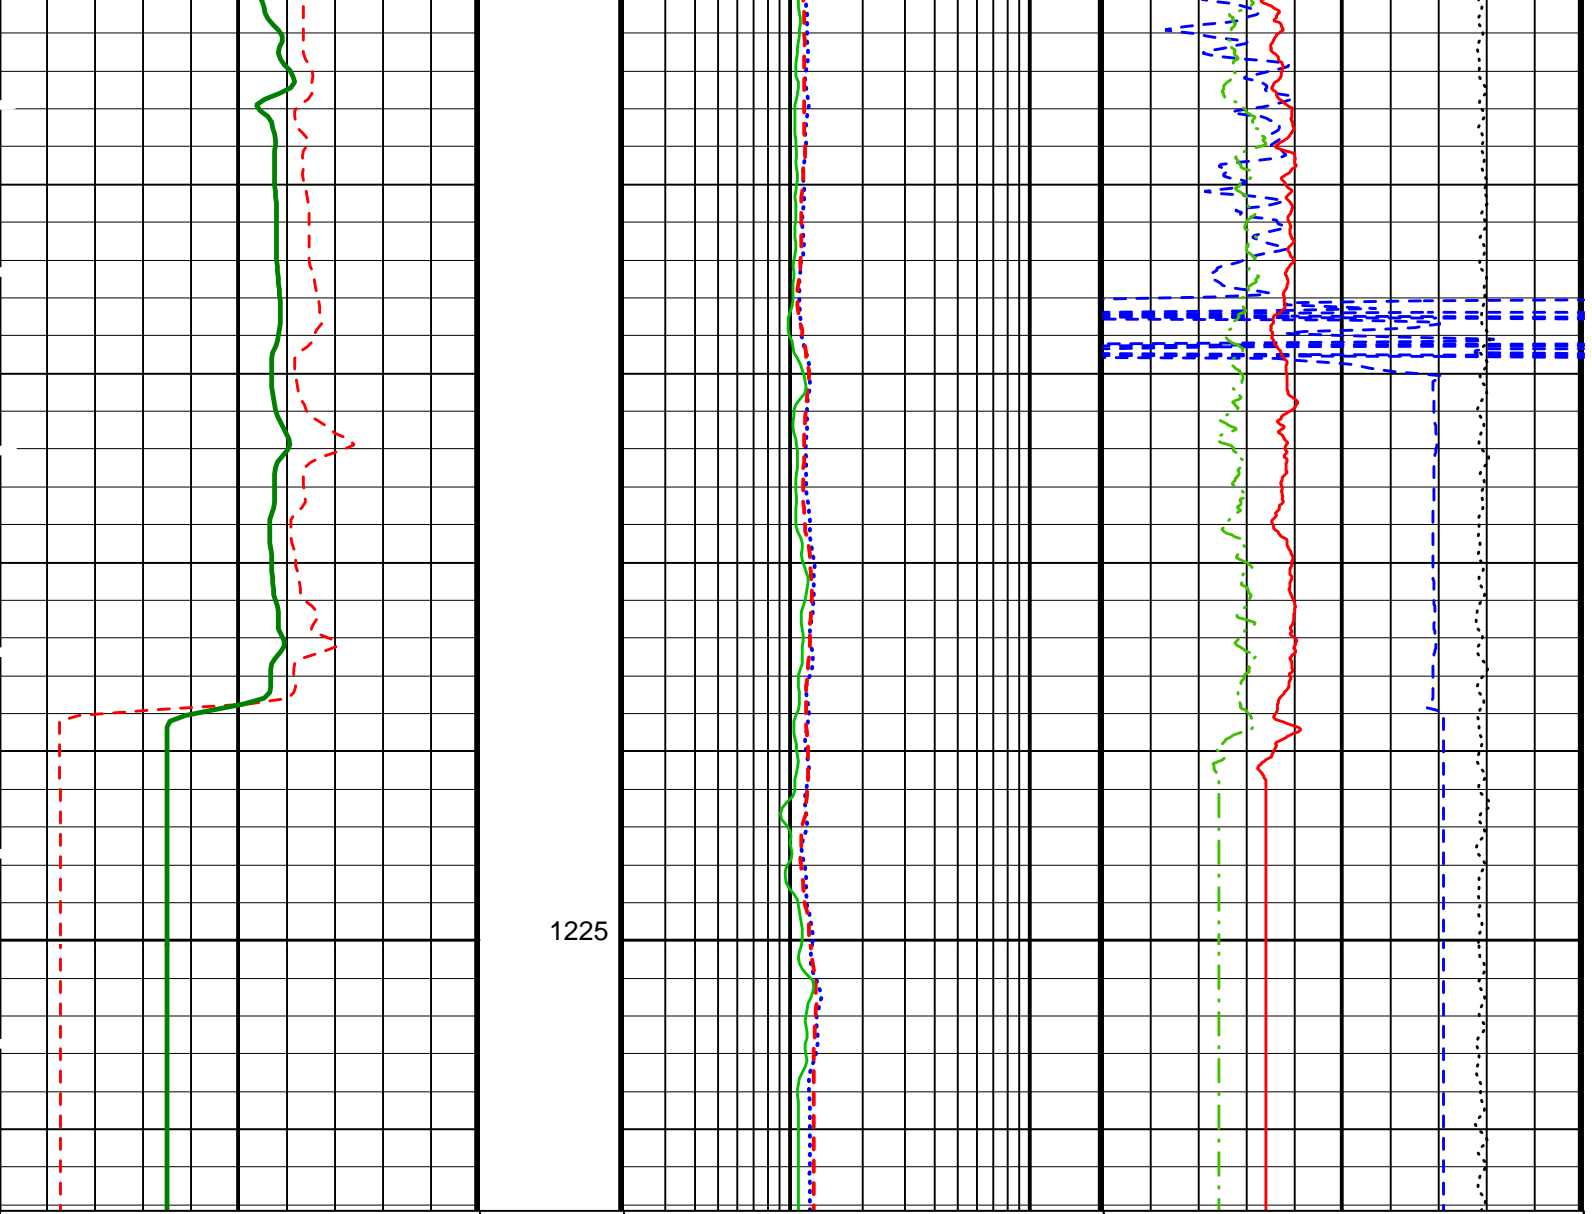

0	Caliper (CALI) (IN)	20	0.2	Medium Induction Phasor-processed Resistivity (IMPH) (OHMM)	20	100	APS HR Near/Array Corrected Limestone Porosity (HALC) (PU)	0
0	HNGS Spectroscopy Gamma Ray (HSGR) (GAPI)	100	0.2	Deep Induction Phasor-processed Resistivity (IDPH) (OHMM)	20	0	HiRes PhotoElectric Factor (HPEF) (---)	10
	REPEAT SECTION		0.2	SFL Unaveraged (SFLU) (OHMM)	20	1	HiRes Bulk Density (HRHO) (G/C3)	3
							Tension (TENS) (LBF)	10000
								0

PIP SUMMARY

Time Mark Every 60 S

Parameters

DLIS Name	Description	Value
DIT-E: Dual Induction - E		
BHS	Borehole Status	OPEN
BHT	Bottom Hole Temperature (used in calculations)	100 DEGC
DGF1	Deep 10 kHz Gain Factor	0.995593
DGF2	Deep 20 kHz Gain Factor	1.00789
DGF4	Deep 40 kHz Gain Factor	1.02614
DPH1	Deep 10 kHz Phase Shift	0.114289 DEG
DPH2	Deep 20 kHz Phase Shift	-0.152394 DEG
DPH4	Deep 40 kHz Phase Shift	-1.42629 DEG
DRE1	Deep Real 10 kHz Sonde Error Correction	44.9501 MM/M
DRE2	Deep Real 20 kHz Sonde Error Correction	16.357 MM/M

DRE2	Deep Real 20 kHz Sonde Error Correction	18.337	MM/M
DRE4	Deep Real 40 kHz Sonde Error Correction	4.69026	MM/M
DRIM	DIT-E Radial Invasion Mode	Rxo>Rt	
DSR1	Deep Sigma Reference (10 kHz)	7637	MM/M
DSR2	Deep Sigma Reference (20 kHz)	1843	MM/M
DSR4	Deep Sigma Reference (40 kHz)	405	MM/M
DSTA	DIT-E Transversal Standoff	0	IN
DXE1	Deep Quad 10 kHz Sonde Error Correction	108.903	MM/M
DXE2	Deep Quad 20 kHz Sonde Error Correction	64.6326	MM/M
DXE4	Deep Quad 40 kHz Sonde Error Correction	46.096	MM/M
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
IFRS	DIT-E Induction Frequency Selector	20	
IPHA	DIT-E Phasor Processing Mode	ALL	
IPRO	DIT-E Induction Processing Selector	PHASOR	
ITEN	DIT-E Temperature Enable	ENABLE	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
MGF1	Medium 10 kHz Gain Factor	1.02182	
MGF2	Medium 20 kHz Gain Factor	1.02964	
MGF4	Medium 40 kHz Gain Factor	1.06122	
MPH1	Medium 10 kHz Phase Shift	-0.255819	DEG
MPH2	Medium 20 kHz Phase Shift	-0.933067	DEG
MPH4	Medium 40 kHz Phase Shift	-2.46117	DEG
MRE1	Medium Real 10 kHz Sonde Error Correction	20.7292	MM/M
MRE2	Medium Real 20 kHz Sonde Error Correction	-1.78642	MM/M
MRE4	Medium Real 40 kHz Sonde Error Correction	-10.4594	MM/M
MSR1	Medium Sigma Reference (10 kHz)	13520	MM/M
MSR2	Medium Sigma Reference (20 kHz)	3250	MM/M
MSR4	Medium Sigma Reference (40 kHz)	685	MM/M
MXE1	Medium Quad 10 kHz Sonde Error Correction	-105.752	MM/M
MXE2	Medium Quad 20 kHz Sonde Error Correction	-34.2041	MM/M
MXE4	Medium Quad 40 kHz Sonde Error Correction	11.4521	MM/M
SBR	Shoulder Bed Resistivity Factor	1	OHMM
SFCR	SFL Channel Ratio	1000	
SFLE	SFL Enable	ENABLE	
SHT	Surface Hole Temperature	20	DEGC
SPAE	DIT-E SPARC Processing Enable	ENABLE	
SPNV	SP Next Value	0	MV
	HLDT-A: Hostile Environment Litho Density - A		
BFM	Borehole Fluid Medium	LIQUID	
DHC	Density Hole Correction	BS	
DPPM	Density Porosity Processing Mode	HIRS	
FD	Fluid Density	1	G/C3
LSHC	LS Hardware Loop Control	DISALLOW	
MDEN	Matrix Density	2.71	G/C3
QPPS	Quicklook Processing Pe Select	PEFL	
SSHC	SS Hardware Loop Control	DISALLOW	
WMUD	Mud Weight	0.994556	G/C3
	NPLC-B: Nuclear Porosity Lithology Cartridge - B		
NOTS	NPLC Old Temperature Sensor	NO	
	APS-BA: Accelerator-Porosity Tool		
	APS Software Version	5	
AASD	APS Thermal and Array Detectors High Voltage Setting	1968.98	V
ABOS	APS Neutron Burst-Off Background Subtraction Switch	ON	
ADSO	APS Array Detectors Data Source Switch	Both	
AFSD	APS Far Detector High Voltage Setting	2052.03	V
AHCS	APS Holesize Correction Source	GCSE	
AHSS	APS Holesize Correction Switch	ON	
AMTY	APS Environmental Corrections Mud Type	WaterBaseBarite	
ANSD	APS Near Detector High Voltage Setting	1748.3	V
AOTS	APS Old Temperature Sensor Switch	NO	
ASOS	APS Standoff Correction Switch	ON	
ATSS	APS Temperature-Pressure-Salinity Correction Switch	OFF	
BHS	Borehole Status	OPEN	
BHT	Bottom Hole Temperature (used in calculations)	100	DEGC
DPPM	Density Porosity Processing Mode	HIRS	
FSAL	Formation Salinity	-50000	PPM
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
NARC	APS Near/Array Calibration Ratio	1.06555	
NFRC	APS Near/Far Calibration Ratio	0.907568	
SHT	Surface Hole Temperature	20	DEGC
	HNGS-BA: Hostile Natural Gamma Ray Sonde		
BAR1	HNGS Detector 1 Barite Constant	1	
BAR2	HNGS Detector 2 Barite Constant	1	
BHK	HNGS Borehole Potassium Correction Concentration	0	
BHS	Borehole Status	OPEN	
BHT	Bottom Hole Temperature (used in calculations)	100	DEGC

CSD1	Inner Casing Outer Diameter	0	IN
CSD2	Outer Casing Outer Diameter	0	IN
CSW1	Inner Casing Weight	0	LB/F
CSW2	Outer Casing Weight	0	LB/F
DBCC	HNGS Barite Constant Correction Flag	NONE	
GCSE	Generalized Caliper Selection	CALI	
GDEV	Average Angular Deviation of Borehole from Normal	0	DEG
GGRD	Geothermal Gradient	0.018227	DC/M
GRSE	Generalized Mud Resistivity Selection	CHART_GEN_9	
GTSE	Generalized Temperature Selection	LINEAR_ESTIMATE	
H1P	HNGS Detector 1 Allow/Disallow In Processing	ALLOW	
H2P	HNGS Detector 2 Allow/Disallow In Processing	ALLOW	
HABK	HNGS Borehole Potassium Running Average	-0.00966604	
HALF	HNGS Alpha Filter Length	60	IN
HCRB	HNGS Apply Borehole Potassium Correction	NONE	
HMWM	Mud Weighting Material	NATU	
HNPE	HNGS Processing Enable	YES	
MATR	Rock Matrix for Neutron Porosity Corrections	LIMESTONE	
S1BI	HNGS Detector 1 Calibration Bismuth Count Rate	1.3	CPS
S2BI	HNGS Detector 2 Calibration Bismuth Count Rate	1.3	CPS
SGRC	HNGS Standard Gamma-Ray Correction Flag	YES	
SHT	Surface Hole Temperature	20	DEGC
TPOS	Tool Position	ECCE	
VBA1	HNGS Detector 1 Variable Barite Factor Running Average	0.95148	
VBA2	HNGS Detector 2 Variable Barite Factor Running Average	0.963097	
System and Miscellaneous			
ALTDPCCHAN	Name of alternate depth channel	SpeedCorrectedDepth	
BS	Bit Size	11.438	IN
BSAL	Borehole Salinity	-50000.00	PPM
CSIZ	Current Casing Size	0.000	IN
CWEI	Casing Weight	0.00	LB/F
DFD	Drilling Fluid Density	1.10	G/C3
MST	Mud Sample Temperature	27.00	DEGC
PBVSADP	Use alternate depth channel for playback	NO	
RMFS	Resistivity of Mud Filtrate Sample	-50000.0000	OHMM
RW	Resistivity of Connate Water	1.0000	OHMM
TD	Total Depth	-50000	M
TDD	Total Depth - Driller	1320.00	M
TDL	Total Depth - Logger	1320.00	M
TWS	Temperature of Connate Water Sample	37.78	DEGC

Format: HLDT_HR_TCOM Vertical Scale: 1:200 Graphics File Created: 31-Aug-2002 08:04

OP System Version: 10C0-306

MCM

DIT-E	10C0-306	HLDT-A	10C0-306
DTA-A	10C0-306	NPLC-B	OP10-KP1
APS-BA	OP10-KP1	HNGS-BA	OP10-KP1
DTC-H	10C0-306		

Output DLIS Files

DEFAULT	PI_LDL_APS_NGS_005LUP	FN:8	PRODUCER	31-Aug-2002 08:04
REDUCE	PI_LDL_APS_NGS_005LUP	FN:9	PRODUCER	31-Aug-2002 08:04

Company: Lamont Doherty

Schlumberger

Well: ODP Leg 204, Site 1252A

Field: Hydrate Ridge

Ocean: Pacific

State: Oregon

Phasor Induction
HLDT/APS Porosity
Natural Gamma Ray (Tcombo)