ODP Leg 200 - Hole 1224F

The following figures show the main logs recorded in Hole 1224F during ODP Leg 200. All the data displayed can be downloaded from the ODP logging database: http://brg.ldeo.columbia.edu/data/odp/leg200/1224F

The figures were generated automatically, including the estimation of ranges used for the data, and regardless of their quality. To get a more complete assessment of the quality of the data and a description of the processing, check the processing documentation:

http://brg.ldeo.columbia.edu/data/odp/leg200/1224F/documents/200-1224F_info-std.html

Each measurement was recorded during several passes, acquired while lowering the tool string down the hole or while pulling it uphole.

The first figure displays the data over the longest pass for each type of measurement. In this figure, the resistivity curves show the measurements made by the DIT at several depths of investigation (shallow, deep,...) during the longest pass.


The second figure combines all the data from all passes for each measurement. The resistivity curves in this figure are for the deepest depth of investigation available from the tool(s) used.

The labels for each curve are derived from the name of the file in the database used for the figure.

The core data shown were collected from holes at the same site.

Longest logging passes in Hole 1224F - ODP Leg 200

| Hole Size Hole Size Gamma Ray Density Porosity Resistivity Compessional compessional Static FMS Static FMS Density resitive resitive LOAL (HLDS) C1,02 (FMS) HNGS [main] HLDT [main] APS [main] IDPH-deep [main] IDPH-deep [main] N E VS2 [pass] </th |
|---|
| S Bit size > |
| Slit size > |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |
| |

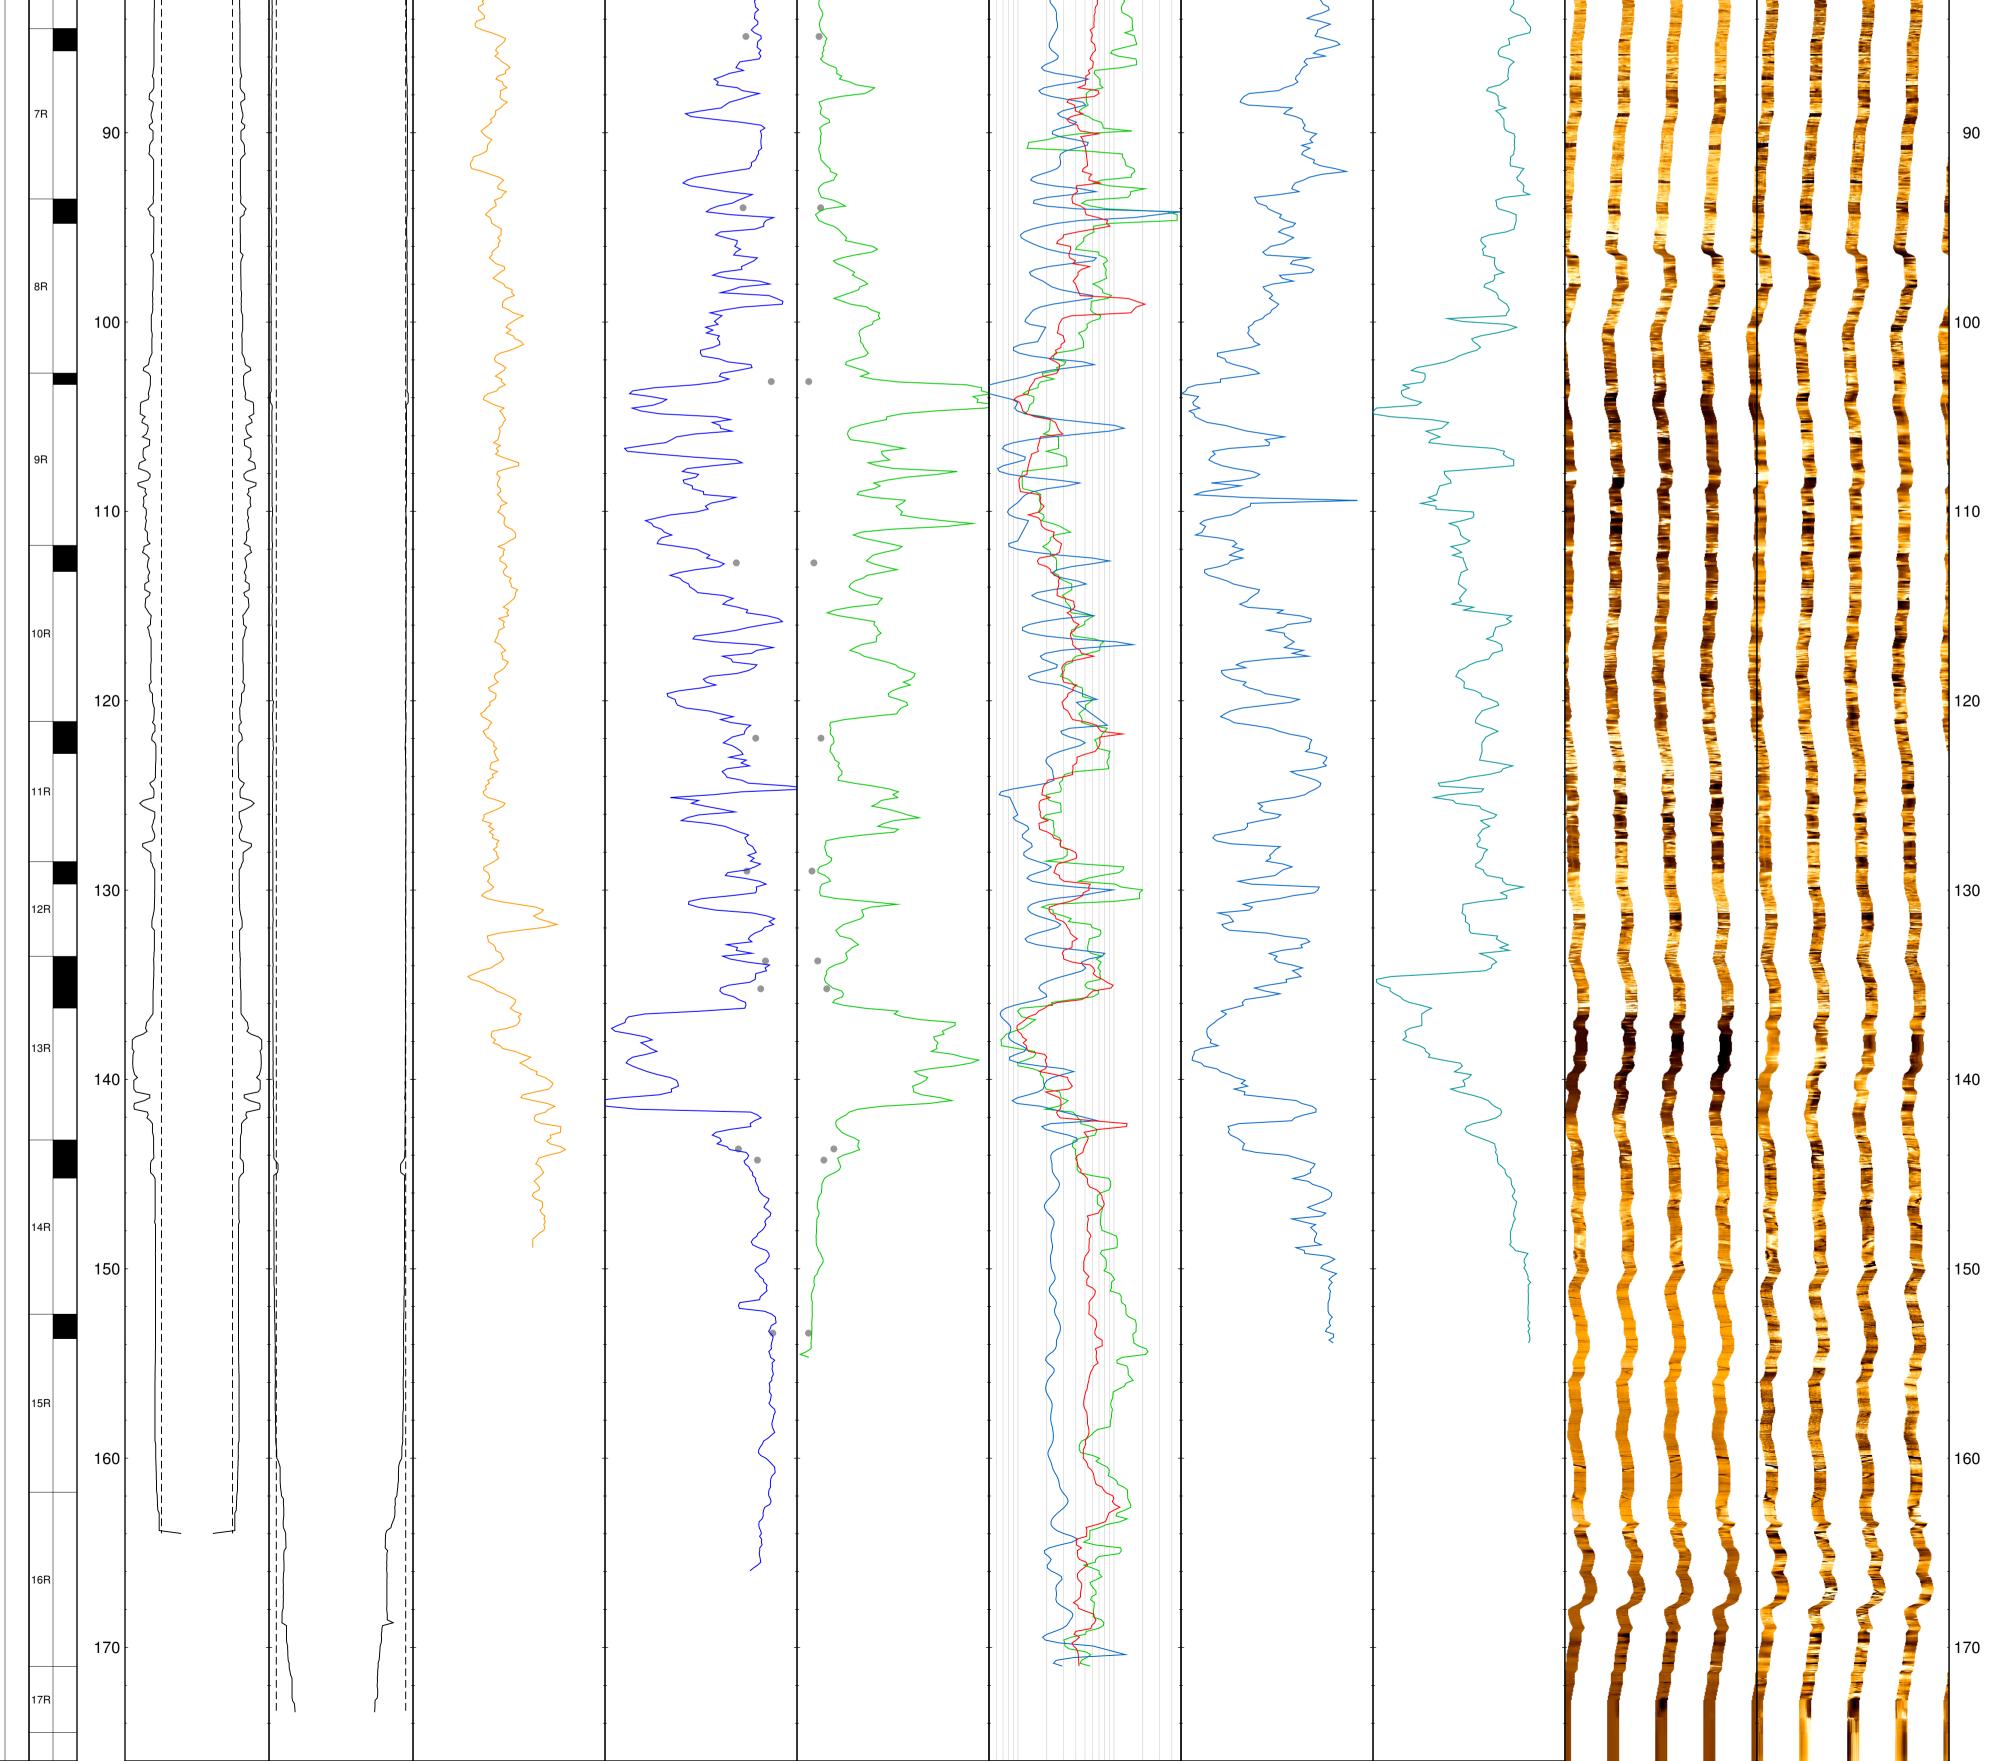

All logging passes in Hole 1224F - ODP Leg 200

| ecovery 24F cores ecovery | Depth (mbsf) | Hole Size | Hole Size | Gamma Ray | Density | Porosity | Resistivity | Compressional velocity | Shear velocity | Static FM | S resistive condu | Dynamic F | MS resistive |
|-----------------------------------|--------------|------------------------------|-----------------------------|---|------------------------------|------------|------------------|-------------------------|---------------------------------------|-----------|----------------------|-----------|-----------------|
| Recovery 1224F cor Recovery | Depth | LCAL (HLDS) | C1,C2 (FMS) | HNGS [main] | HLDT [main] | APS [main] | IDPH-deep [main] | pass 3 | VS2 [pass 3] | | | | |
| | | 0 Inches 200 < Bit size > |) Inches 11 < Bit size > | 0 gAPI 40 NGT [pass 1] NGT [pass 2] NGT [pass 3] | 1.8 g/cm3 3.1 0 core data | % 80 | 5 ohm.m 500 | 3050 m/s 7400 pass 1 | 700 m/s 3700 VS1 [pass 1] | | <u>WN</u> N | <u>ES</u> | M N |
| 2R | 40 - | | | | | | | | | | - | | |
| ЗR | 50 - | | | | | | | | | - | - | | |
| 4R | 60 - | | | | | | | A Mary Mary | A A A A A A A A A A A A A A A A A A A | | | | |
| 5R | 70 - | | | | | | | And | | | | | |
| 6R | 80 - | | | | | | | Amore | | | | | |

