IODP Expedition 367 - Hole U1499B

The following figures show the main logs recorded in Hole U1499B during IODP Expedition 367. All the data displayed can be downloaded from the IODP logging database:

http://brg.ldeo.columbia.edu/data/iodp-usio/exp367/U1499B

The figures were generated automatically, including the estimation of ranges used for the data, and regardless of their quality. To get a more complete assessment of the quality of the data and a description of the processing, check the processing documentation:

http://brg.ldeo.columbia.edu/data/iodp-usio/exp367/U1499B/documents/367-U1499B_info-std-wireline.html

Each measurement was recorded during several passes, acquired while lowering the tool string down the hole or while pulling it uphole.

The first figure displays the data over the longest pass for each type of measurement. In this figure, the resistivity curves show the measurements made by the HRLA at several depths of investigation (shallow, deep,...) during the longest pass.


The second figure combines all the data from all passes for each measurement. The resistivity curves in this figure are for the deepest depth of investigation available from the tool(s) used.

The labels for each curve are derived from the name of the file in the database used for the figure.

The core data shown were collected from holes at the same site.

Longest logging passes in Hole U1499B - IODP Expedition 367

3 cores ry	mbsf)	Hole Size	Hole Size	Gamma Ray	Density	Resistivity	Vp	Vs	Static FMS	Dynamic FMS Depth
U1499B cores Recovery	SDepth (mbsf)	LCAL (HLDS) 0 Inches 19 0	C1,C2 (FMS)	HNGS (fmsm) 7 40 gAPI 130	HLDS (main) 1.3 g/cm3 2.8 0.1	RT-true (down) ohm.m 50	down 1750 m/s 4700	VS2 (down) 0 500 m/s 3200		Dynamic FMS conductive resistive N E S W N 650
2R	660	<pre>bit size ></pre>	< bit size >		core data	R3medium (down) R5deep (down)		VS1 (down)		650
3R	670 -									670
4R	680 -									680
5R	690 -									690
6R	700 -									700
7R	710 -									710
8R	720 -									720
9R	730 -									730

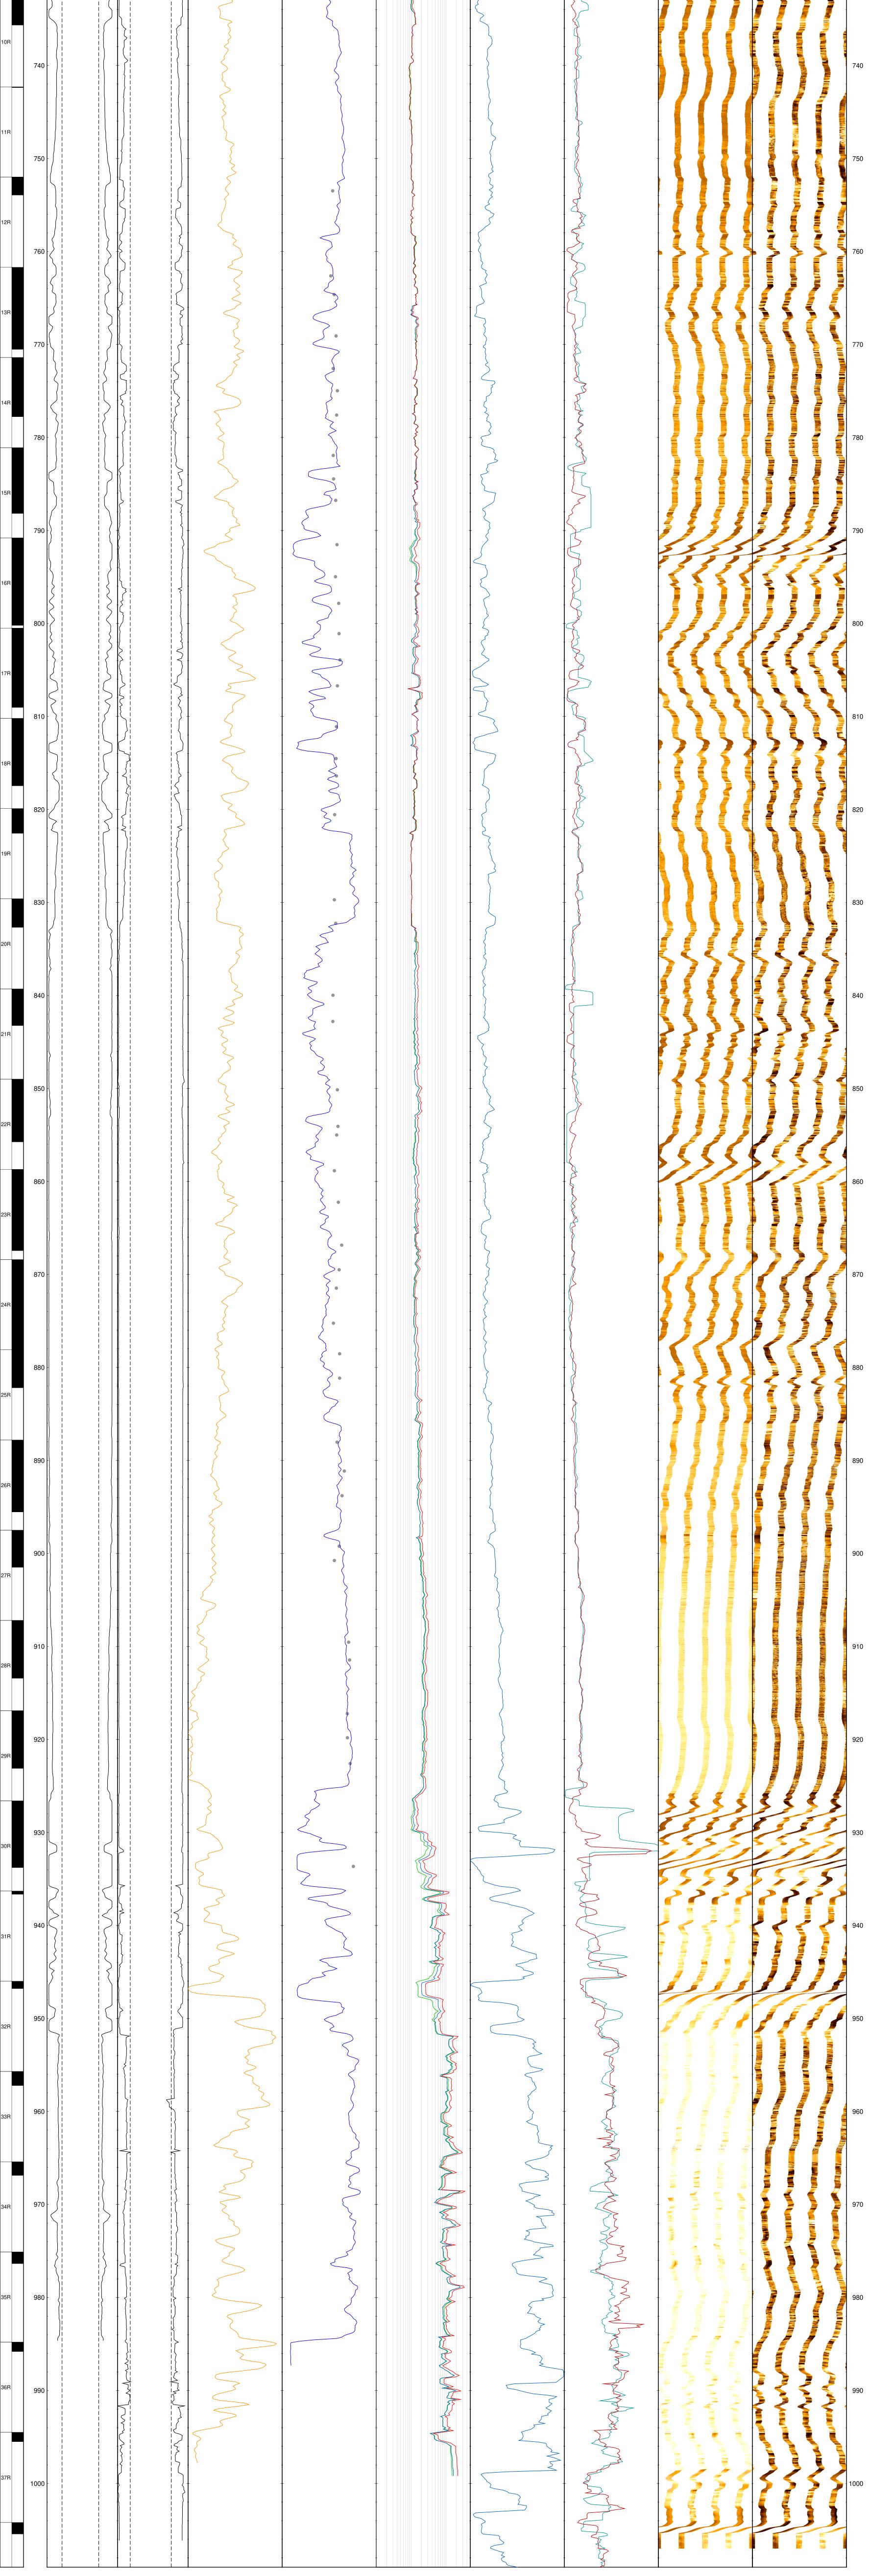

All logging passes in Hole U1499B - IODP Expedition 367

U1499B cores Recovery	90 epth (mbsf) □ ⊂	Hole Size	Hole Size	Gamma Ray	Density	Resistivity	Vp	Vs	Static FMS conductive resistive	Dynamic FMS conductive resistive N E S W N 650
U1499 Recove	Depth	LCAL (HLDS) Inches 19	C1,C2 (FMS) 0 Inches 17	HNGS (fmsm) 20 gAPI 130 1	HLDS (main) .3 g/cm3 2.7 (RT-true (down) 0.1 ohm.m 50 17	down 50 m/s 4700 50	VS2 (down)		N E S W N
	650	<pre>> bit size > </pre>	<pre>bit size > </pre>	HNGS (fmsr) HNGS (hrlad) HNGS (hrlam) HNGS (hrlar) EDTC (fmsd) EDTC (hrlarhr)	core data HLDS (repeat)	RTtrue (main) RTtrue (repeat)	main repeat	VS1 (down) VS2 (main) VS1 (main) VS2 (repeat) VS1 (repeat) VS1 (repeat)		650
3R	670									670
4R	680 -									680
5R	690 -									690
6R	700 -									700
7R	710									710
8R	720									720
9R	730									730

